



PRODUCT NO




SEE TABLE

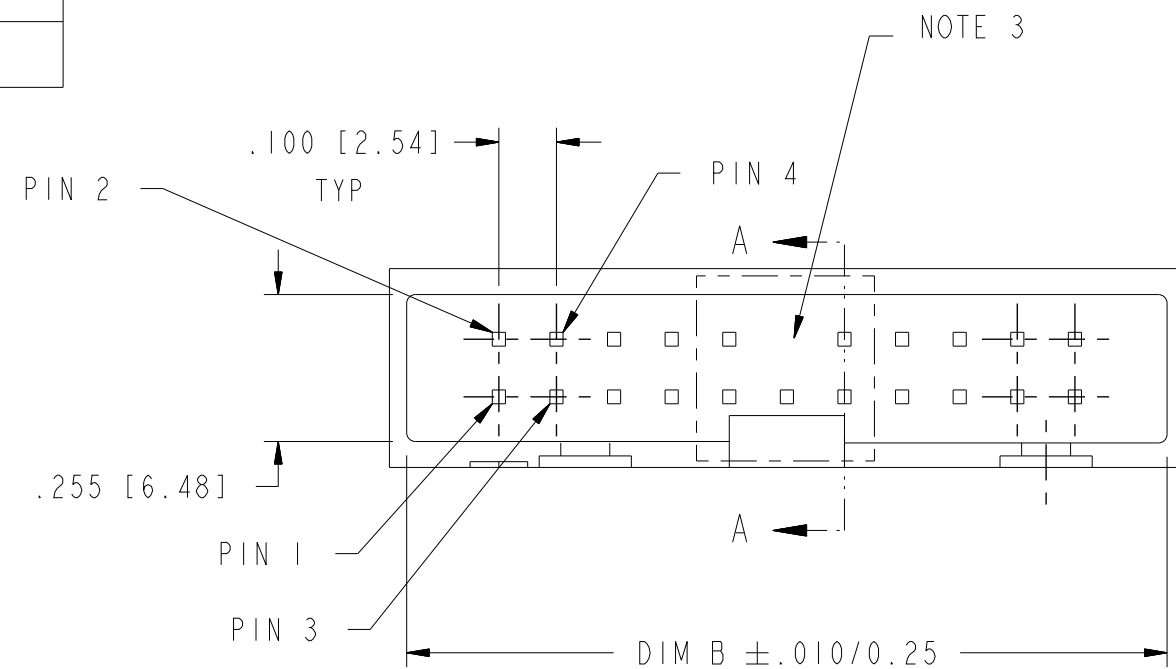


.345 [8.76] REF
⊕ ∅.006/0.15 M X

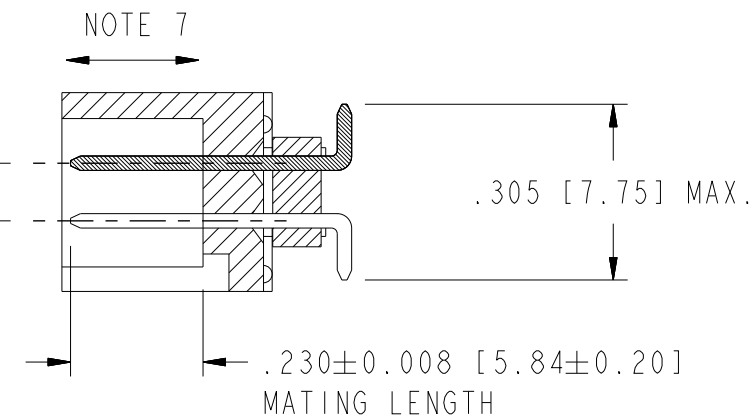

SECTION A-A

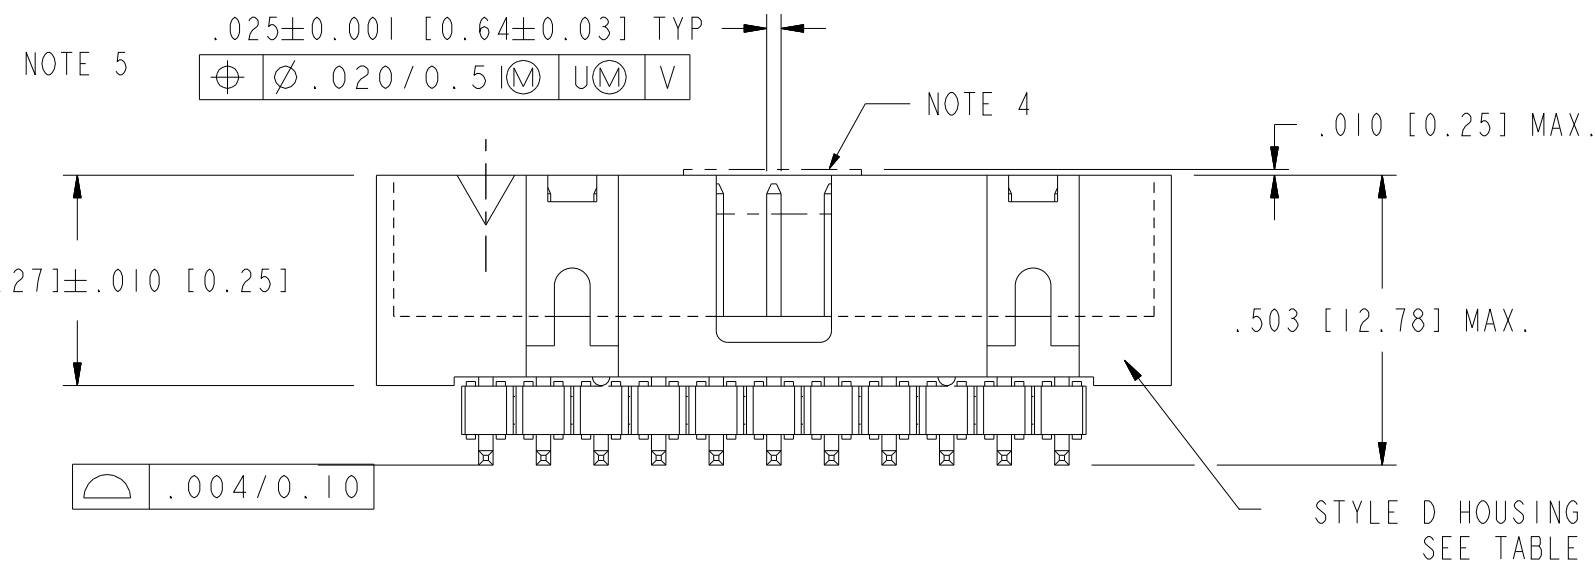

w/WINDOW OPTION
SEE TABLE

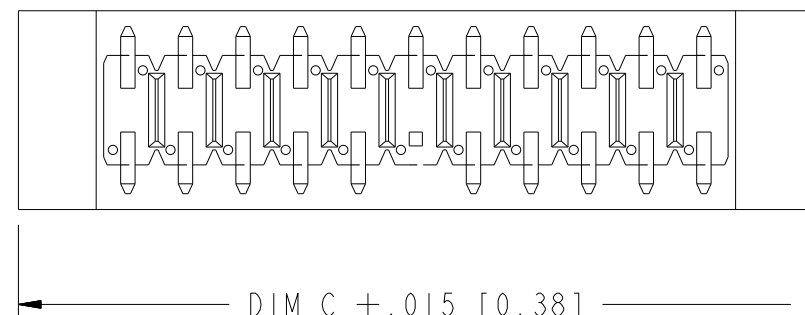


DRAWN WITHOUT WINDOW OPTION



spec ref				dr	Yong Huang	2010/10/25	projection	INCH / MM	size	A3	scale	1.000	
tolerance std	TOLERANCES UNLESS OTHERWISE SPECIFIED			eng	Zheng-Kun Hu	2013/08/27					ecn no	ELX-N-13688-1	
				chr	-	-							
ISO406 ISO1101				appr	Rick Bian	2013/08/27	product family			rel level			Released
surface	linear	0.X	±0.3		title QUICK II HDR D/R SLIMLINE SMT ASSEMBLY			dwg no	72454			rev	A
		0.XX	±0.13										
		0.XXX	±0.05										
ISO 1302	angular	0°	±2°	www.fci.com	cat. no.			Product - Customer Drw			sheet 1 of 4		

PRODUCT NO SEE TABLE	PLATING CODE	CONTACT AREA PLATING	SOLDER TAIL PLATING	
	AA	30u"/.76u GXT OVER 50u"/1.27u Ni	100u"/2.54u Sn OVER 50u"/1.27u Ni	
	4	100u"/2.54u Sn OVER 50u"/1.27u Ni	100u"/2.54u Sn OVER 50u"/1.27u Ni	

LEAD FREE PLATING	AA	30u"/.76u GXT OVER 50u"/1.27u Ni	100u"/2.54u Sn OVER 50u"/1.27u Ni	NOTE 11
	4	100u"/2.54u Sn OVER 50u"/1.27u Ni	100u"/2.54u Sn OVER 50u"/1.27u Ni	

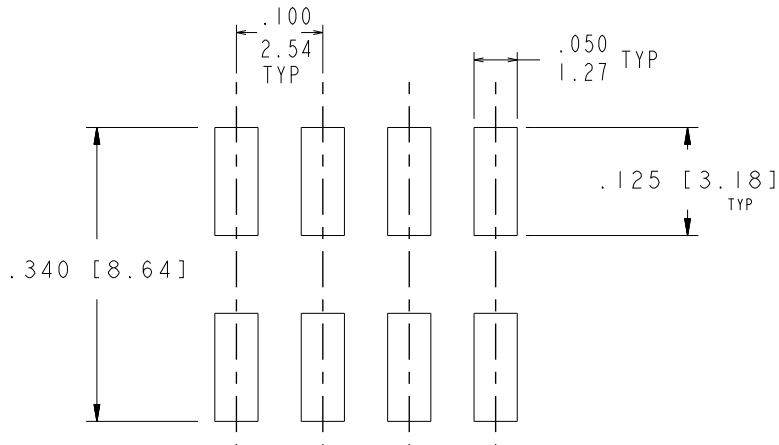


RECOMMENDED PAD LAYOUT
SCALE 4/1

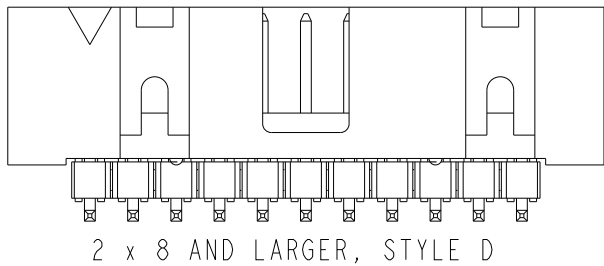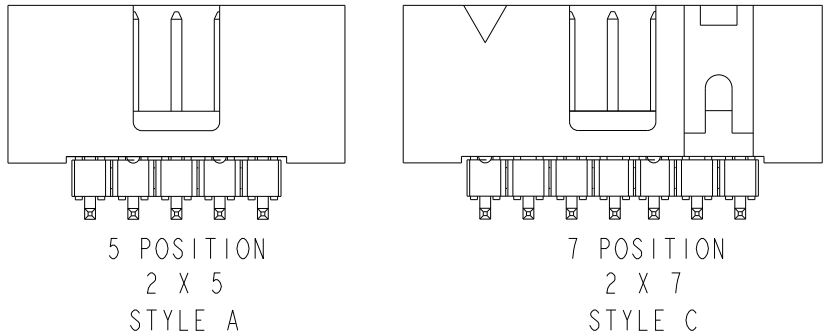


- NOTES:
1. BODY MATERIAL: PA46, GLASS FIBER REINFORCED, FLAME RETARDENT PER UL-94V-0.
COLOR: BLACK
OR
MINERAL FILLED LCP, FLAME RETARDENT PER UL-94V-0
COLOR: BLACK
 2. PIN MATERIAL: PHOS-BRONZE.
 3. PINS DELETED FROM SPECIFIED LOCATIONS FOR POLARIZATION. SEE TABLE FOR LOCATIONS.
 4. PACKAGING OPTIONS: CHECK SPECIFIC PART NUMBERS FOR AVAILABILITY.
PART NUMBERS WITHOUT A SUFFIX ARE PACKAGED
PART NUMBERS FOLLOWED BY A "V" SUFFIX ARE PACKAGED
TAPE-ON-REEL INSTALLED PER BUS-14-200 SECTION 2. VACUUM CAP TO BE CENTRALLY LOCATED REGARDLESS OF NUMBER OF POSITIONS.
PART NUMBERS FOLLOWED BY A "B" SUFFIX ARE PACKAGED IN TRAYS WITH A PICK UP CAP INSTALLED PER BUS-14-445 & SEE GS-14-920 FOR LEAD FREE PACKAGED SPEC.
 5. MEASURED WITH PART IN RESTRAINED CONDITION.
 6. TWO SIDES OF PIN TIPS NOT PLATED. TYPICAL BOTH ENDS (SIMPLEX PLATING ONLY).
 7. 2 LBS/0.9KG MIN PIN RETENTION IN EITHER DIRECTION.
 8. ADD "LF" SUFFIX AT THE END OF PART NUMBER FOR LEAD FREE OPTION.
 9. THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATION AS DESCRIBED IN GS-22-008.
 10. THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 10-20 SECONDS IN A CONVECTION, INFRA-RED OR VAPOR PHASE REFLOW OVEN. SEE APPLICATION NOTES/PROCEDURES IF THEY ARE AVAILABLE.
 11. "THIS PRODUCT HAS 100% TIN PLATING IN THE INTERFACE AND HAS NOT BEEN TESTED FOR WHISKER GROWTH IN ALL INTERCONNECT ENVIRONMENTS."
 12. PRODUCT SPEC: BUS-12-082


spec ref				dr		Yong Huang		2010/10/25		projection		INCH / MM		size		A3		scale		1.000							
tolerance std				TOLERANCES UNLESS OTHERWISE SPECIFIED								eng		Zheng-Kun Hu		2013/08/27						ecn no		ELX-N-13688-1			
ISO406 ISO1101												chr		-		-						rel level		Released			
												appr		Rick Bian		2013/08/27		product family									
surface				linear		0.X		±0.3				title		QUICK 11 HDR D/R SLIMLINE SMT ASSEMBLY						dwg no		72454		rev		AK	
						0.XX		±0.13																			
						0.XXX		±0.05																			
ISO 1302				angular		0°		±2°		www.fci.com		cat. no.				Product - Customer Drw				sheet 2 of 4							

PRODUCT NO
SEE TABLE

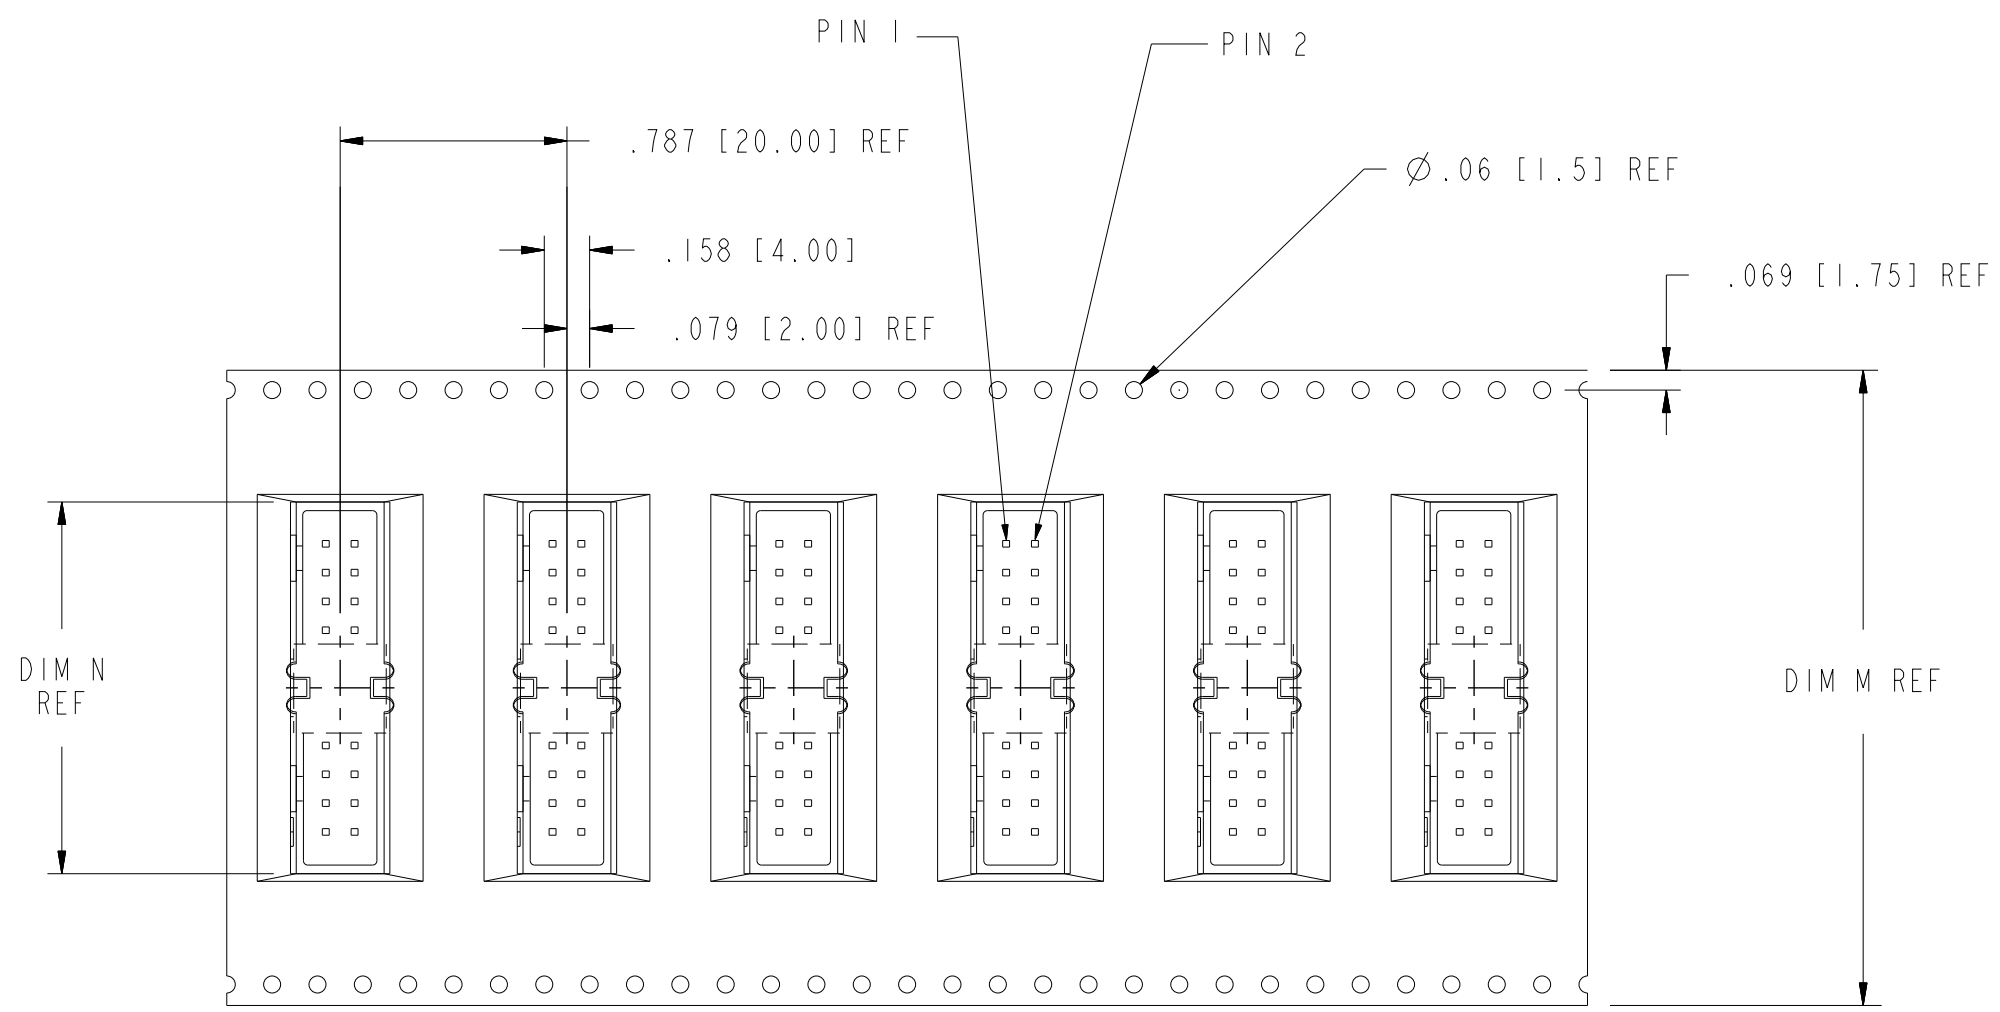

UN-REELING DIRECTION OF FEED →

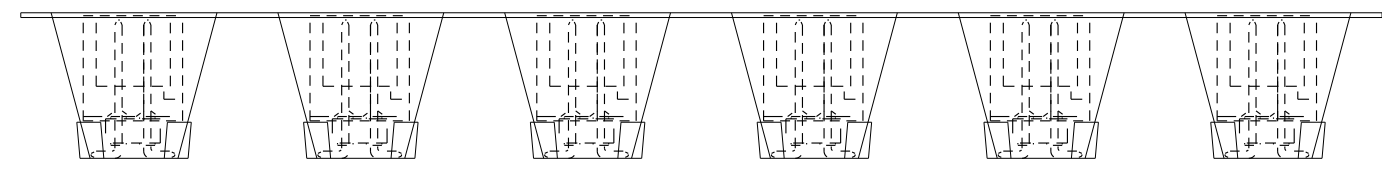

spec ref				dr		Yong Huang	2010/10/25	projection 	INCH / MM 	size	A3	scale	1.000	
tolerance std				eng		Zheng-Kun Hu	2013/08/27			ecn no				ELX-N-13688-1
TOLERANCES UNLESS OTHERWISE SPECIFIED				chr		-	-			rel level				Released
				appr		Rick Bian	2013/08/27			product family				
surface 		linear	0.X ±0.3		title	QUICK II HDR D/R SLIMLINE SMT ASSEMBLY				dwg no	72454		rev	AK
		0.XX ±0.13												
		0.XXX ±0.05												
ISO 1302		angular	0° ±2°	www.fci.com		cat. no.		Product - Customer Drw				sheet 3 of 4		

A

B

C

D


PRODUCT NUMBER	NO. OF POSITIONS	DIM B	DIM C	STYLE	POLARIZED POSITION	WINDOW OPTION	PLATING CODE	PACKAGING	TAPE WIDTH DIM M	POCKET DEPTH	DIM N	LEAD FREE OPTION
72454-008	2 X 4	.610/15.50	.690/15.33	A	-	N	AA	TRAY	--	--	--	NOTE 8,9 ↑
72454-010	2 X 5	.710/18.03	.790/20.07	A	-	N	AA	TRAY	--	--	--	
72454-010V	2 X 5	.710/18.03	.790/20.07	A	-	N	AA	TAPE ON REEL	1.260/32.00	.515/13.08	.790/20.07	
72454-014	2 X 7	.910/23.11	.99/25.2	C	-	N	AA	TRAY	--	--	--	
72454-014V	2 X 7	.910/23.11	.99/25.2	C	-	N	AA	TAPE ON REEL	1.732/44.00	.515/13.08	1.090/27.69	
72454-016	2 X 8	1.010/25.65	1.090/27.69	D	-	N	AA	TRAY	--	--	--	
72454-016V	2 X 8	1.010/25.65	1.090/27.69	D	-	N	AA	TAPE ON REEL	1.732/44.00	.515/13.08	1.090/27.69	
72454-020	2 X 10	1.210/30.73	1.290/32.77	D	-	N	AA	TRAY	--	--	--	
72454-020V	2 X 10	1.210/30.73	1.290/32.77	D	-	N	AA	TAPE-ON-REEL	2.205/56.00	.505/12.83	1.290/32.77	
72454-021	2 X 11	1.310/33.27	1.390/35.31	D	12	N	AA	TRAY	--	--	--	
72454-022	2 X 11	1.310/33.27	1.390/35.31	D	-	N	AA	TRAY	--	--	--	
72454-024	2 X 12	1.410/35.81	1.490/37.9	D	-	N	AA	--	--	--	--	
72454-024V	2 X 12	1.410/35.81	1.490/37.9	D	-	N	AA	TAPE-ON-REEL	2.205/56.00	.515/13.08	1.490/37.85	
72454-026	2 X 13	1.510/38.35	1.590/40.39	D	-	N	AA	TRAY	--	--	--	
72454-026V	2 X 13	1.510/38.35	1.590/40.39	D	-	N	AA	TAPE-ON-REEL	2.205/56.00	0.787/20.00	1.614/41.00	
72454-030	2 X 15	1.710/43.43	1.790/45.47	D	-	N	AA	TRAY	--	--	--	
72454-030V	2 X 15	1.710/43.43	1.790/45.47	D	-	N	AA	TAPE-ON-REEL	2.834/72.00	0.787/20.00	1.771/45.00	
72454-034	2 X 17	1.910/48.51	1.990/50.60	D	-	N	AA	TRAY	--	--	--	NOTE 8,9 ↓
72454-040	2 X 20	2.210/56.13	2.290/58.17	D	-	N	4	TRAY	--	--	--	
72454-040V	2 X 20	2.210/56.13	2.290/58.17	D	-	N	4	TAPE-ON-REEL	3.465/88.00	0.787/20.00	2.290/58.25	
72454-041	2 X 20	2.210/56.13	2.290/58.17	D	-	N	AA	TRAY	--	--	--	
72454-041V	2 X 20	2.210/56.13	2.290/58.17	D	-	N	AA	TAPE-ON-REEL	3.465/88.00	0.787/20.00	2.290/58.25	
72454-044	2 X 22	2.410/61.21	2.490/63.25	D	-	N	AA	TRAY	--	--	--	
72454-050	2 X 25	2.710/68.83	2.790/70.87	D	-	N	AA	TRAY	--	--	--	
72454-051	2 X 10	1.210/30.73	1.290/32.77	D	-	Y	AA	TRAY	--	--	--	
72454-051V	2 X 10	1.210/30.73	1.290/32.77	D	-	Y	AA	TAPE-ON-REEL	2.205/56.00	.505/12.83	1.290/32.77	
72454-052	2 X 20	2.210/56.13	2.290/58.17	D	20	N	AA	TRAY	--	--	--	
72454-053V	2 X 5	0.710/18.03	0.790/20.07	A	9	N	AA	TAPE ON REEL	1.260/32.00	.515/13.08	.790/20.07	

A

B

C

D

spec ref				dr	Yong Huang	2010/10/25	projection 	INCH / MM ← →	size	A3	scale	1.000	
tolerance std ISO406 ISO1101				eng	Zheng-Kun Hu	2013/08/27			ecn no ELX-N-13688-1				
				chr	-	-			rel level Released				
surface  ISO 1302				linear	0.X	±0.3		QUICK II HDR D/R SLIMLINE SMT ASSEMBLY	dwg no 72454	rev AK	Product - Customer Drw		sheet 4 of 4
					0.XX	±0.13							
					0.XXX	±0.05							
angular				0°	±2°	www.fci.com	cat. no.						

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[FCI / Amphenol:](#)

[72454-016VLF](#) [72454-020VLF](#) [72454-014VLF](#) [72454-010LF](#) [72454-010VLF](#) [72454-014LF](#) [72454-016LF](#) [72454-020LF](#) [72454-030LF](#) [72454-034LF](#) [72454-040LF](#) [72454-026VLF](#) [72454-034VLF](#)