


Material	High Conductivity Seamless Copper Tube
Plating	Electro-Tin
Wire Size	1 STR/FLEX
Wire Type	Stranded Copper: Class B & C, Compact, Class G, H, I, K, M, Locomotive
Wire Strip Length	1-1/2 in.
Stud Size	1/4 in.
UL Listed Wire Connector	Yes, for applications up to 35kv. Consult cable manufacturer for voltage stress relief instructions with applications greater than 2000 volts.
UL Temperature Rating	90° C
C.S.A Certified Wire Connector	Yes
Panduit Color Code on Barrel	GREEN
Panduit Die Index No. on Barrel	P37
Alternate Industry Die Index No. () on Barrel	(11)



Technical drawing of a Panduit 1 STR/FLEX LCCX1-14AH connector. The drawing shows a side view of the connector with dimensions and labels. The main body is rectangular with a width of $.76 \pm .04$. The mounting holes are spaced $.32 \pm .04$ apart from the left edge and $.63 \pm .02$ apart from each other. The connector has a $.38$ R REF radius on the top edge and a $.27 \pm .02$ DIA (2) PLS diameter on the bottom edge. The text "PANDUIT" and "1 STR/FLEX LCCX1-14AH" is printed on the side.

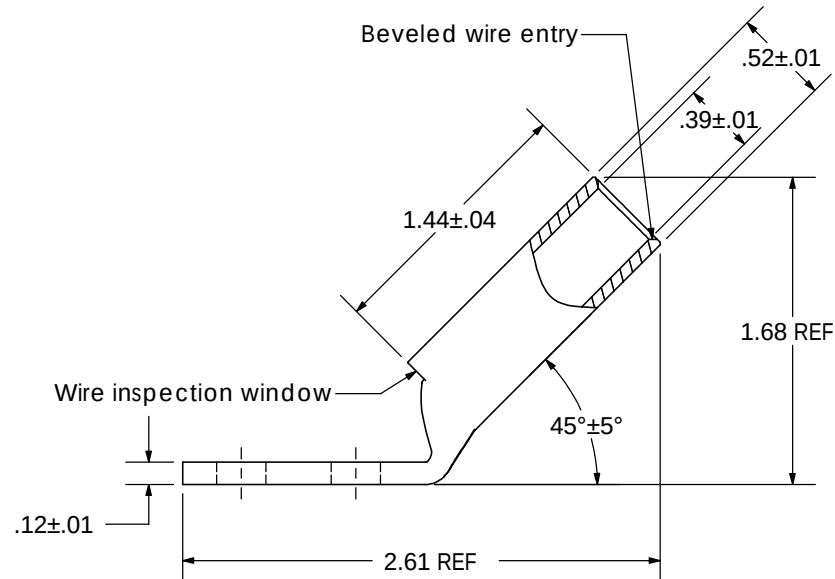

						 PANDUIT CORP. TINLEY PARK, ILLINOIS
00	6/03	SAC	SAC	RELEASED	10850	LCCX1-14AH-X Copper Lug - Two-Hole, Long Flex Barrel with Window, 45° Angle Tongue
REV	DATE	BY	CHK	DESCRIPTION	ECN	SCALE N/A DRAWING NO / CAD FILE LCCX1-14AH-CUST

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Panduit:

[LCCX1-14AH-X](#)