


In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.


Apr.1.2020 Copyright 2020 HIROSE ELECTRIC CO., LTD. All Rights Reserved.

5	6	7	8
COUNT DESCRIPTION OF REVISIONS	BY	CHKD	DATE


A B C D E F

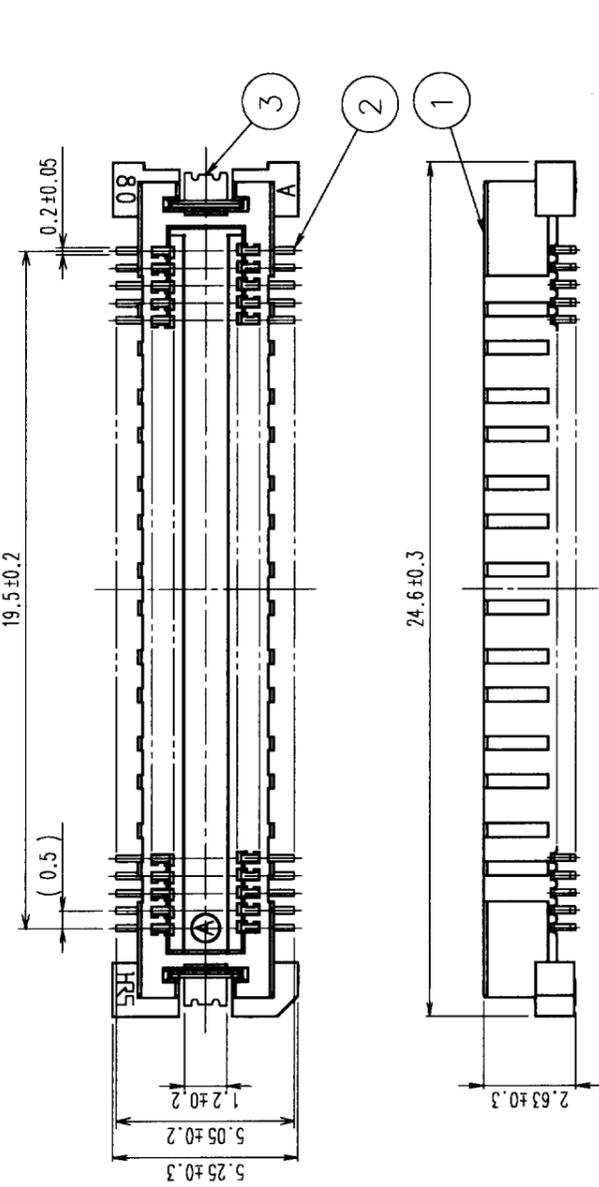

RECOMMENDED LAND PATTERN DIMENSION OF PCB

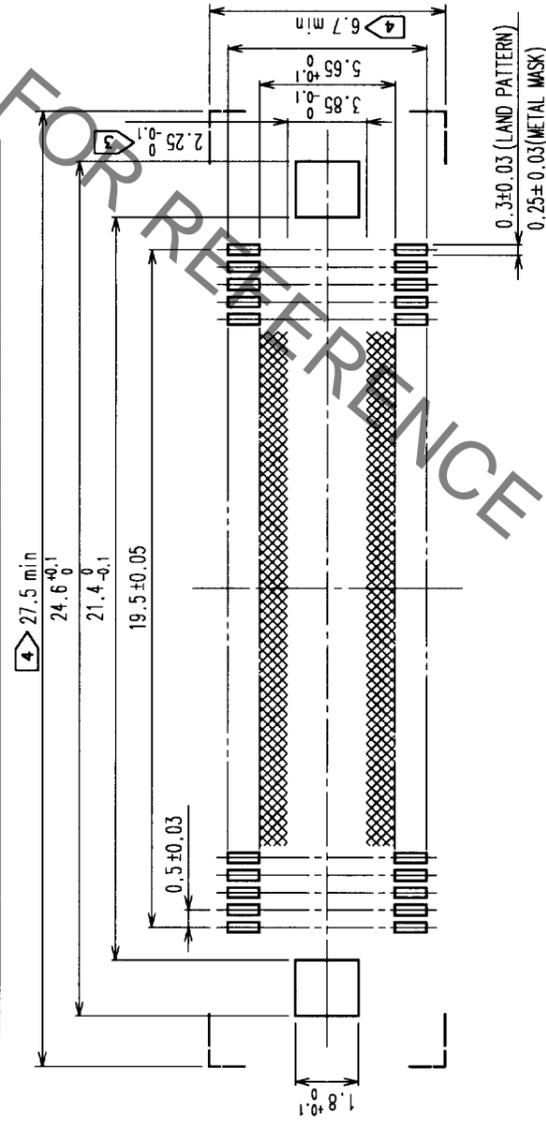

SIGNAL PORTION CROSS SECTION (10:1)

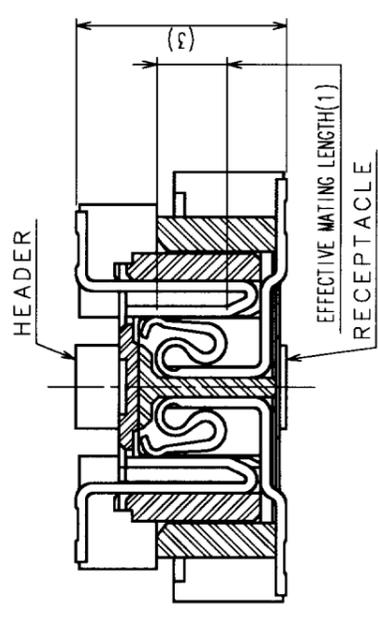

2	COPPER ALLOY	CONTACT AREA: GOLD (0.1mm) OVER NICKEL LEAD: GOLD FLASH OVER NICKEL		
1	LCP	BEIGE UL94V-0		
NO.	MATERIAL	FINISH, REMARKS		
CODE NO. (OLD)	CL	CL		
3	PHOSPHOR BRONZE	TIN PLATED		
DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED
00.05.08	A. Matsukawa	H. Okawa	M. Yoshimura	00.05.09
00.05.08	00.05.08	00.05.08	00.05.09	00.05.09

DRAWING NO.	EDC3-152631	PART NO.	FX11B-80P-SV0.5
SCALE	5:1	CODE NO.	CL573-0658-9
UNITS	mm		

- NOTES
- SMT LEAD-COPLANARITY: 0.1 MAX.
  - THIS PRODUCT HAS NO POLARITY TO PATTERN FOR MOUNTING.
  - MAKE SURE WIDTH OF PATTERN IS WITHIN THAT OF LAND .OR LEAD MAY TOUCH PATTERN. (THIS APPLIES TO HATCHED AREA.)
  - DO NOT MOUNT OTHER DEVICES ONTO [ ] AREA ,OR MATING PAIR CANNOT BE MATED.

TO	
PCK	