


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC		DIST		REVISIONS			
AD	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		R2		REVISED PER ECO-11-004820	11MAR11	RK	HMR

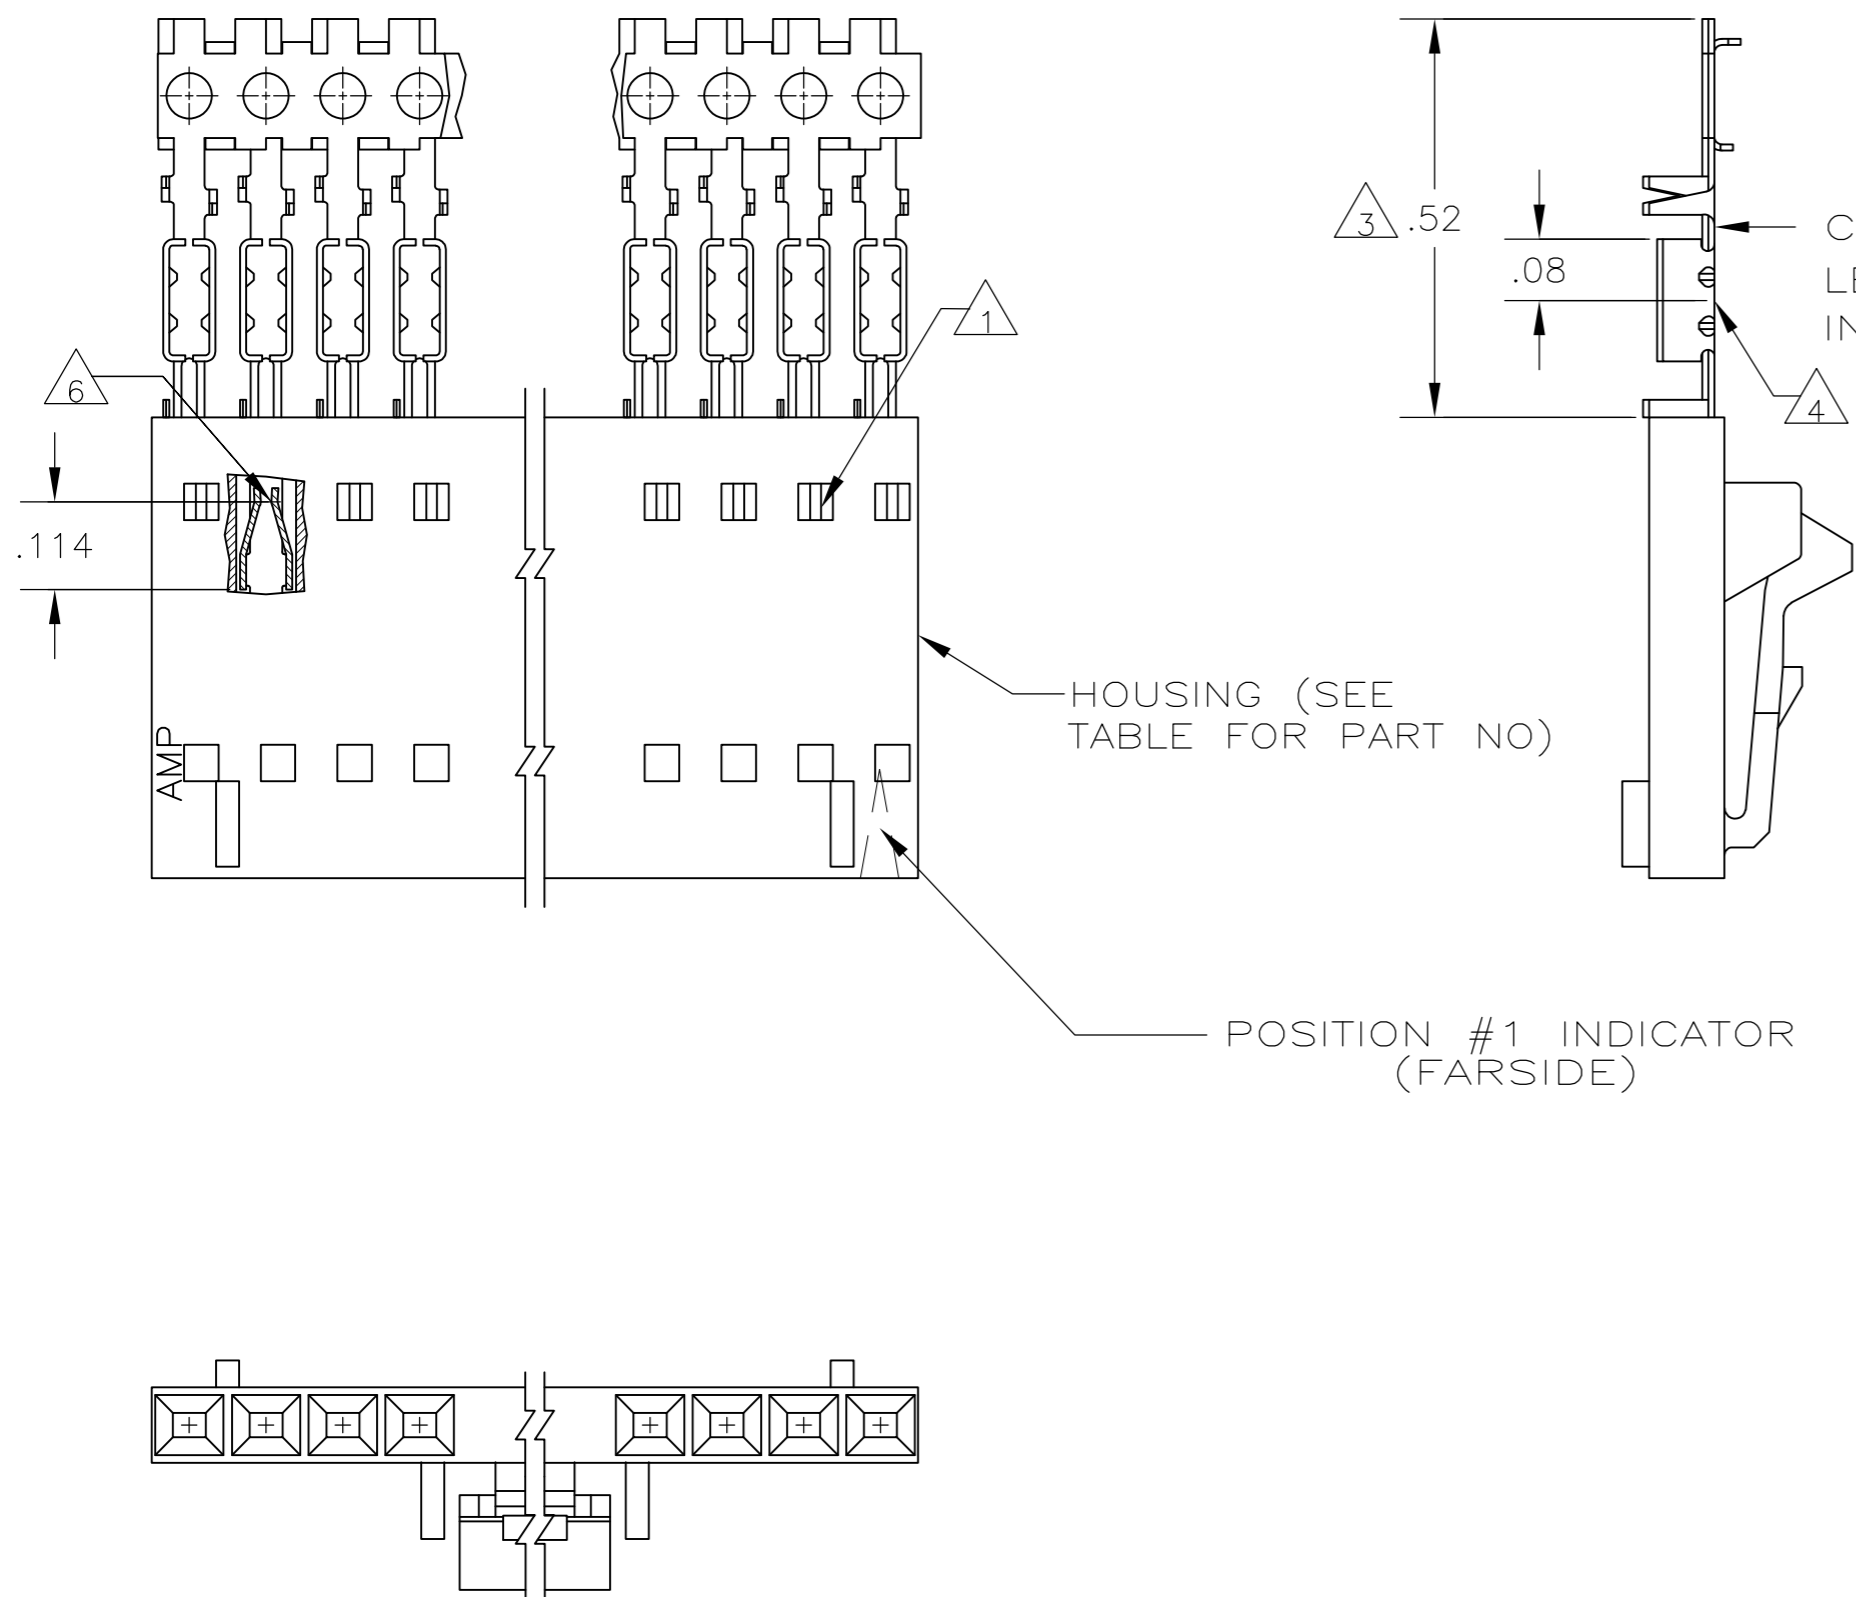

CONTACT IDENTIFICATION LETTER "B" (LOCATED IN THIS AREA)

HOUSING (SEE TABLE FOR PART NO)
 POSITION #1 INDICATOR (FAR SIDE)

- 1 CONTACTS ARE LATCHED INTO THE PRELOAD WINDOWS
- 2 USE WITH #22-#26 AWG WIRE SIZE, .054/.030 INSULATION DIAMETER, .015 MAXIMUM INSULATION THICKNESS
- 3 THE DIMENSION APPLIES WITH THE FORWARD PRELOAD STOP IN CONTACT WITH THE HOUSING SURFACE
- 4 POINT OF MEASUREMENT FOR PLATING THICKNESS
- 5 FOR STRIP ASSEMBLIES SEE PART NUMBER 103957
- 6 POINT OF MEASUREMENT FOR PLATING THICKNESS (INSIDE BEAMS)
- 7 FINISH: CONTACTS: .000015 GOLD IN THE CONTACT AREA,.000050-.000100 BRIGHT TIN-LEAD ON THE TERMINATION AREA, ALL OVER .000050 NICKEL
- 8 .000015 GOLD IN THE CONTACT AREA,.000050-.000100 MATTE TIN ON THE TERMINATION AREA, ALL OVER .000050 NICKEL
- 9 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

9	OBSOLETE	8	2-104257-4	25	7-103644-4
9	OBSOLETE	8	2-104257-3	24	7-103644-3
9	OBSOLETE	8	2-104257-2	23	7-103644-2
9	OBSOLETE	8	2-104257-1	22	7-103644-1
		8	2-104257-0	21	7-103644-0
9	OBSOLETE	8	1-104257-9	20	6-103644-9
9	OBSOLETE	8	1-104257-8	19	6-103644-8
9	OBSOLETE	8	1-104257-7	18	6-103644-7
9	OBSOLETE	8	1-104257-6	17	6-103644-6
9	OBSOLETE	8	1-104257-5	16	6-103644-5
9	OBSOLETE	8	1-104257-4	15	6-103644-4
		8	1-104257-3	14	6-103644-3
		8	1-104257-2	13	6-103644-2
		7	2-104257-4	25	2-103644-4
9	OBSOLETE	7	2-104257-3	24	2-103644-3
9	OBSOLETE	7	2-104257-2	23	2-103644-2
9	OBSOLETE	7	2-104257-1	22	2-103644-1
9	SUPERSEDED BY 7-103644-0	7	2-104257-0	21	2-103644-0
		7	1-104257-9	20	1-103644-9
9	OBSOLETE	7	1-104257-8	19	1-103644-8
		7	1-104257-7	18	1-103644-7
		7	1-104257-6	17	1-103644-6
		7	1-104257-5	16	1-103644-5
		7	1-104257-4	15	1-103644-4
		7	1-104257-3	14	1-103644-3
		7	1-104257-2	13	1-103644-2

SUPERSEDED BY 1-103957-1	1-104257-1	12	1-103644-1
SUPERSEDED BY 1-103957-0	1-104257-0	11	1-103644-0
SUPERSEDED BY 103957-9	104257-9	10	103644-9
SUPERSEDED BY 103957-8	104257-8	9	103644-8
SUPERSEDED BY 103957-7	104257-7	8	103644-7
SUPERSEDED BY 103957-6	104257-6	7	103644-6
SUPERSEDED BY 103957-5	104257-5	6	103644-5
SUPERSEDED BY 103957-4	104257-4	5	103644-4
SUPERSEDED BY 103957-3	104257-3	4	103644-3
SUPERSEDED BY 103957-2	104257-2	3	103644-2
SUPERSEDED BY 103957-1	104257-1	2	103644-1

PLATING	HOUSING PART NUMBER	NO OF POSN	ASSEMBLY PART NUMBER
---------	---------------------	------------	----------------------

THIS DRAWING IS A CONTROLLED DOCUMENT. DWN L A MAYER 11-4-86
 CHK P de Jong 11-12-86
 APVD -
 PRODUCT SPEC 108-25034
 APPLICATION SPEC 114-25026
 MATERIAL HOUSING: FLAME RETARDANT THERMOPLASTIC, COLOR-BLACK
 FINISH SEE TABLE
 WEIGHT -
 CUSTOMER DRAWING
 NAME RCPT ASSY, AMPMODU MTE, SINGLE ROW,.100 C/L LATCHED AND POLARIZED, FOR NO 22- NO 26 AWG WIRE SIZE
 SIZE A2 CAGE CODE 00779 DRAWING NO C=103644
 RESTRICTED TO -
 SCALE 4:1 SHEET 1 of 1 REV R2

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-103644-3](#)