



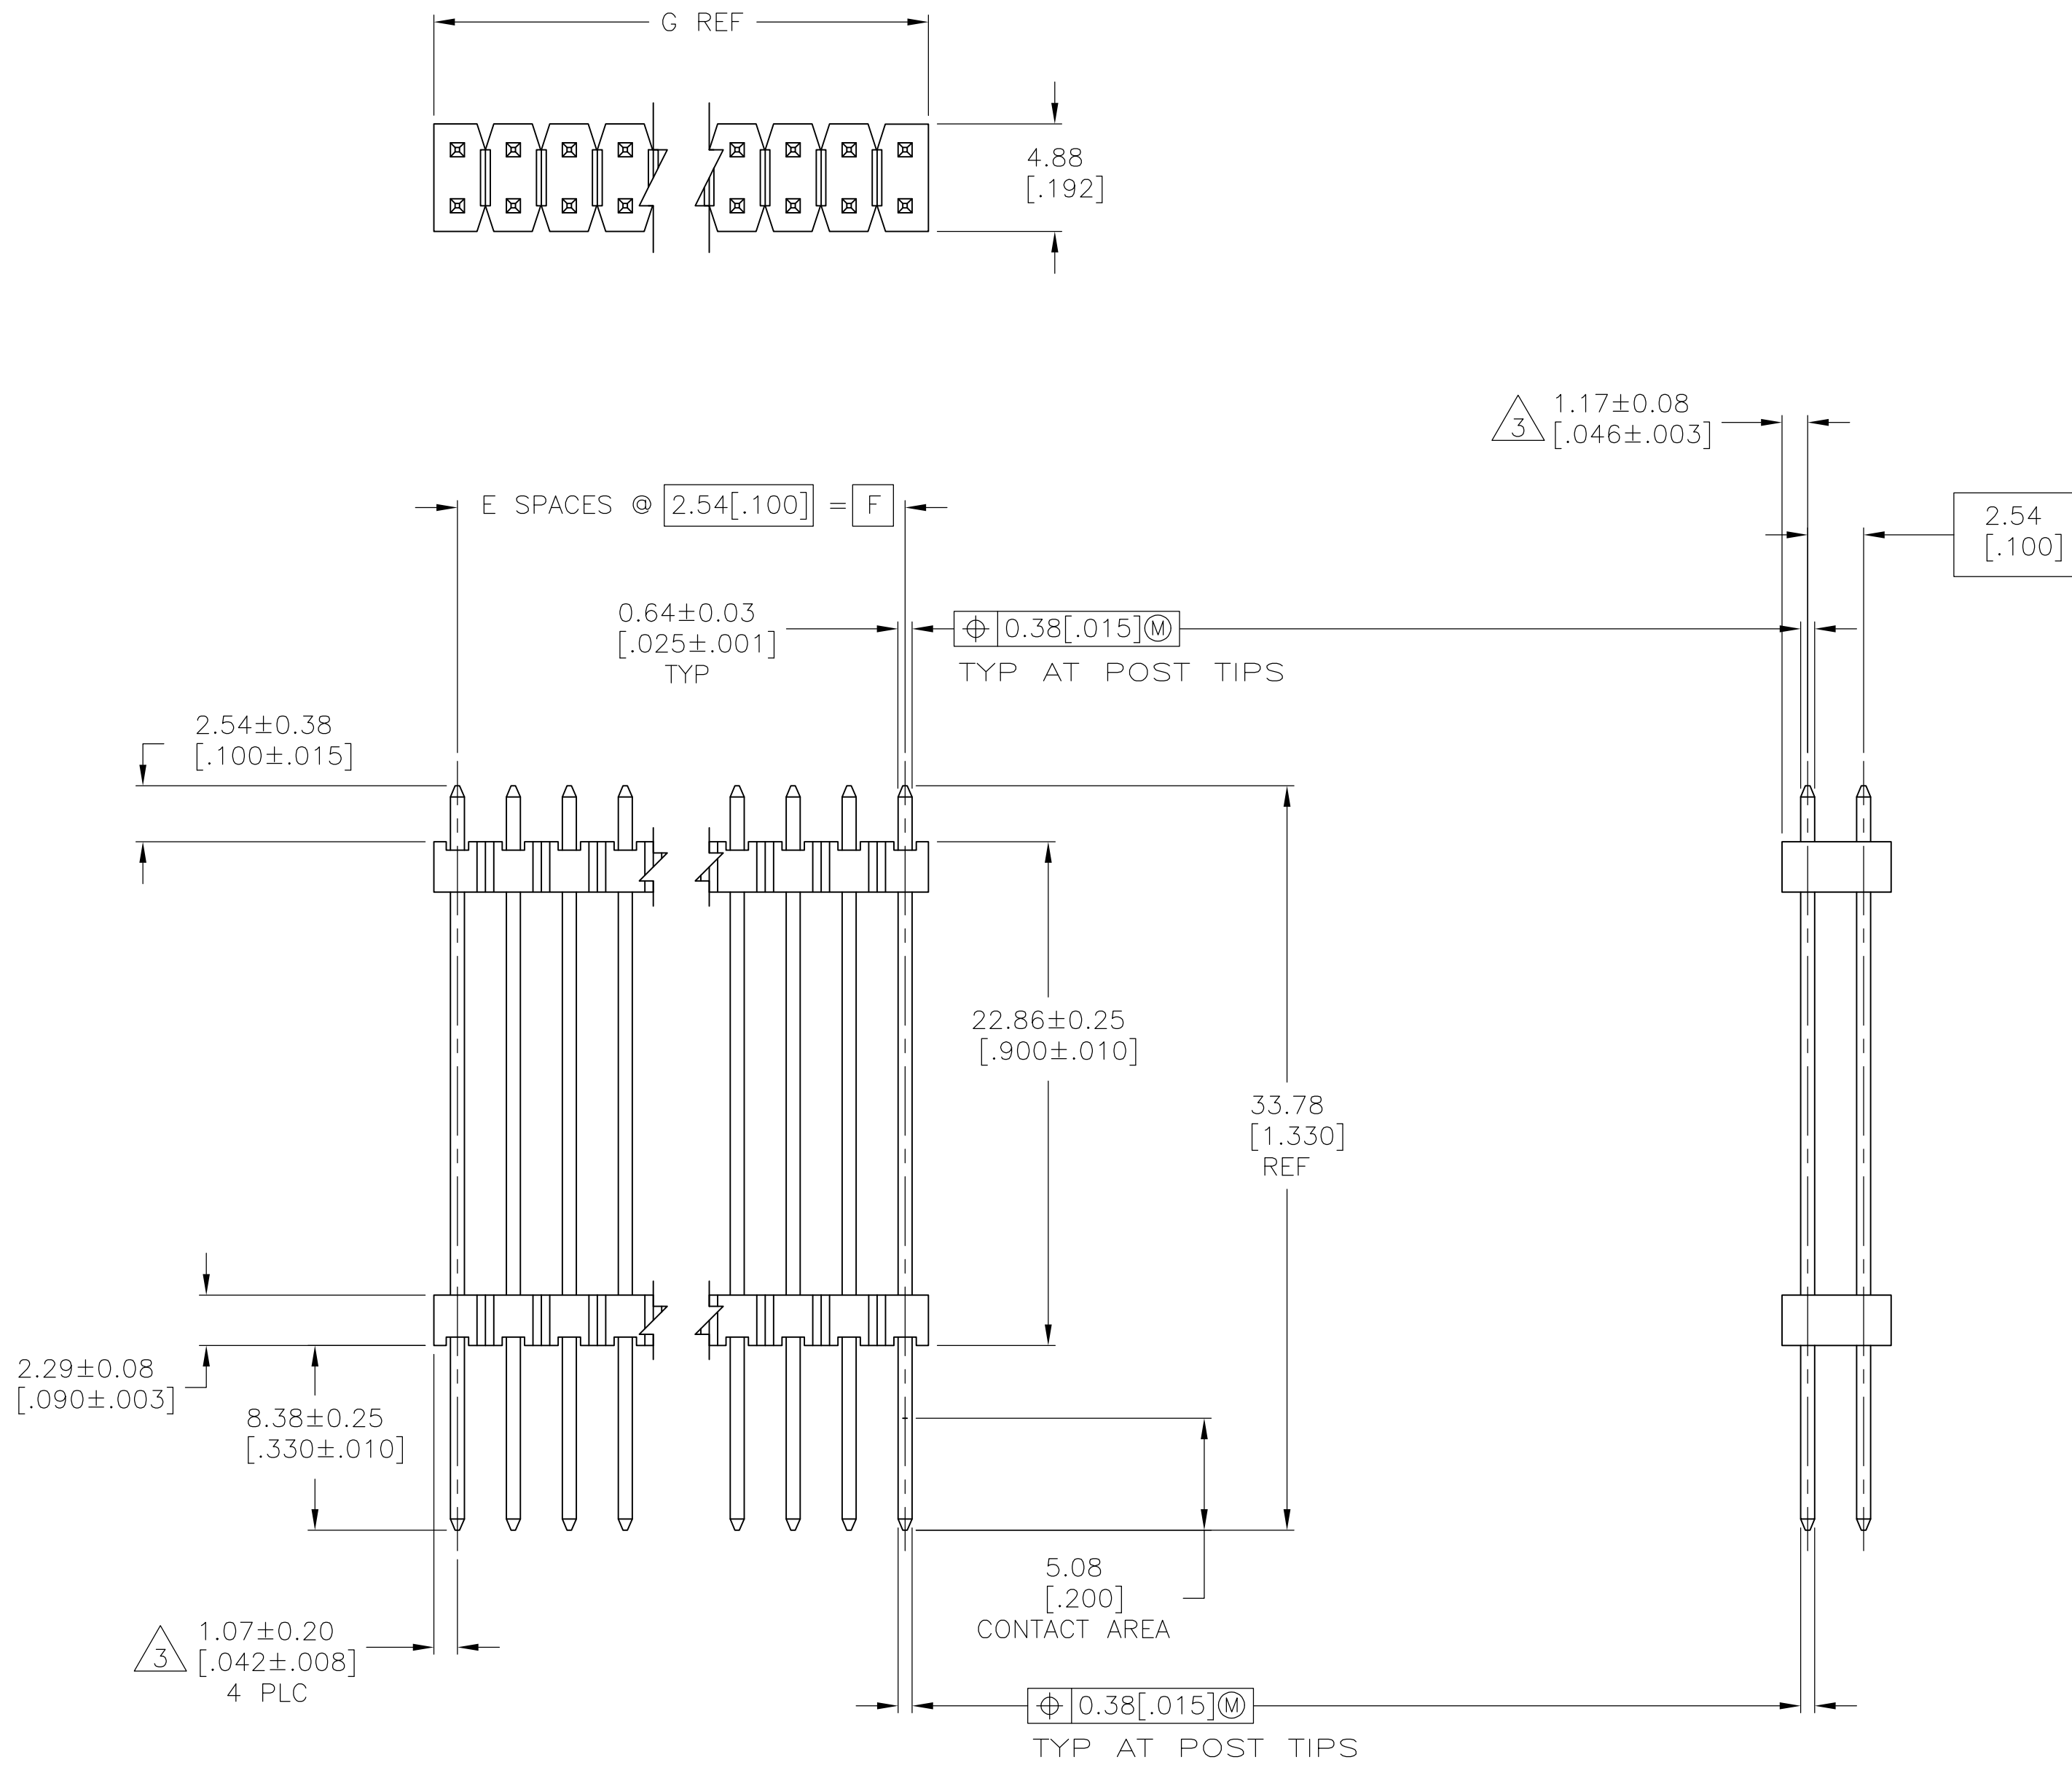

1. ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS
2. TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADER IS HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD
3. THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING
4. HOUSING: FLAME RETARDANT THERMOPLASTIC; COLOR: BLACK.
5. FINISH: 0.000381 [.000015] GOLD ON CONTACT AREA, 0.00254-0.00508 [.000100-.000200] MATTE TIN-LEAD ON SOLDER TAIL, 0.00127 [.000050] NICKEL ENTIRE POST.
6. FINISH: 0.000381 [.000015] GOLD ON CONTACT AREA, 0.00254-0.00508 [.000100-.000200] MATTE TIN ON SOLDER TAIL, 0.00127 [.000050] NICKEL ENTIRE POST.

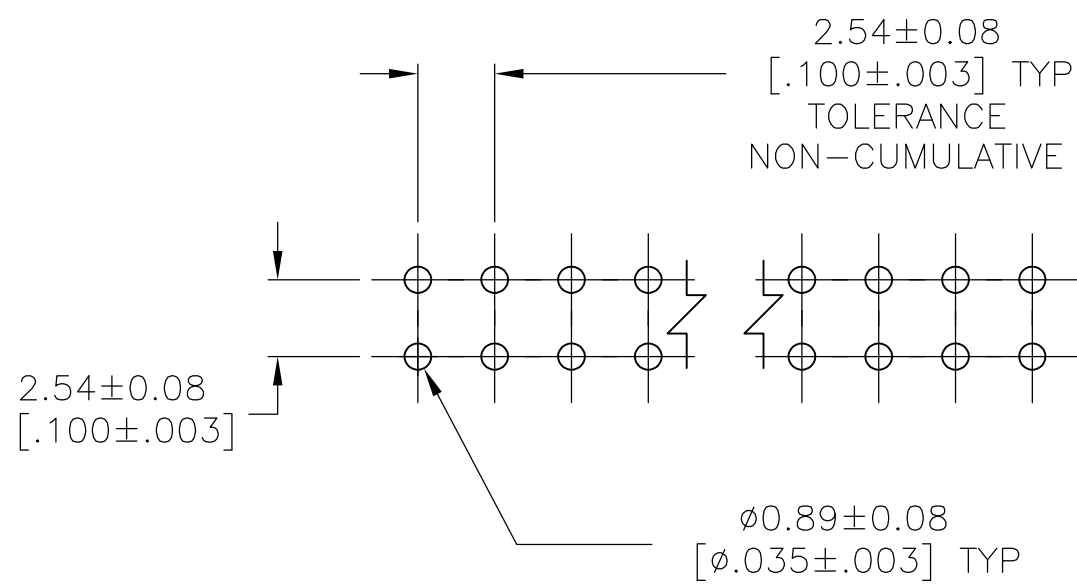

RECOMMENDED HOLE LAYOUT

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R BROWN 19OCT2006	TE Connectivity	
DIMENSIONS: mm [INCHES]		CHK J GESFORD 19OCT2006		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD J GESFORD 19OCT2006	NAME	
0 PLC ± -		PRODUCT SPEC	HEADER ASSEMBLY, MOD II, STACKING, DOUBLE ROW, .025 SQ.POST, UNSHROUDED	
1 PLC ± 0.5[.02]		APPLICATION SPEC	SIZE	
2 PLC ± 0.13[.005]		—	CAGE CODE	
3 PLC ± -		—	DRAWING NO	
4 PLC ± -		—	RESTRICTED TO	
ANGLES ± -		—	A1 00779	
FINISH SEE TABLE		WEIGHT —	146506	
MATERIAL		CUSTOMER DRAWING	SCALE 4:1	
4		SHEET 1 OF 2		REV A1

8

7

6

5

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED.

LOCAD

DIST00

REV

DATE

BY

APPROVED

DESCRIPTION

SEE SHEET 1

△₆	101.19 [3.984]	99.06 [3.900]	39	80	9-146506-0
△₆	98.65 [3.884]	96.52 [3.800]	38	78	8-146506-9
△₆	96.11 [3.784]	93.98 [3.700]	37	76	8-146506-8
△₆	93.57 [3.684]	91.44 [3.600]	36	74	8-146506-7
△₆	91.03 [3.584]	88.90 [3.500]	35	72	8-146506-6
△₆	88.49 [3.484]	86.36 [3.400]	34	70	8-146506-5
△₆	85.95 [3.384]	83.82 [3.300]	33	68	8-146506-4
△₆	83.41 [3.284]	81.28 [3.200]	32	66	8-146506-3
△₆	80.87 [3.184]	78.74 [3.100]	31	64	8-146506-2
△₆	78.33 [3.084]	76.20 [3.000]	30	62	8-146506-1
△₆	75.79 [2.984]	73.66 [2.900]	29	60	8-146506-0
△₆	73.25 [2.884]	71.12 [2.800]	28	58	7-146506-9
△₆	70.71 [2.784]	68.58 [2.700]	27	56	7-146506-8
△₆	68.17 [2.684]	66.04 [2.600]	26	54	7-146506-7
△₆	65.63 [2.584]	63.50 [2.500]	25	52	7-146506-6
△₆	63.09 [2.484]	60.96 [2.400]	24	50	7-146506-5
△₆	60.55 [2.384]	58.42 [2.300]	23	48	7-146506-4
△₆	58.01 [2.284]	55.88 [2.200]	22	46	7-146506-3
△₆	55.47 [2.184]	53.34 [2.100]	21	44	7-146506-2
△₆	52.93 [2.084]	50.80 [2.000]	20	42	7-146506-1
△₆	50.39 [1.984]	48.26 [1.900]	19	40	7-146506-0
△₆	47.85 [1.884]	45.72 [1.800]	18	38	6-146506-9
△₆	45.31 [1.784]	43.18 [1.700]	17	36	6-146506-8
△₆	42.77 [1.684]	40.64 [1.600]	16	34	6-146506-7
△₆	40.23 [1.584]	38.10 [1.500]	15	32	6-146506-6
△₆	37.69 [1.484]	35.56 [1.400]	14	30	6-146506-5
△₆	35.15 [1.384]	33.02 [1.300]	13	28	6-146506-4
△₆	32.61 [1.284]	30.48 [1.200]	12	26	6-146506-3
△₆	30.07 [1.184]	27.94 [1.100]	11	24	6-146506-2
△₆	27.53 [1.084]	25.40 [1.000]	10	22	6-146506-1
△₆	24.99 [.984]	22.86 [.900]	9	20	6-146506-0
△₆	22.45 [.884]	20.32 [.800]	8	18	5-146506-9
△₆	19.91 [.784]	17.78 [.700]	7	16	5-146506-8
△₆	17.37 [.684]	15.24 [.600]	6	14	5-146506-7
△₆	14.83 [.584]	12.70 [.500]	5	12	5-146506-6
△₆	12.29 [.484]	10.16 [.400]	4	10	5-146506-5
△₆	9.75 [.384]	7.62 [.300]	3	8	5-146506-4
△₆	7.21 [.284]	5.08 [.200]	2	6	5-146506-3
△₆	4.67 [.184]	2.54 [.100]	1	4	5-146506-2
△₆	2.13 [.084]	-	-	2	5-146506-1
PLATING	G	F	E	NO. OF POSITIONS	PART NUMBER

△₅	101.19 [3.984]	99.06 [3.900]	39	80	4-146506-0
△₅	98.65 [3.884]	96.52 [3.800]	38	78	3-146506-9
△₅	96.11 [3.784]	93.98 [3.700]	37	76	3-146506-8
△₅	93.57 [3.684]	91.44 [3.600]	36	74	3-146506-7
△₅	91.03 [3.584]	88.90 [3.500]	35	72	3-146506-6
△₅	88.49 [3.484]	86.36 [3.400]	34	70	3-146506-5
△₅	85.95 [3.384]	83.82 [3.300]	33	68	3-146506-4
△₅	83.41 [3.284]	81.28 [3.200]	32	66	3-146506-3
△₅	80.87 [3.184]	78.74 [3.100]	31	64	3-146506-2
△₅	78.33 [3.084]	76.20 [3.000]	30	62	3-146506-1
△₅	75.79 [2.984]	73.66 [2.900]	29	60	3-146506-0
△₅	73.25 [2.884]	71.12 [2.800]	28	58	2-146506-9
△₅	70.71 [2.784]	68.58 [2.700]	27	56	2-146506-8
△₅	68.17 [2.684]	66.04 [2.600]	26	54	2-146506-7
△₅	65.63 [2.584]	63.50 [2.500]	25	52	2-146506-6
△₅	63.09 [2.484]	60.96 [2.400]	24	50	2-146506-5
△₅	60.55 [2.384]	58.42 [2.300]	23	48	2-146506-4
△₅	58.01 [2.284]	55.88 [2.200]	22	46	2-146506-3
△₅	55.47 [2.184]	53.34 [2.100]	21	44	2-146506-2
△₅	52.93 [2.084]	50.80 [2.000]	20	42	2-146506-1
△₅	50.39 [1.984]	48.26 [1.900]	19	40	2-146506-0
△₅	47.85 [1.884]	45.72 [1.800]	18	38	1-146506-9
△₅	45.31 [1.784]	43.18 [1.700]	17	36	1-146506-8
△₅	42.77 [1.684]	40.64 [1.600]	16	34	1-146506-7
△₅	40.23 [1.584]	38.10 [1.500]	15	32	1-146506-6
△₅	37.69 [1.484]	35.56 [1.400]	14	30	1-146506-5
△₅	35.15 [1.384]	33.02 [1.300]	13	28	1-146506-4
△₅	32.61 [1.284]	30.48 [1.200]	12	26	1-146506-3
△₅	30.07 [1.184]	27.94 [1.100]	11	24	1-146506-2
△₅	27.53 [1.084]	25.40 [1.000]	10	22	1-146506-1
△₅	24.99 [.984]	22.86 [.900]	9	20	1-146506-0
△₅	22.45 [.884]	20.32 [.800]	8	18	146506-9
△₅	19.91 [.784]	17.78 [.700]	7	16	146506-8
△₅	17.37 [.684]	15.24 [.600]	6	14	146506-7
△₅	14.83 [.584]	12.70 [.500]	5	12	146506-6
△₅	12.29 [.484]	10.16 [.400]	4	10	146506-5
△₅	9.75 [.384]	7.62 [.300]	3	8	146506-4
△₅	7.21 [.284]	5.08 [.200]	2	6	146506-3
△₅	4.67 [.184]	2.54 [.100]	1	4	146506-2
△₅	2.13 [.084]	-	-	2	146506-1
PLATING	G	F	E	NO. OF POSITIONS	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm [INCHES]

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ± -

1 PLC ± 0.5[.02]

2 PLC ± 0.13[.005]

3 PLC ± -

4 PLC ± -

ANGLES ± -

FINISH SEE TABLE

4

DWN R BROWN 19OCT2006

CHK J GESFORD 19OCT2006

APVD J GESFORD 19OCT2006

PRODUCT SPEC

APPLICATION SPEC

WEIGHT -

CUSTOMER DRAWING

NAME

HEADER ASSEMBLY, MOD II,
STACKING, DOUBLE ROW,
.025 SQ.POST, UNSHROUDED

SIZE CAGE CODE DRAWING NO

A100779C146506

RESTRICTED TO

-

SCALE 4:1

SHEET 2 OF 2

REV A1

TE Connectivity

4805 (3/11)

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[7-146506-6](#)