

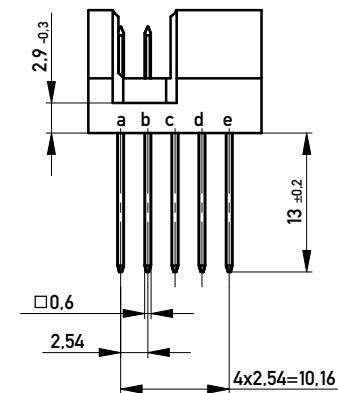


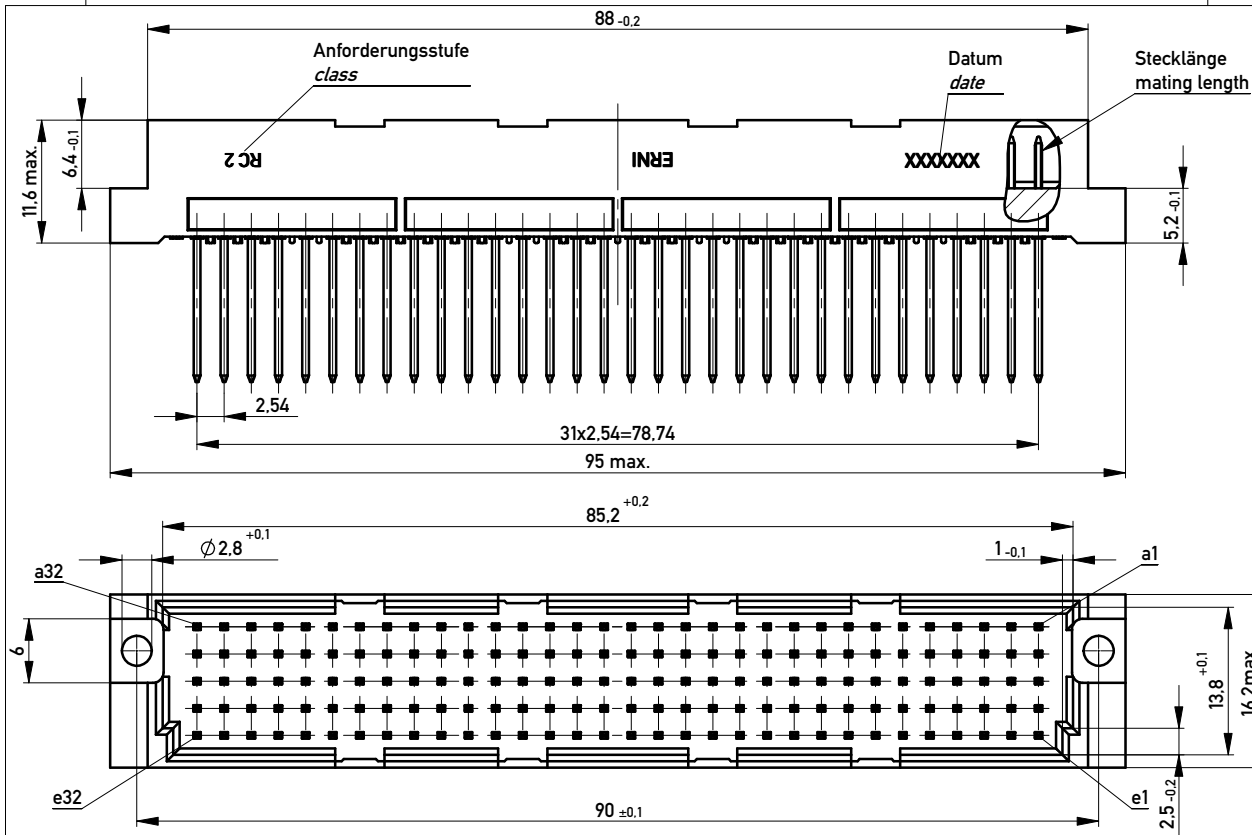

Stecklänge / mating length



E = early mate, late break / voreilend
S = standard
L = late mate, early break / nacheilend

Gerader Lötanschluß 0,6x0,6mm / Straight solder terminal 0,6x0,6mm
Isolierwerkstoff / housing material : PBT GF 30

Bauart 4 / type 4


Anforderungsstufe 2 = 400 Steckzyklen / performance class 2 = 400 mating cycles

Fehlende Maße und Angaben nach IEC 60 603-2 / DIN EN 60 603-2

Missing information and dimensions per IEC 60 603-2 / DIN EN 60 603-2

Bedruckung siehe Zeichnung 294905
Marking see drawing 294905

Leiterplatten-Lochbild / PCB drillhole pattern

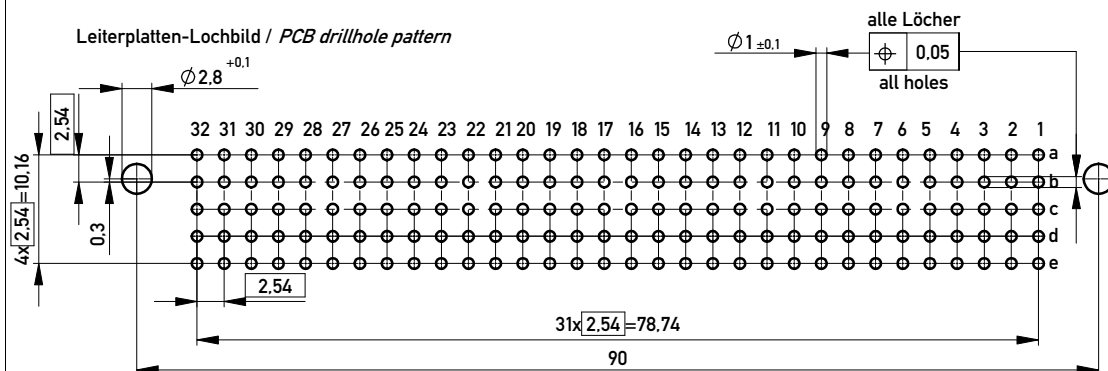

Copyright by ERNI GmbH
Proprietary notice pursuant to ISO 16018 to be observed.

Information:		Tolerances		Scale	2:1
All rights reserved. Only for Information. To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.		Subject to modification without prior notice. Drawing will not be updated.		Designation	
		www.ERNI.com		Messerleiste TE 160 Löt Male Con. TE 160 Solder	
				374470	
Index		Date		Class	
				STVTE	
				I A3	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[ERNI Electronics:](#)

[374470](#)