

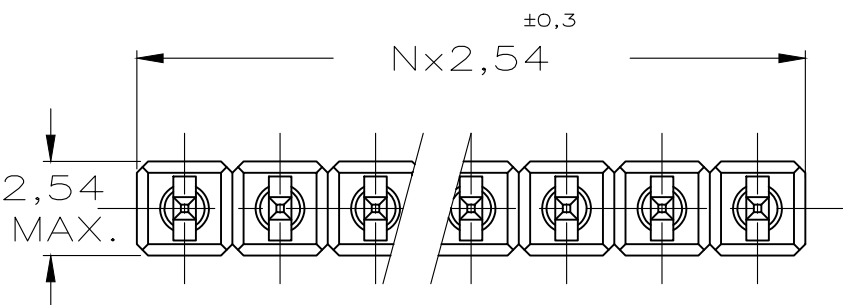


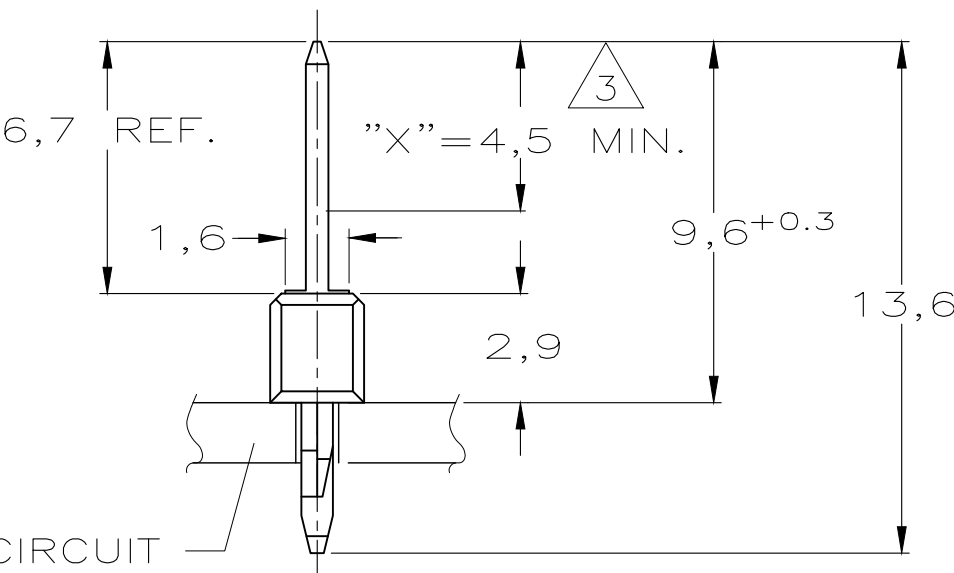

NOTES:

- 1 HOUSING—MATERIAL:20% GLASSFILLED POLYESTER (GREEN). CONTACT—MATERIAL:PHOSPHOR BRONZE.
- 2 ACTION—PIN SUITABLE FOR 1,6mm P.C.—BOARD—THICKNESS.
- 3 PLATING: AREA "X" Au—PLATED 0,76µm—THICKNESS. ACTION—PIN AREA: Sn—PLATED 1,27µm—THICKNESS. UNDER COATING:1,27µm Ni. ALL OVER.
- 4 TO DETERMINE DIMENSIONS TAKE N = Nr. OF POS. FOR EXAMPLE: 10 POS.=N x 2,54=25,40mm. FOR ORDER NR.:USE BASIC NR. + NR. OF POS. FOR EXAMPLE: 36 POS.= 3-215267-6-~~OBSOLETE~~6
- 5 MAX. PERMISSIBLE BURR AFTER CHOPPING 0,2mm.
- 6 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

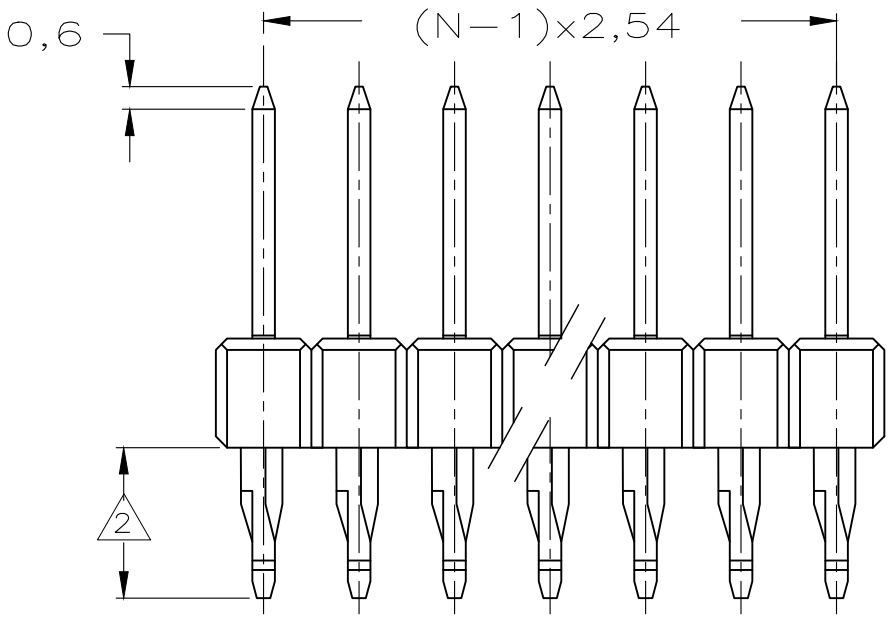

PRINTED CIRCUIT BOARD

P.C.B. HOLE DIM. ACTION PIN			
DRILLED HOLE	:1,15	±0,025	mm
FIN. HOLE	:0,94	to 1,09	mm
AFTER REFLOW	:0,91	to 1,09	mm
Cu—thks	:0,025	to 0,075	mm
Sn—thks	0,004	to 0,010	mm

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:
mm	±0,1
0 PLC	± -
1 PLC	± -
2 PLC	± -
3 PLC	± -
4 PLC	± -
ANGLES	± -
FINISH	-

MATERIAL

SEE NOTES

DWN J.v.LIEMPT 7 MAY 97

CHK R.BROENS

APVD E.LEIJTENS

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

CUSTOMER DRAWING

TE Connectivity

NAME

40 POS. MOD II PIN HEADER 2,54 PITCH WITH ACTION—PIN, SINGLE ROW

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A300779

C-215267

SCALE 5:1

SHEET 1 OF 1

REV B3

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[2-215267-8](#)