

LOC		DIST		REVISIONS					
FX		00		P	LTR	DESCRIPTION	DATE	DWN	APVD
				D		REVISED PER ECO-09-011983	19MAY2009	DLD	WTW


KEYING OPTIONS
SCALE 2:1




OPTION "A"




OPTION "B"

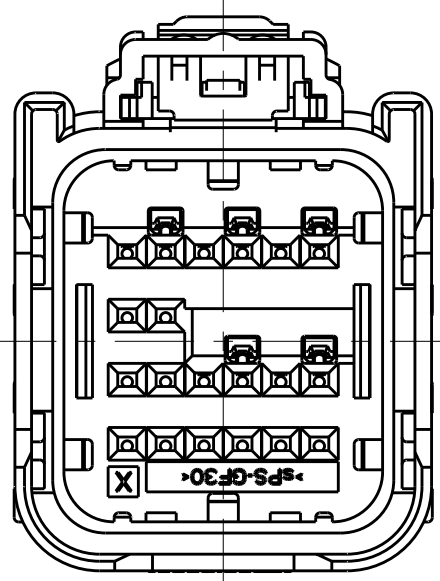


OPTION "C"

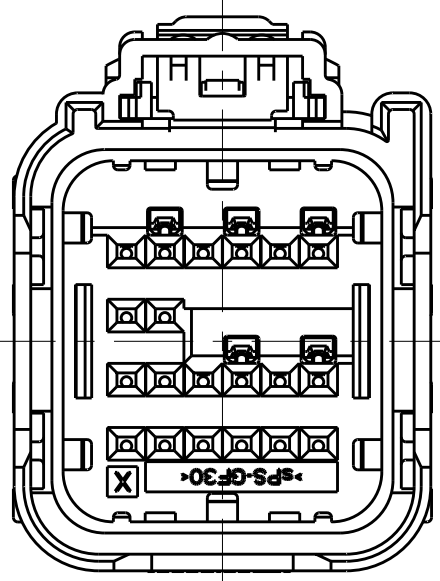

OPTION "D"

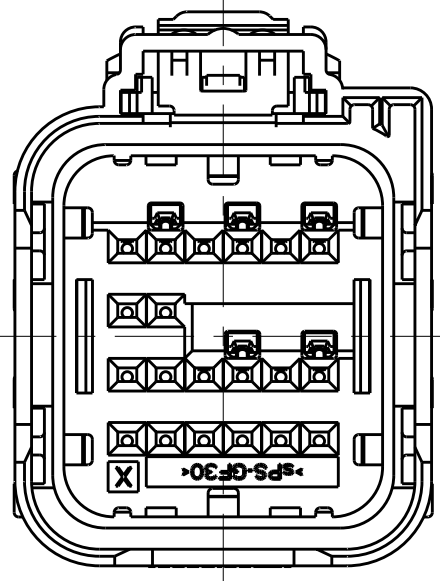

OPTION "E"

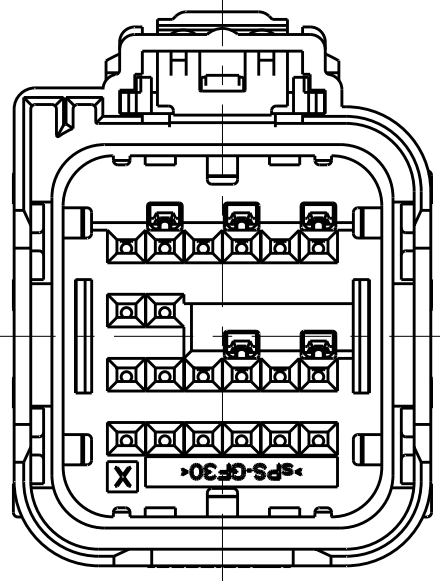



OPTION "F"




SECTION A-A
SHOWN WITH TPA IN
IT'S PRE-LOADED POSITION
(DELIVERY CONDITON)

MINIMUM FEED THROUGH CONDITION
WITH 1mm CLEARANCE ALL AROUND


MINIMUM FEED THROUGH CONDITION
WITH 1mm CLEARANCE ALL AROUND
SHOWN WITH OPTION WIRESHIELD

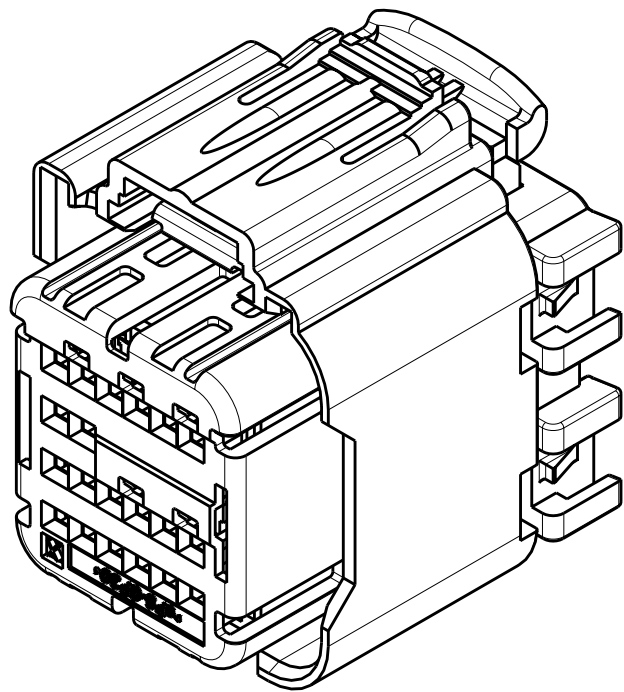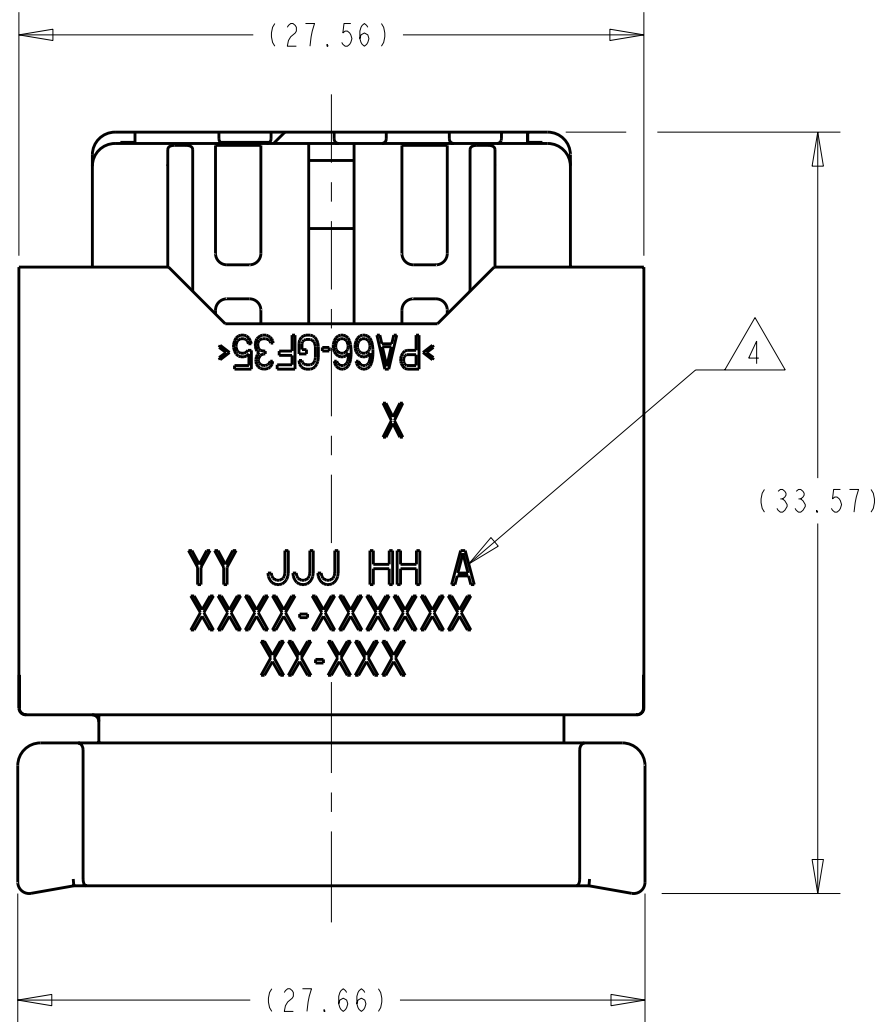

SCALE 2:1

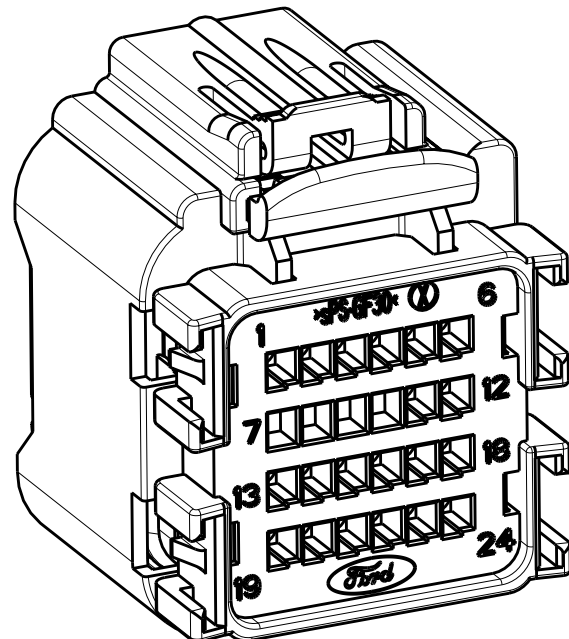

SCALE 2:1

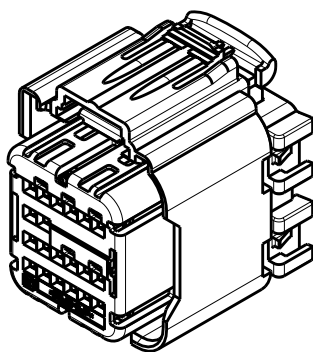

SCALE 1:1

KEYING OPTION "A" SHOWN

KEYING OPTION "A" SHOWN										SCALE 1:1			
ASSEMBLY PART NUMBER										7	CPA	PBT-GF15	RED
6										PERIMETER SEAL	SILICONE	GREEN	
5										GROMMET	SILICONE	BROWN	
4										SHORTING BAR	S.S.	SEE COMPONENT DRAWING	
3										COVER	PA66 35% GF	BLACK	
2										SPACER FOR SHORTING BAR APPLICATIONS	sPS 30% GF	NATURAL	
1										5 PLUG WITH KEYING OPTION "D" AND 5 SHORTING BAR POSITIONS CONFIGURATION	PA66 35% GF	BLACK	
1										5 PLUG WITH KEYING OPTION "C" AND 5 SHORTING BAR POSITIONS CONFIGURATION	PA66 35% GF	BLACK	
1										5 PLUG WITH KEYING OPTION "B" AND 5 SHORTING BAR POSITIONS CONFIGURATION	PA66 35% GF	BLACK	
1										5 PLUG WITH KEYING OPTION "A" AND 5 SHORTING BAR POSITIONS CONFIGURATION	PA66 35% GF	BLACK	
QUANTITY										ITEM	DESCRIPTION	MATERIAL	FINISH/COLOR

					7	8	9	10	11						17	18				23	Y	3-1924672-0	KEY B	
					7	8	9	10	11						17	18				23	Y	2-1924672-9	KEY A	
					7	8	9	10													Y	2-1924672-8	KEY B	
			5	6	7	8	9	10							17	18	19			23	24	Y	2-1924672-7	KEY A
			5	6	7	8	9	10							17	18	19	20		23	24	Y	2-1924672-6	KEY A
					7	8	9	10							17	18	20	21	22		Y		2-1924672-5	KEY A
					7	8	9	10						15		18	20			23	24	Y	2-1924672-4	KEY A
					7	8	9	10						15		18				23	24	Y	2-1924672-3	KEY A
				5	6	7	8	9	10		13	14			17	18	19			23	24	Y	2-1924672-2	KEY A
			5	6	7	8	9	10			13	14			17	18	19	20		23	24	Y	2-1924672-1	KEY A
			5	6	7	8	9	10			13	14	15		17	18		21		23	Y	2-1924672-0	KEY A	
					7	8	9	10					15	17	18					23	24	Y	1-1924672-9	KEY A
					7	8	9	10					15	17	18			21		23	24	Y	1-1924672-8	KEY A
					7	8	9	10							18	19	21			23	24	Y	1-1924672-7	KEY A
					7	8	9	10							18	19				23	24	Y	1-1924672-6	KEY A
					7	8	9	10					15		18	20	21			23	24	Y	1-1924672-5	KEY A
					7	8	9	10				15		17	18	20	21			23	24	Y	1-1924672-4	KEY A
					7	8	9	10				15		17	18	20	21	22		23	24	Y	1-1924672-3	KEY A
					7	8	9	10						17	18					23	Y		1-1924672-2	KEY A
					7	8	9	10						17	18	19	21			23	24	Y	1-1924672-1	KEY A
					7	8	9	10						17	18	19	20	21		23	24	Y	1-1924672-0	KEY A
					7	8	9	10					15	17	18	20				23	24	Y	1924672-9	KEY A
			5	6	7	8	9	10							18	20	21			23	24	Y	1924672-8	KEY A
					7	8	9	10						17	18	20	21			23	24	Y	1924672-7	KEY A
					7	8	9	10						17	18					23	24	Y	1924672-6	KEY A
					7	8	9	10						17	18	20	21	22		24	Y		1924672-5	KEY A
					7	8	9	10						17	18	19	20	21	22		24	Y	1924672-4	KEY A

[illegible]

BLANK CAVITIES INDICATE
OPEN TERMINAL HOLE POSITIONS

AMP 4805 REV 31MAR2000

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-1924670-6](#)