


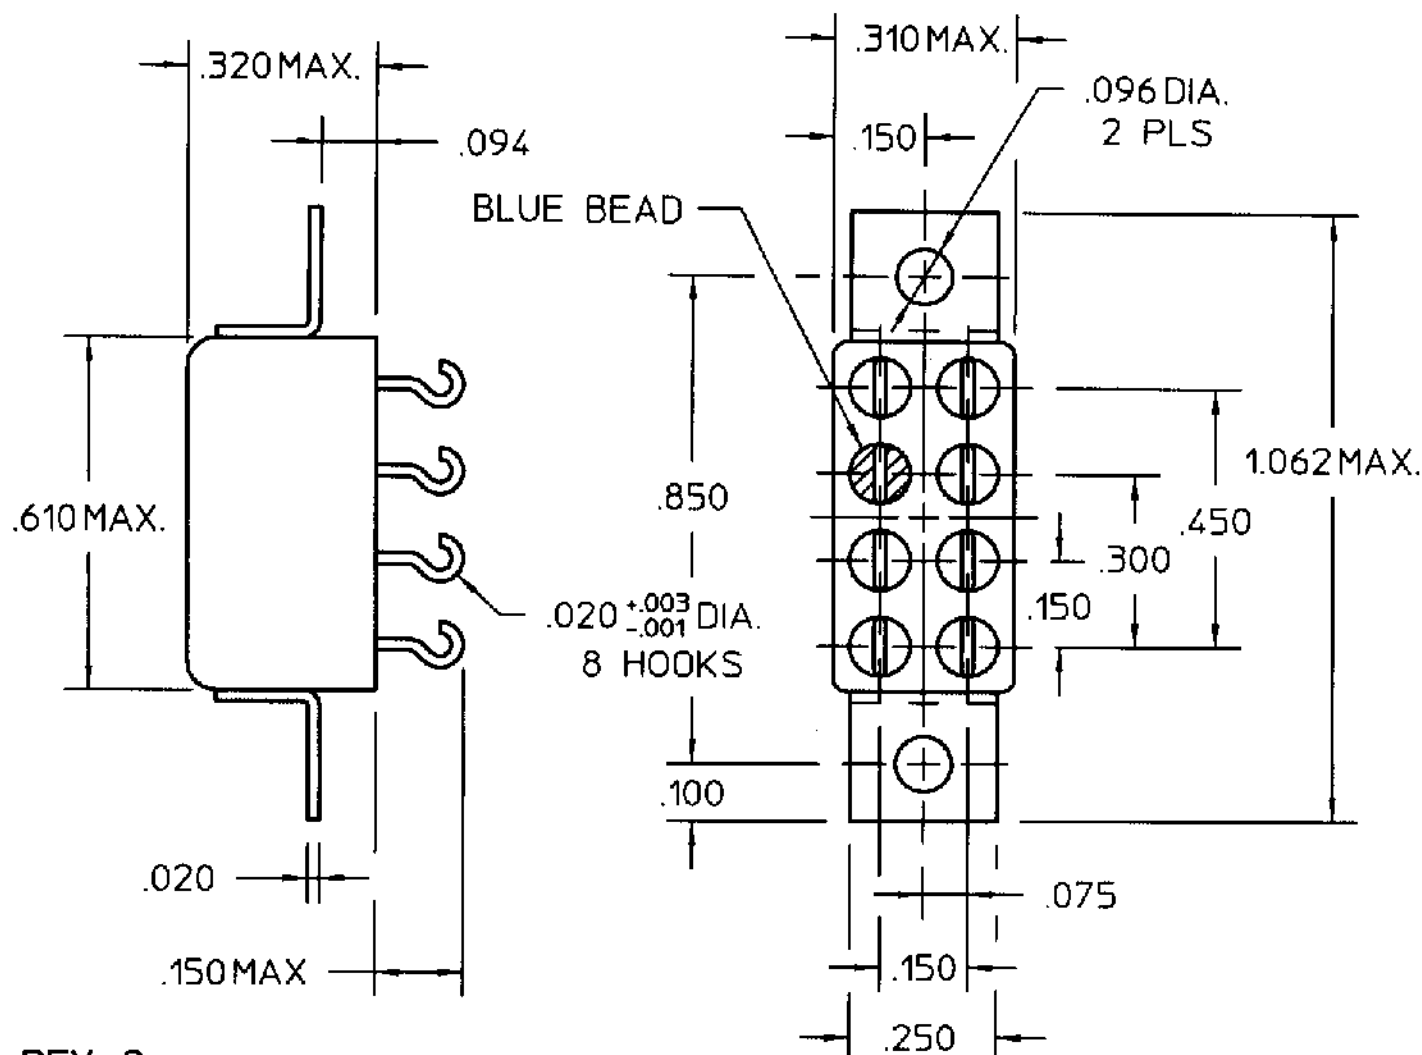

REV. 2

DCO 141326

TOL $\pm$.010 UNLESS OTHERWISE SPECIFIED

COIL: @ 25°C
 RESISTANCE _____ 210 OHMS $\pm$ 10%
 NOMINAL VOLTAGE _____ 12.0 VDC
 MUST OPERATE _____ 5.4 VDC


 MUST RELEASE _____ 3.2 VDC MAX, 0.6 VDC MIN.

ENVIRONMENT:

VIBRATION _____ 10 _____ CPS TO _____ 3000 _____ CPS @ _____ 30 _____ g's
 SHOCK _____ 75 _____ g's _____ 6 _____ MS. DURATION
 TEMPERATURE _____ -65 _____ °C TO _____ +125 _____ °C

NOTES: _____ OPERATE & RELEASE 4 MS MAX.
 _____ CONTACT STABILIZATION 2.5 MS MAX.

CUSTOMER DATA SHEET

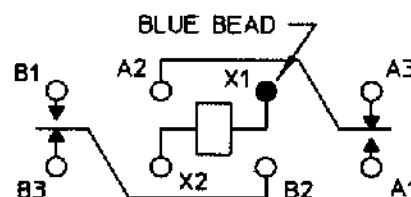

TERMINAL VIEW

CONTACT RATING: _____ LOW LEVEL TO
 _____ 2 AMPS 28 VDC RESISTIVE
 _____ 50,000 OPERATIONS

DR. _____ R.B. 1/21/97 _____ CK. GGH 9/20/99

COMMUNICATIONS
INSTRUMENTS, INC.

CUST. _____ QPL
 CUST. NO. _____ M39016/13-065M REV. _____

3SBC RELAY

3SBC1526A2

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[3SBC1526A2](#)