

CMKD2836
CMKD2838

SURFACE MOUNT
DUAL PAIR
HIGH SPEED SILICON
SWITCHING DIODES

ULTRAmini™



SOT-363 CASE



www.centralsemi.com

DESCRIPTION:

The CENTRAL SEMICONDUCTOR CMKD2836 and CMKD2838 types consist of four high speed switching diodes arranged in two electrically isolated configurations (Common Anode and Common Cathode). These devices are manufactured by the epitaxial planar process, in an epoxy molded ULTRAmini™ surface mount package, designed for high speed switching applications.

The following configurations are available:

CMKD2836 DUAL PAIR, COMMON ANODE **MARKING CODE: K36**
CMKD2838 DUAL PAIR, COMMON CATHODE **MARKING CODE: K38**

MAXIMUM RATINGS: (TA=25°C)

	SYMBOL		UNITS
Peak Repetitive Reverse Voltage	V _{RRM}	75	V
Average Forward Current	I _O	200	mA
Peak Forward Current	I _{FM}	300	mA
Power Dissipation	P _D	350	mW
Operating and Storage Junction Temperature	T _J , T _{stg}	-65 to +150	°C
Thermal Resistance	Θ _{JA}	357	°C/W

ELECTRICAL CHARACTERISTICS PER DIODE: (TA=25°C unless otherwise noted)


SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNITS
I _R	V _R =50V			100	nA
BV _R	I _R =100µA	75			V
V _F	I _F =10mA			1.0	V
V _F	I _F =50mA			1.0	V
V _F	I _F =100mA			1.2	V
C _T	V _R =0, f=1.0MHz		1.5	4.0	pF
t _{rr}	I _R =I _F =10mA, R _L =100Ω, Rec. to 1.0mA			4.0	ns

CMKD2836
CMKD2838


SURFACE MOUNT
DUAL PAIR
HIGH SPEED SILICON
SWITCHING DIODES

Central
Semiconductor Corp.™

SOT-363 CASE - MECHANICAL OUTLINE

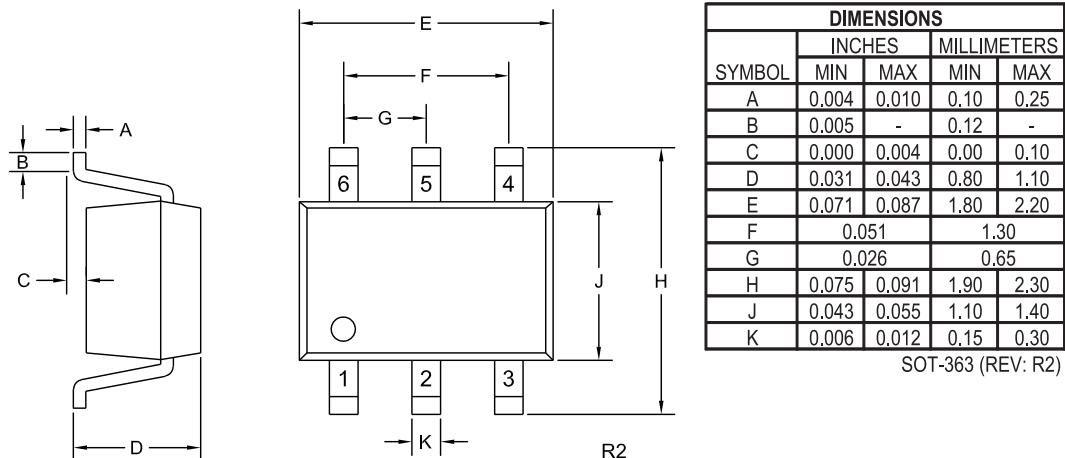

PIN CONFIGURATIONS

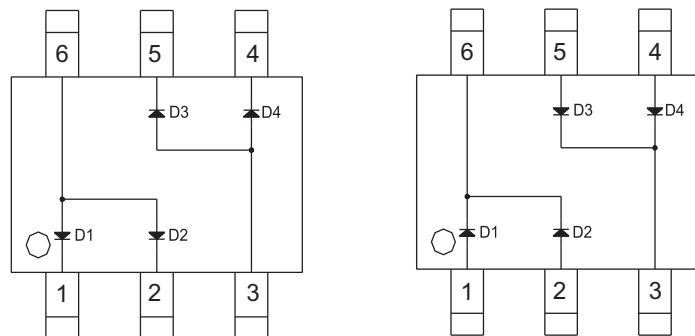

CMKD2836

LEAD CODE:
 1) Cathode D1
 2) Cathode D2
 3) Anode D3, D4
 4) Cathode D4
 5) Cathode D3
 6) Anode D1, D2

MARKING CODE: K36

CMKD2838

LEAD CODE:
 1) Anode D1
 2) Anode D2
 3) Cathode D3, D4
 4) Anode D4
 5) Anode D3
 6) Cathode D1, D2

MARKING CODE: K38

R4 (13-January 2010)

OUTSTANDING SUPPORT AND SUPERIOR SERVICES



PRODUCT SUPPORT

Central's operations team provides the highest level of support to insure product is delivered on-time.

- Supply management (Customer portals)
- Inventory bonding
- Consolidated shipping options
- Custom bar coding for shipments
- Custom product packing

DESIGNER SUPPORT/SERVICES

Central's applications engineering team is ready to discuss your design challenges. Just ask.

- Free quick ship samples (2nd day air)
- Online technical data and parametric search
- SPICE models
- Custom electrical curves
- Environmental regulation compliance
- Customer specific screening
- Up-screening capabilities
- Special wafer diffusions
- PbSn plating options
- Package details
- Application notes
- Application and design sample kits
- Custom product and package development

REQUESTING PRODUCT PLATING

1. If requesting Tin/Lead plated devices, add the suffix " TIN/LEAD" to the part number when ordering (example: 2N2222A TIN/LEAD).
2. If requesting Lead (Pb) Free plated devices, add the suffix " PBFREE" to the part number when ordering (example: 2N2222A PBFREE).

CONTACT US

Corporate Headquarters & Customer Support Team

Central Semiconductor Corp.

145 Adams Avenue

Hauppauge, NY 11788 USA

Main Tel: (631) 435-1110

Main Fax: (631) 435-1824

Support Team Fax: (631) 435-3388

www.centralsemi.com

Worldwide Field Representatives:

www.centralsemi.com/wwreps

Worldwide Distributors:

www.centralsemi.com/wwdistributors

For the latest version of Central Semiconductor's **LIMITATIONS AND DAMAGES DISCLAIMER**, which is part of Central's Standard Terms and Conditions of sale, visit: www.centralsemi.com/terms

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Central Semiconductor:](#)

[CMKD2836](#) [CMKD2838](#) [CMKD6263DO](#) [CMKD6263](#)