


LOC	DIST	REVISIONS 変更				DATE	DWN	APVD
J		P	LTR	DESCRIPTION				
			H3	REVISED PER ECO-13-012188		05AGU13	B.P	D.Z

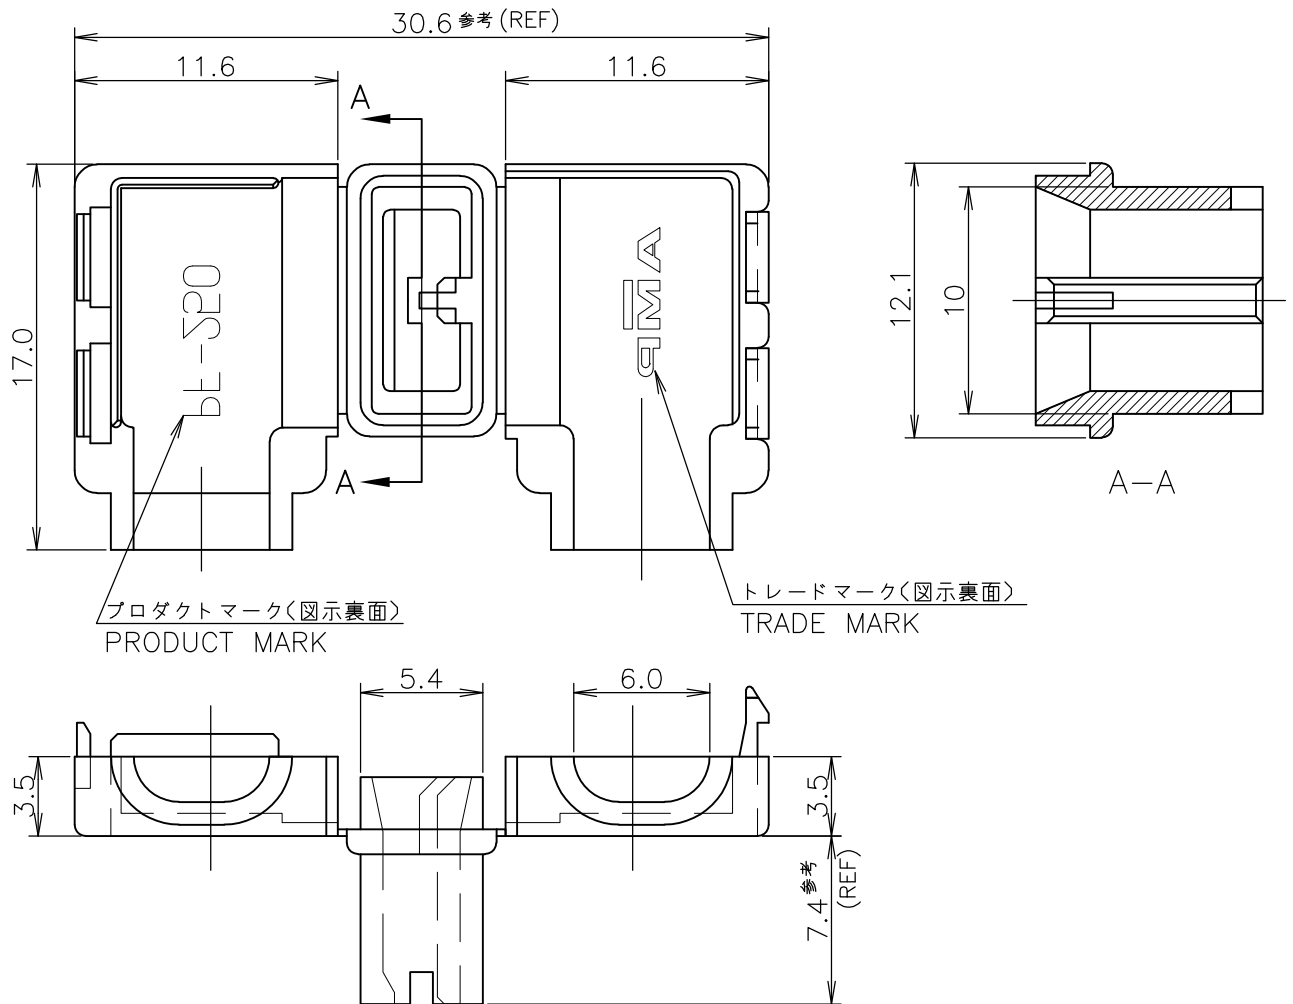

1 APPLICABLE CONTACT P/N: 175057-1

△ OBSOLETE PARTS: OBSOLETE CIS STERAMLINING PER D.RENAUD/D.SINSI

1 適用端子型番: 175057-1

GWT,94V-0	自然色 (NATURAL)	7-176497-1
94V-0	黒 (BLACK)	1-176497-9
94V-0	赤 (RED)	1-176497-7
94V-0	青 (BLUE)	1-176497-6
94V-0	黄 (YELLOW)	1-176497-4
94V-0	自然色 (NATURAL)	1-176497-1
94V-2	黒 (BLACK)	176497-9
94V-2	自然色 (NATURAL)	176497-1
UL GRADE	色 (COLOR)	型番 (P/N)

GENERAL TOLERANCE
一般公差

10 $\geq$: ± 0.2
30 $\geq$ > 10: ± 0.25
100 $\geq$ > 30: ± 0.3
ANGLES: $\pm 3^\circ$

WIRE RANGE 抱合電線断面積	INSULATION DIA 被覆外径
mm ²	2.8~4.2 mm ϕ

MATERIAL 材料	6/6 ナイロン (表参照) 6/6 NYLON (SEE TABLE)	FINISH 仕上
----------------	---	--------------



TE Connectivity

NAME 名称	ワンタッチスリーブ (250シリーズ旗型ポジティブロック-EX用) ONE TOUCH SLEEVE 250 SERIES FLAG POSITIVE LOCK-EX
------------	---

SIZE	CAGE CODE	DRAWING NO 番号	RESTRICTED TO
A4	00779	C-176497	

CUSTOMER DRAWING

SCALE 尺度	NTS	SHEET	1 OF 1	REV	H3
-------------	-----	-------	--------	-----	----

RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED.


By -

© COPYRIGHT

DIMENSIONS:
単位: 耗
mm

TOLERANCES UNLESS
OTHERWISE SPECIFIED:
一般公差

0 PLC	$\pm$ -
1 PLC	$\pm$ -
2 PLC	$\pm$ -
3 PLC	$\pm$ -
4 PLC	$\pm$ -
ANGLES	$\pm$ -



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-176497-7](#)