

Coupling - VS-MP-PPC/CG-PO/FO - 1404321

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Multi-port power and data connection: push/pull power and SC-RJ, for passive PROFINET cabling to robots, including mounting foot.

Product Description

Push/pull power and data coupling; version 14



Key Commercial Data

Packing unit	1 pc
Custom tariff number	85366990
Country of origin	Germany

Technical data

Mechanical characteristics

Connection profile	Data/power: SCRJ/5-pos.
Insertion/withdrawal cycles	≥ 500 (Data)
	≤ 100 (Power)
Max. cable diameter	5 mm ... 8 mm (Data cable gland)

Ambient conditions

Ambient temperature (operation)	-40 °C ... 70 °C
---------------------------------	------------------

Material data

Housing material	Aluminum press-drawn section / die-cast zinc
------------------	--

Electrical characteristics

Nominal voltage U_N	24 V
Nominal current I_N	16 A

Coupling - VS-MP-PPC/CG-PO/FO - 1404321

Classifications

eCl@ss

eCl@ss 4.0	272607xx
eCl@ss 4.1	27260701
eCl@ss 5.0	27260701
eCl@ss 5.1	27061801
eCl@ss 6.0	27061801
eCl@ss 7.0	27061801
eCl@ss 8.0	19179290
eCl@ss 9.0	19179290

ETIM

ETIM 3.0	EC000830
ETIM 4.0	EC001134
ETIM 5.0	EC001134

UNSPSC

UNSPSC 6.01	26121616
UNSPSC 7.0901	26121616
UNSPSC 11	26121604
UNSPSC 12.01	31261501
UNSPSC 13.2	26121616

Approvals

Approvals

Approvals

EAC / EAC

Ex Approvals

Approvals submitted

Approval details

EAC


Coupling - VS-MP-PPC/CG-PO/FO - 1404321

Approvals


EAC

Drawings

Drilling diagram



Dimensional drawing

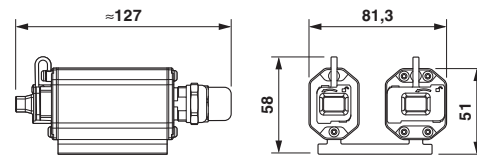

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Phoenix Contact:](#)

[1404321](#)