

Rubber stem helps to achieve travel of 0.3 to 0.55mm & over travel



■ Typical Specifications

Items	Specifications
Rating (max.)	50mA 12V DC
Rating (min.)	10μA 1V DC
Initial contact resistance	100mΩ max.
Protective structure ※	IP67 equivalent (Except SKRAAW)

■ Product Line

Product No.	Operating force	Operating direction	Travel (mm)	Operating life (5mA 5V DC)	Stem color	Minimum order unit (pcs.)	
						Japan	Export
SKRAAWE010	0.6N	Top push	0.3	4,000,000 cycles 100,000 cycles	Blue	3,000	3,000
SKRAAKE010	2.45N				White		
SKRAALE010	3.92N		0.35				
SKRAAME010	1.96N		0.5				
SKRAAQE010	3.43N		0.55		Blue	1,400	1,400


■ Packing Specifications

Taping

Series	Number of packages (pcs.)			Real width W (mm)	Tape width (mm)	Export package measurements (mm)
	1 reel	1 case /Japan	1 case /export packing			
SKRAAK	3,000	30,000	30,000	13.5	12	395×395×205
SKRAAL SKRAAW	1,400	11,200	11,200	17.5	16	

Note


For reels of 330mm diameter, please inquire.

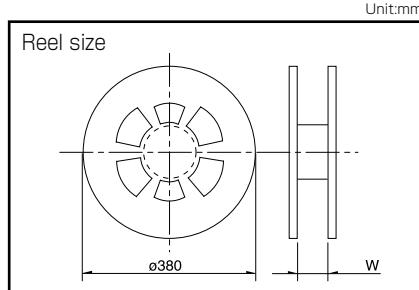

■ Dimensions

Style	PC board land dimensions (Viewed from switch mounting face)												
<table border="1"> <tr> <th></th> <th>h</th> <th>A</th> </tr> <tr> <td>SKRAAW</td> <td>3.4</td> <td>2.0</td> </tr> <tr> <td>SKRAAK · SKRAAL</td> <td>3.4</td> <td>2.9</td> </tr> <tr> <td>SKRAAM · SKRAAO</td> <td>5.1</td> <td>2.5</td> </tr> </table>		h	A	SKRAAW	3.4	2.0	SKRAAK · SKRAAL	3.4	2.9	SKRAAM · SKRAAO	5.1	2.5	
	h	A											
SKRAAW	3.4	2.0											
SKRAAK · SKRAAL	3.4	2.9											
SKRAAM · SKRAAO	5.1	2.5											


■ Circuit Diagram

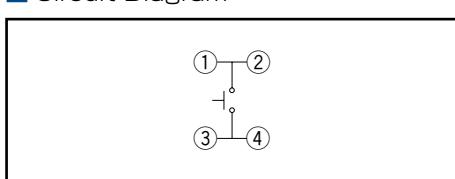

※ Assumes the switch is left alone without being operated. Under the specified conditions, dust and water ingress with a significant impact on the switch's on-off function is prevented.

IP67 dust and water resistance is guaranteed for the switch alone and performance may not be guaranteed depending on the mounting conditions and usage.

Refer to P.249 for soldering conditions.

Type		Sharp Feeling Type														
		Surface Mount														
Series		SKST	SKRA	SKHM	SKHU	SKTD	SKSN	SKTG	SKSL							
Photo																
Features		Middle travel		—	—	Low-profile	Mid-mount	Half-mount								
Water-proof		—	○	—	○	●	—	●	—							
Dust-proof		—	○	—	○	●	—	●	—							
IP standard		—	67 equivalent	—	—	67 equivalent	—	67 equivalent	—							
Operating direction	Top push	●	●	●	●	—	—	—	—							
	Side push	—	—	—	—	●	●	●	●							
Dimensions (mm)	W	□8.5	□6.2	6.2	6.2	3.9	6.2	5.2	4.5							
	D			6.5	6.3	2.9	3	3.5	2.6							
	H	3.95	3.5/5.2	3.1	2.5/3.1	1.55	3.5	1.55	2.2							
Operation force coverage	1N max.	4N to 10N														
	1N to 2N															
	2N to 3N															
	3N to 4N															
	4N to 5N															
Travel (mm)		0.9	See the relevant pages for respective product description		0.25	0.15	0.2	0.15								
Ground terminal		—	—		●	●	●	●	●							
Operating temperature range		−40°C to +90°C		−40°C to +85°C		−30°C to +85°C	−40°C to +85°C	−30°C to +85°C								
Automotive use		●	○	—	○	—	—	—	—							
Life Cycle																
Electrical performance	Rating (max.) (Resistive load)	50mA 16V DC	50mA 12V DC													
	Rating (min.) (Resistive load)	10μA 1V DC														
	Insulation resistance	100MΩ min. 100V DC 1min.														
	Voltage proof	250V AC 1min.			100V AC 1min.	250V AC 1min.	100V AC 1min.									
Durability	Vibration	10 to 55 to 10Hz/min., the amplitude is 1.5mm for all the frequencies, in the 3 direction of X, Y and Z for 2 hours respectively														
	Lifetime	Shall be in accordance with individual specifications.														
Environmental performance	Cold	−40°C 1,000h		−40°C 96h												
	Dry heat	90°C 1,000h		90°C 96h		85°C 96h	90°C 96h	85°C 96h	90°C 96h							
	Damp heat	60°C, 90 to 95%RH 1,000h		60°C, 90 to 95%RH 96h												
Page		230	231	232	233	235	236	237	238							

W : Width. The most outer dimension excluding terminal portion.
D : Depth. The most outer dimension excluding terminal portion.
H : Height. The minimum dimension if there are variances.

TACT Switch™ Soldering Conditions	249
TACT Switch™ Cautions	250


Notes

1. The automotive operating temperature range to be individually discussed upon request.
2. ● Indicates applicability to all products in the series, while ○ indicates applicability to some products in the series.

Condition for Reflow

Available for Surface Mount Type.

Temperature profile

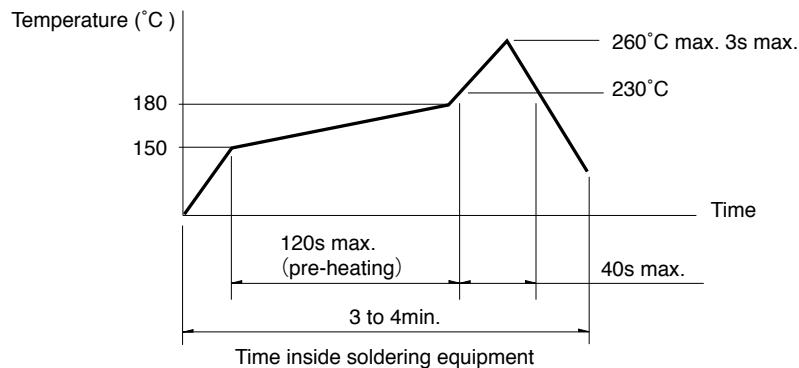

Notes

1. Please confirm the specifications of our product for the detailed condition.
2. Soldering conditions differ depending on reflow soldering machines.

Prior verification of soldering condition is highly recommended.

Conditions for Auto-dip

Available for Snap-in Type and Radial Type.

Items	Condition
Flux built-up	Mounting surface should not be exposed to flux
Preheating temperature	Ambient temperature of the soldered surface of PC board. 100°C max.
Preheating time	60s max.
Soldering temperature	260°C max.
Duration of immersion	5s max.
Number of soldering	2times max.

SKHH Series

Items	Condition
Flux built-up	Mounting surface should not be exposed to flux
Preheating temperature	Ambient temperature of the soldered surface of PC board. 110°C max.
Preheating time	60s max.
Soldering temperature	260°C max.
Duration of immersion	5s max.
Number of soldering	2times max.

SKHL Top Push Type, SKQJ Series

Items	Condition
Flux built-up	Mounting surface should not be exposed to flux
Preheating temperature	Ambient temperature of the soldered surface of PC board. 100°C max.
Preheating time	45s max.
Soldering temperature	255°C max.
Duration of immersion	5s max.
Number of soldering	2times max.

Notes

1. Prevent flux penetration from the top side of the TACT Switch™.
2. Switch terminals and a PC board should not be coated with flux prior to soldering.
3. The second soldering should be done after the switch is stable with normal temperature.
4. Use the flux with a specific gravity of min 0.81.

(EC-19S-8 by TAMURA CORPORATION, or equivalents.)

Manual Soldering

Items	Condition
Soldering temperature	350°C max.
Duration of soldering	3s max.
Capacity of soldering iron	60W max.

SKHH, SKHW Series

Items	Condition
Soldering temperature	360°C max.
Duration of soldering	3s max.
Capacity of soldering iron	60W max.

SKTD, SKTG, SKQJ Series

Items	Condition
Soldering temperature	350°C max.
Duration of soldering	3s max.
Capacity of soldering iron	20W max.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

ALPS:

[SKRAAWE010](#) [SKRAALE010](#) [SKRAAQE010](#) [SKRAAKE010](#) [SKRAAME010](#)