


LOC	DIST	REVISIONS 変更					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
J			C	REVISED&REDRAWN FJ00-2475-02	02DEC'02	S.A	Y.Y
			C1	REVISED PER ECO-09-024717	04NOV09	KK	AEG

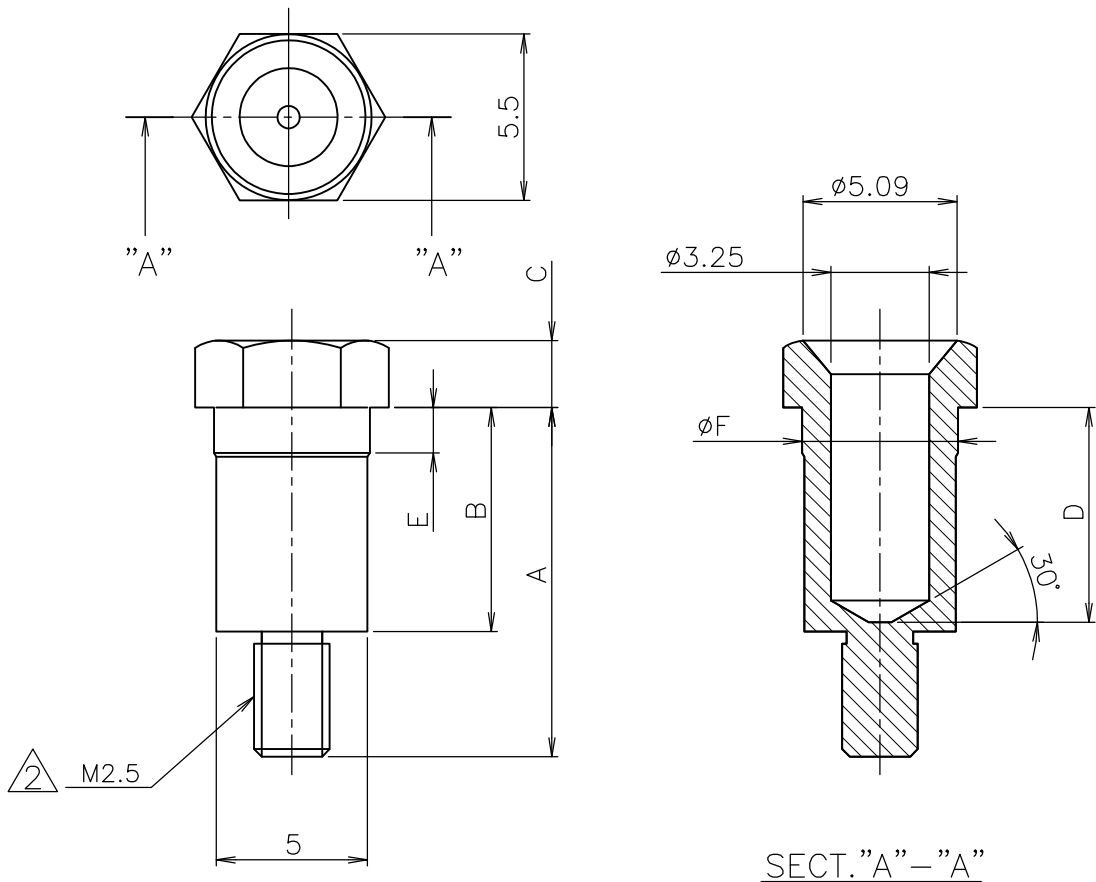

注記

- 材料及び仕上：黄銅、ニッケルメッキ
- ねじ部先端を除き、ゆるみ止め材料塗布

NOTE (ロックタイト DRI-LDC 202, 203 相当)

- MATERIAL AND FINISH : BRASS, Ni PLATE
- THREAD LOCKING MATERIAL APPLIED EXCEPT FOR THREAD TIP AREA. (EQUIVALENT LOCTITE DRI-COC 202, 203)
- OBSELETE PARTS: OBSELETE CIS STREAMLINING PER D.RENAUD/D.SINISI

			7.1	2.22	7.4	11.54	5-177728-1 ³
MAKE FROM -2	5.15	1.5	6.3	3.02	6.6	10.74	2-177728-2 ³
	5.15	1.5	6.3	3.02	6.6	10.74	177728-2
	5.15	1.5	7.1	2.22	7.4	11.54	177728-1
REMARKS	F	E	D	C	B	A	P/N

DIMENSIONS: 単位： 耗 MM	DWN S.ABE	29NOV2002	MATERIAL 材料	SEE NOTE	FINISH 仕上	SEE NOTE
	CHK Y.YAMAMOTO	02DEC2002	Tyco Electronics AMP K.K. Kawasaki, Japan			
TOLERANCES UNLESS OTHERWISE SPECIFIED: 一般公差	APVD Y.YAMAMOTO	02DEC2002				
0 PLC ± 0.25	PRODUCT SPEC 製品規格		NAME 名称			
1 PLC ± 0.25	APPLICATION SPEC 取付適用規格		GUIDE SOCKET FOR AMP DOCKING CONNECTOR			
2 PLC ± 0.25			SIZE	CAGE CODE	DRAWING NO 番号	RESTRICTED TO
3 PLC ±			A4	00779	C-177728	—
4 PLC ±						
ANGLES ± 3°						
	WEIGHT					
CUSTOMER DRAWING			SCALE 尺度	4:1	SHEET 1 OF 1	REV C1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[177728-1](#)