

THIS DRAWING IS UNPUBLISHED.	RELEASED FOR PUBLICATION - , - .
© COPYRIGHT - By -	ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION		DATE	APVD
—	—		D9	REVISED PER ECO-12-012202		03JUL12	MS

PHYSICAL PROPERTIES:
HOUSING MATERIAL: PBT
FLAMMABILITY: UL94V-0
COLOR: BLACK

TERMINAL:
TERMINALS: BRASS, TIN PLATED
SCREWS: 6-32, STEEL, NICKEL PLATED

MECHANICAL:
PITCH (TERMINAL SPACING): 9.50mm (.374")
WIRE RANGE: 12-22 AWG
RECOMMENDED TIGHTENING TORQUE: 12IN-LBS MAX.

ELECTRICAL PROPERTIES:
MAXIMUM CURRENT: 20A
OPERATING VOLTAGE: 300V

ENVIRONMENTAL PROPERTIES:
OPERATING TEMP RANGE: -40°C TO 120°C

- 1

SCREWS ON ONE SIDE IN WIRE READY POSITION.
- 2

SEE FIGURE.
- 3



WHITE INK STAMP.
- 4

NICKEL PLATED BRASS SCREWS.
- 5


PRELIMINARY PART NUMBER.
- 6

TE CONNECTIVITY LOGO LOCATED APPROXIMATE AREA SHOWN.


<div>52</div>	104.7	112.2	—	—	10	4-1546307-7
<div>52</div>	104.7	112.2	—	—	10	4-1546307-6
<div>54</div>	104.7	112.2	—	—	10	4-1546307-5
<div>521</div>	104.7	112.2	—	—	10	3-1546307-3
	104.7	112.2	—	—	10	1-1546307-0
<div>5321</div>	95.2	102.7	—	9	9	5-1546307-0
<div>5321</div>	95.2	102.7	4	9	9	4-1546307-9
<div>321</div>	95.2	102.7	4	9	9	4-1546307-8
	95.2	102.7	—	—	9	1546307-9
	85.7	93.2	—	—	8	1546307-8
	76.2	83.7	—	—	7	1546307-7
<div>54</div>	66.7	74.2	—	—	6	4-1546307-4
	66.7	74.2	—	—	6	1546307-6
<div>52</div>	57.2	64.7	—	—	5	4-1546307-3
<div>52</div>	57.2	64.7	—	—	5	4-1546307-2
<div>52</div>	57.2	64.7	—	—	5	4-1546307-1
<div>52</div>	57.2	64.7	—	—	5	4-1546307-0
<div>54</div>	57.2	64.7	—	—	5	3-1546307-9
	57.2	64.7	—	—	5	1546307-5
<div>521</div>	47.7	55.2	—	—	4	3-1546307-2
	47.7	55.2	—	—	4	1546307-4
<div>52</div>	38.2	45.7	—	—	3	3-1546307-8
<div>52</div>	38.2	45.7	—	—	3	3-1546307-7
<div>52</div>	38.2	45.7	—	—	3	3-1546307-6
<div>52</div>	38.2	45.7	—	—	3	3-1546307-5
<div>54</div>	38.2	45.7	—	—	3	3-1546307-4
	38.2	45.7	—	—	3	1546307-3
	28.7	36.2	—	—	2	1546307-2
	DIM B	DIM A	QC TAB .187 45° ②	QC TAB .187 FLAT ①	NO OF POSN	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S SCHLEGEL 20AUG2002		<div>STE</div> TE Connectivity							
DIMENSIONS: mm		CHK C RICHARD 8/20/02		NAME 9.50MM (.374) DBL ROW BARRIER STRIP W/ WASHER							
		APVD C RICHARD 8/20/02									
		PRODUCT SPEC —									
		APPLICATION SPEC —		SIZE		CAGE CODE	DRAWING NO		RESTRICTED TO		
		WEIGHT —		A3		00779		C-1546307		—	
		CUSTOMER DRAWING		SCALE		1:1		SHEET		1 OF 3	
MATERIAL —		FINISH —									



LOC —	DIST —	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
			—	SEE SHEET 1	—	—	—






3-1546307-1




3-1546307-2




3-1546307-3

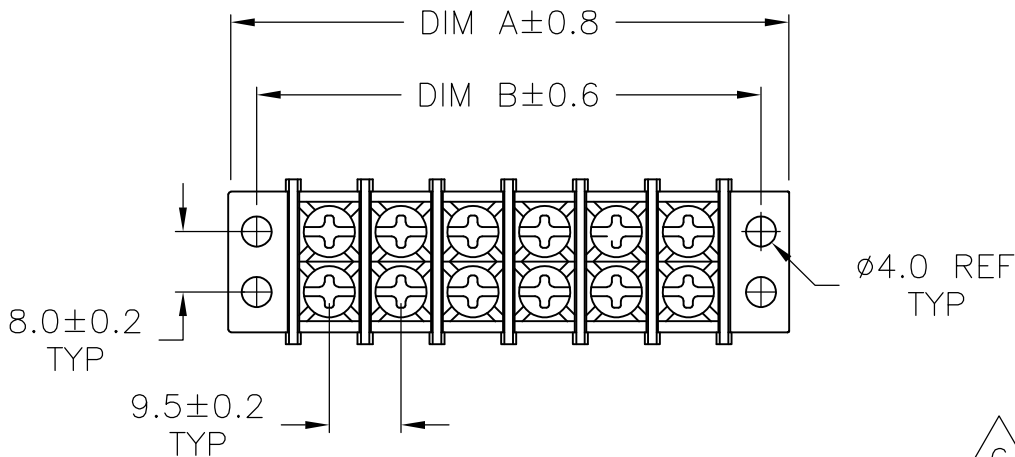



3-1546307-7




3-1546307-8




3-1546307-6



3-1546307-5



294.7	302.2	—	—	30	3-1546307-0
285.2	292.7	—	—	29	2-1546307-9
275.7	283.2	—	—	28	2-1546307-8
266.2	273.7	—	—	27	2-1546307-7
256.7	264.2	—	—	26	2-1546307-6
247.2	254.7	—	—	25	2-1546307-5
237.7	245.2	—	—	24	2-1546307-4
228.2	235.7	—	—	23	2-1546307-3
218.7	226.2	—	—	22	2-1546307-2
209.2	216.7	—	—	21	2-1546307-1
199.7	207.2	—	—	20	3-1546307-1
199.7	207.2	—	—	20	2-1546307-0
190.2	197.7	—	—	19	1-1546307-9
180.7	188.2	—	—	18	1-1546307-8
171.2	178.7	—	—	17	1-1546307-7
161.7	169.2	—	—	16	1-1546307-6
152.2	159.7	—	—	15	1-1546307-5
142.7	150.2	—	—	14	1-1546307-4
133.2	140.7	—	—	13	1-1546307-3
123.7	131.2	—	—	12	1-1546307-2
114.2	121.7	—	—	11	1-1546307-1
DIM B	DIM A	QC TAB .187 45° ②	QC TAB .187 FLAT ①	NO OF POSN	PART NUMBER

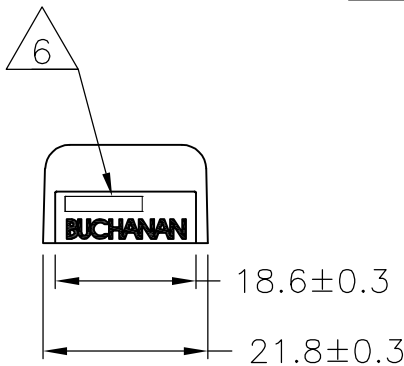

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm

MATERIAL
—

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ± —
1 PLC ± 0.3
2 PLC ± 0.25
3 PLC ± —
4 PLC ± —
ANGLES ± 2°
FINISH —

DWN S SCHLEGEL 20AUG2002
CHK C RICHARD 8/20/02
APVD C RICHARD 8/20/02
PRODUCT SPEC
APPLICATION SPEC
WEIGHT —

TE Connectivity

9.50MM (.374) DBL ROW BARRIER STRIP
W/ WASHER

SIZE A3
CAGE CODE 00779
DRAWING NO C-1546307

RESTRICTED TO —

CUSTOMER DRAWING

SCALE 1:1

SHEET 2 OF 3

REV D9

4

3

2

1


THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION


© COPYRIGHT - By -

ALL RIGHTS RESERVED.


LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN
-	-	-	-	SEE SHEET 1	-	-

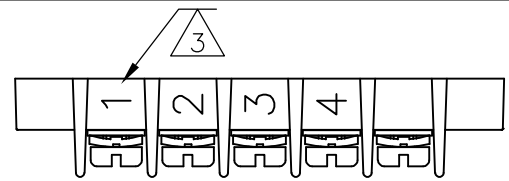


4-1546307-2

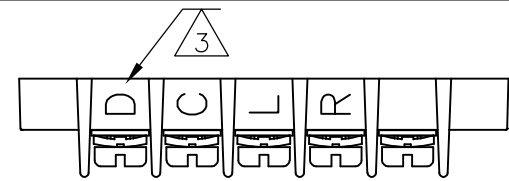


4-1546307-3

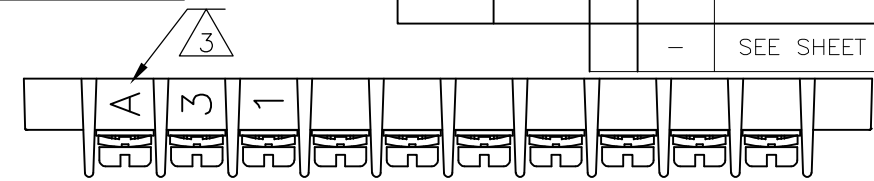


4-1546307-7

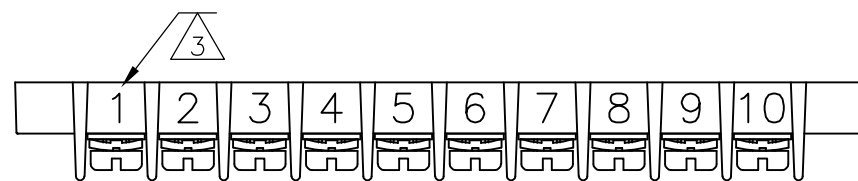




4-1546307-6

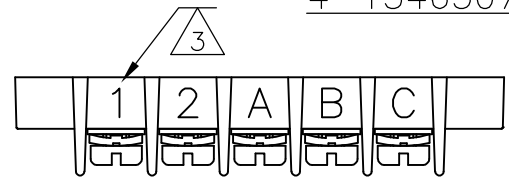

4-1546307-0


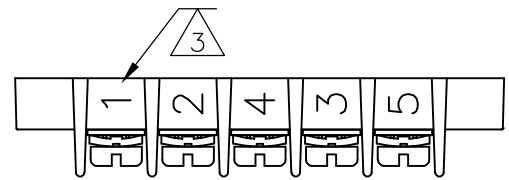


4-1546307-1

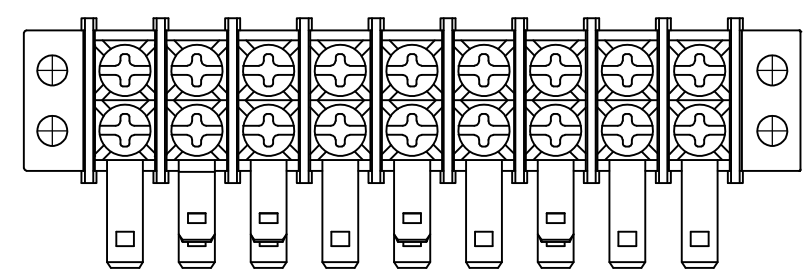


4-1546307-8




MARK BOTH SIDES

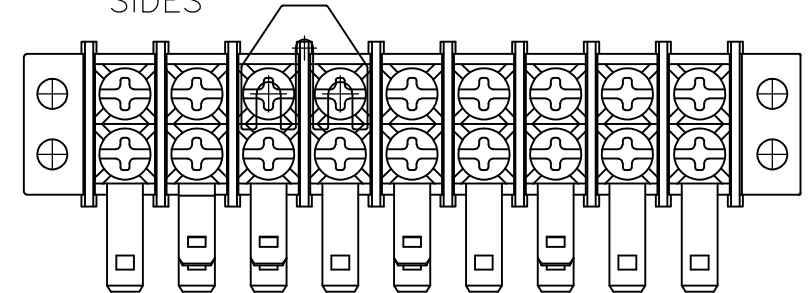


4-1546307-9

MARK BOTH SIDES


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S SCHLEGEL 20AUG2002	 TE Connectivity			
DIMENSIONS: mm		CHK C RICHARD 8/20/02				
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD C RICHARD 8/20/02	NAME 9.50MM (.374) DBL ROW BARRIER STRIP W/ WASHER			
0 PLC ± - 1 PLC ± 0.3 2 PLC ± 0.25 3 PLC ± - 4 PLC ± - ANGLES ± 2°		PRODUCT SPEC	SIZE A3			
MATERIAL		APPLICATION SPEC	CAGE CODE 00779			
FINISH		WEIGHT	DRAWING NO C-1546307			
-		-	RESTRICTED TO			
-		CUSTOMER DRAWING	SCALE 1:1			
			SHEET 3 OF 3			
			REV D9			

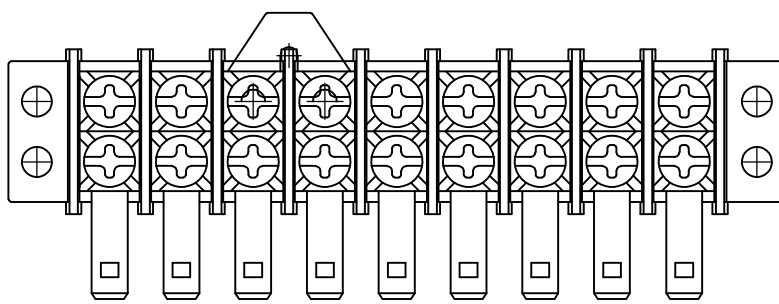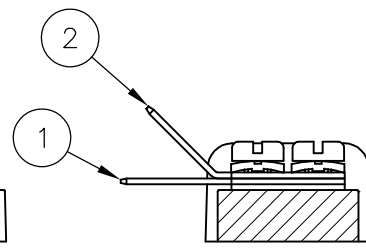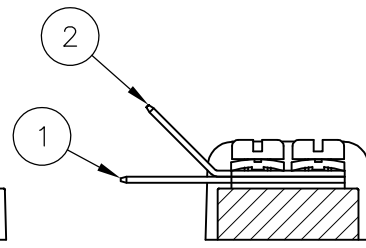

5-1546307-0



MARK BOTH SIDES



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1546307-2](#) [1546307-9](#) [2-1546307-0](#) [3-1546307-6](#) [3-1546307-8](#)