

NUMBER C-177912




METRIC





- NOTES:
1. PRODUCT SPEC, 1108-5410
  2. APPLICABLE CONTACT P/N  
TAB CONTACT: 177917-L (\*20-#16AWG)  
177916-L (\*26-#22AWG)
  3. MATING CONN. P/N  
PLUG HSG: 177904-L  
REC CONTACT: 177915-L (\*20-#16AWG)  
177914-L (\*26-#22AWG)
  4. APPLICABLE PLATE P/N: 177921
  5. INSTRUCTION SHEET: 411-5638
  6. APPLICABLE PANEL THICKNESS: 0.8-2.0 (SEE FIG 1)
  7. INSERT CONN. FROM PRESS DIRECTION SIDE FOR METAL PANEL.
  8. EDGE OF THICKNESS MAY MUST NOT ROUND FOR MOLDED PANEL. SEE TABLE 1
  10. ALL PARTS MEET RTI ELECTRICAL RATING OF 105C ACCORDING TO UL 1977.

表1 (TABLE 1)

| トレードマーク (TRADE MARK) | 生産場所 (MANUFACTURING PLACE) |
|----------------------|----------------------------|
| —AMP OR AMP          | 日本 (JAPAN)                 |
| —+AMP OR AMP         | 中国 (CHINA(PRC))            |
| —AMP OR AMP          | 韓国 (KOREA)                 |

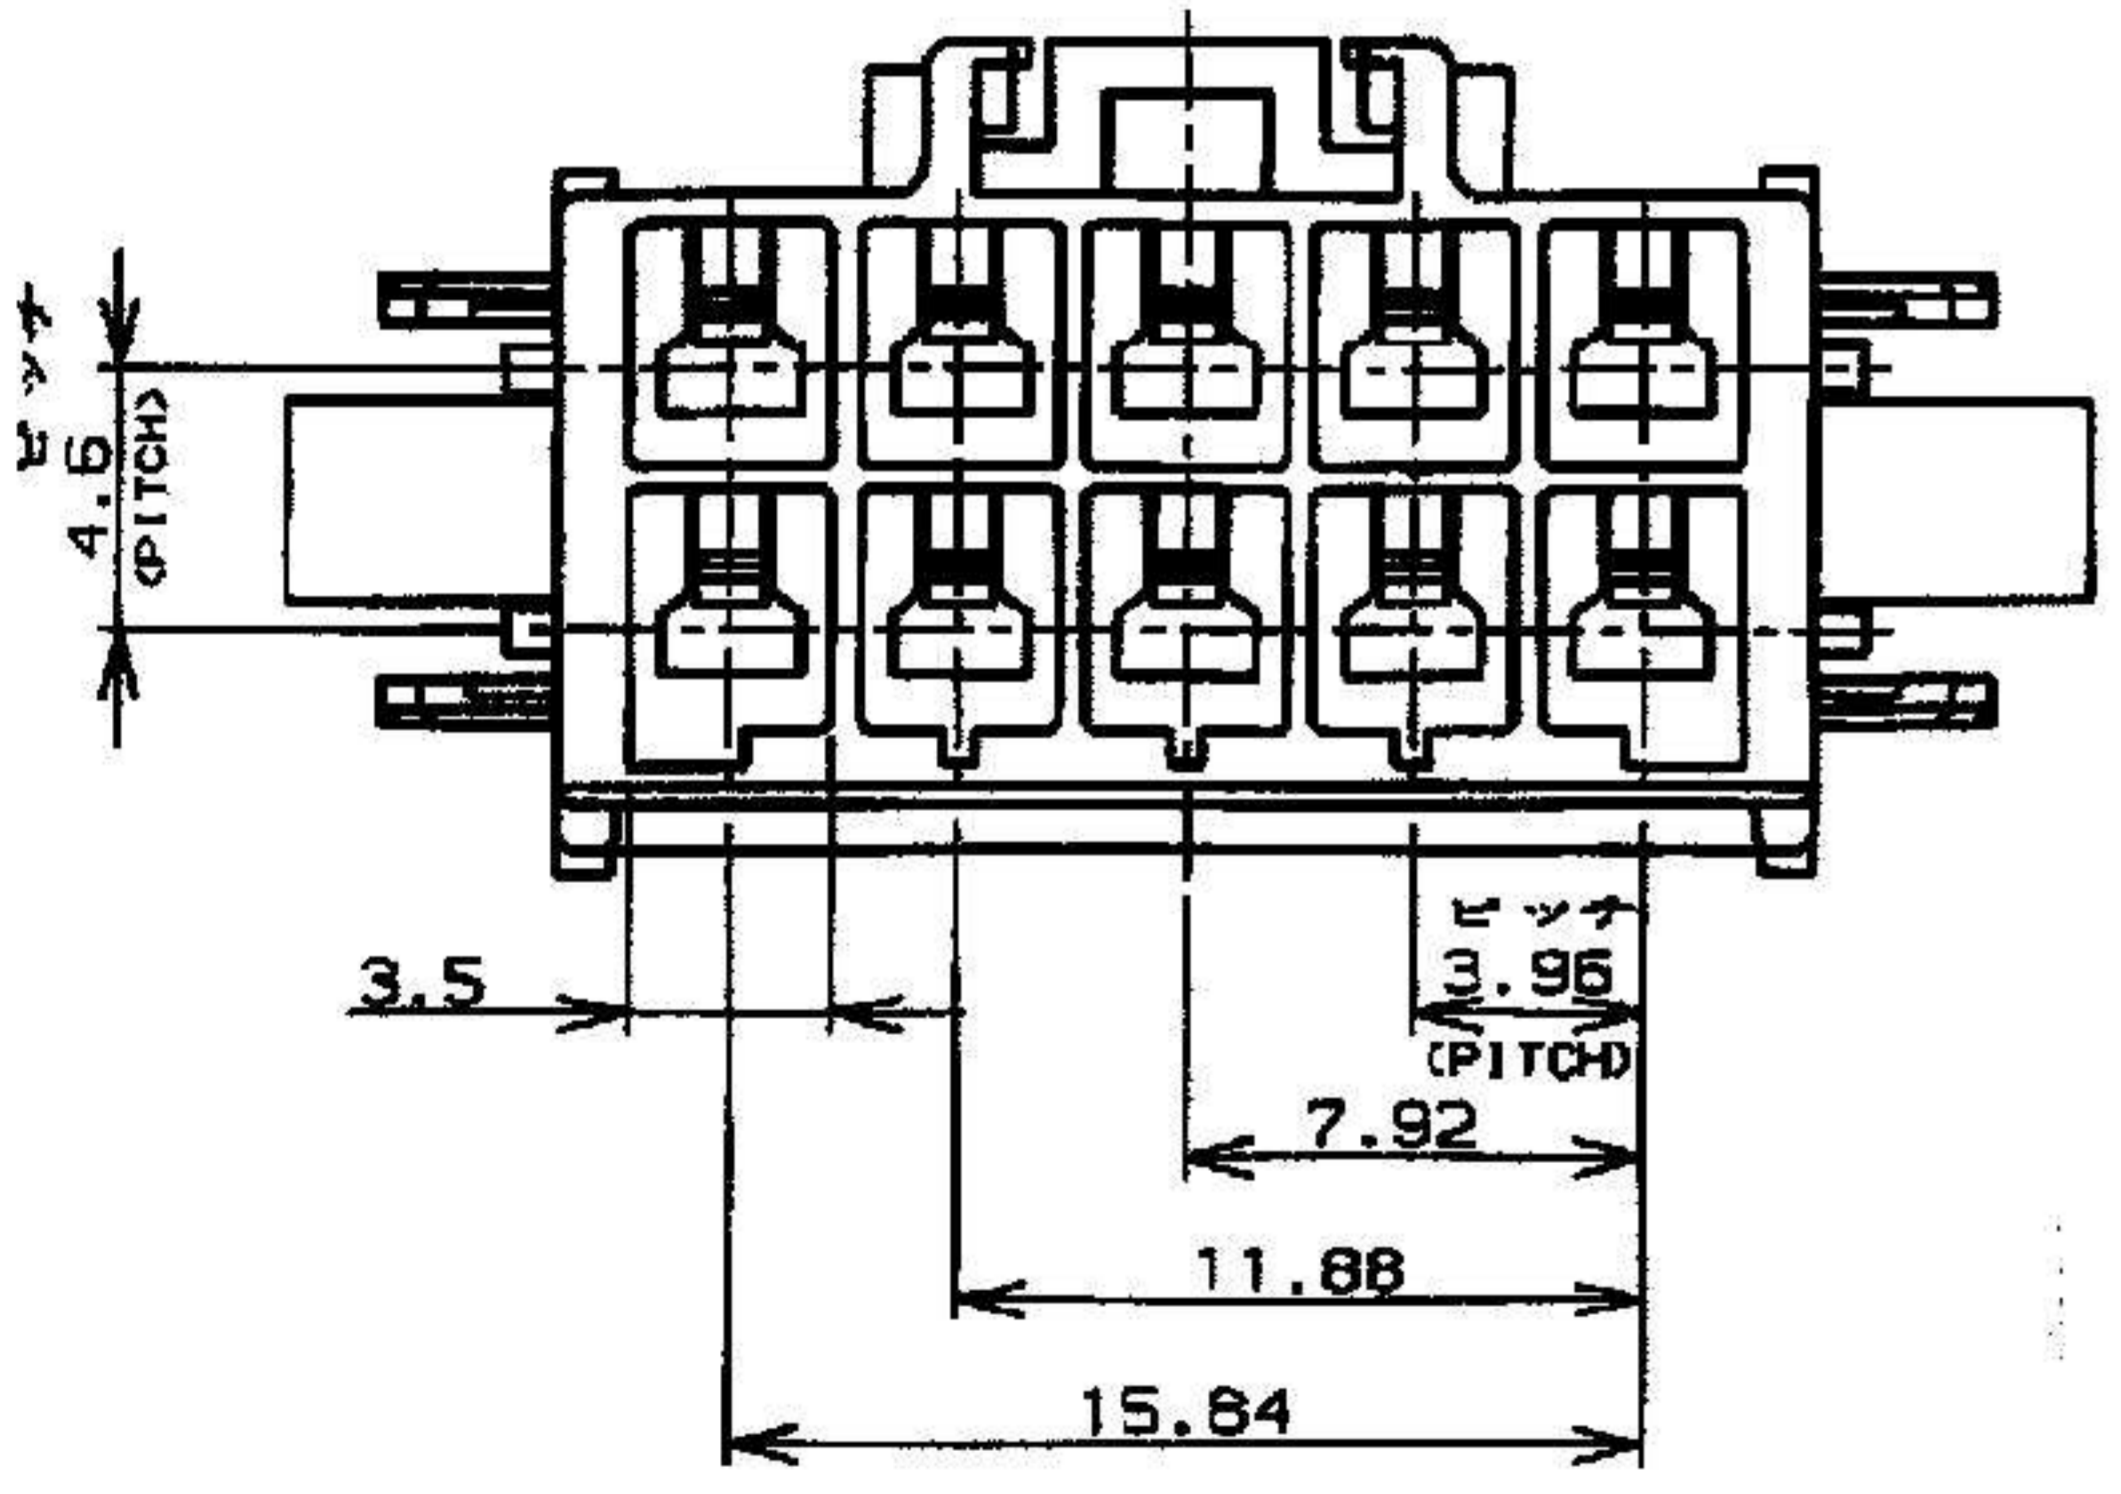

- 注:
1. 適用規格: 108-5410
  2. 適用コネクタ型番  
タブ・コネクタ: 177917-L (\*20-#16AWG)  
177916-L (\*26-#22AWG)
  3. 適合相手規格型番  
プラグ・ハウジング: 177904-L  
リセ・コネクタ: 177915-L (\*20-#16AWG)  
177914-L (\*26-#22AWG)
  4. 適用プレート型番: 177921
  5. 取扱説明書: 411-5638
  6. 適用パネル厚: 0.8-2.0 (FIG 1参照)
  7. 金属パネルの場合、コネクタ取付方向をハンチ加工方向にしてください。
  8. プラスチック、パネルの場合、穴端部にRを施す必要がございます。
- 表1参照

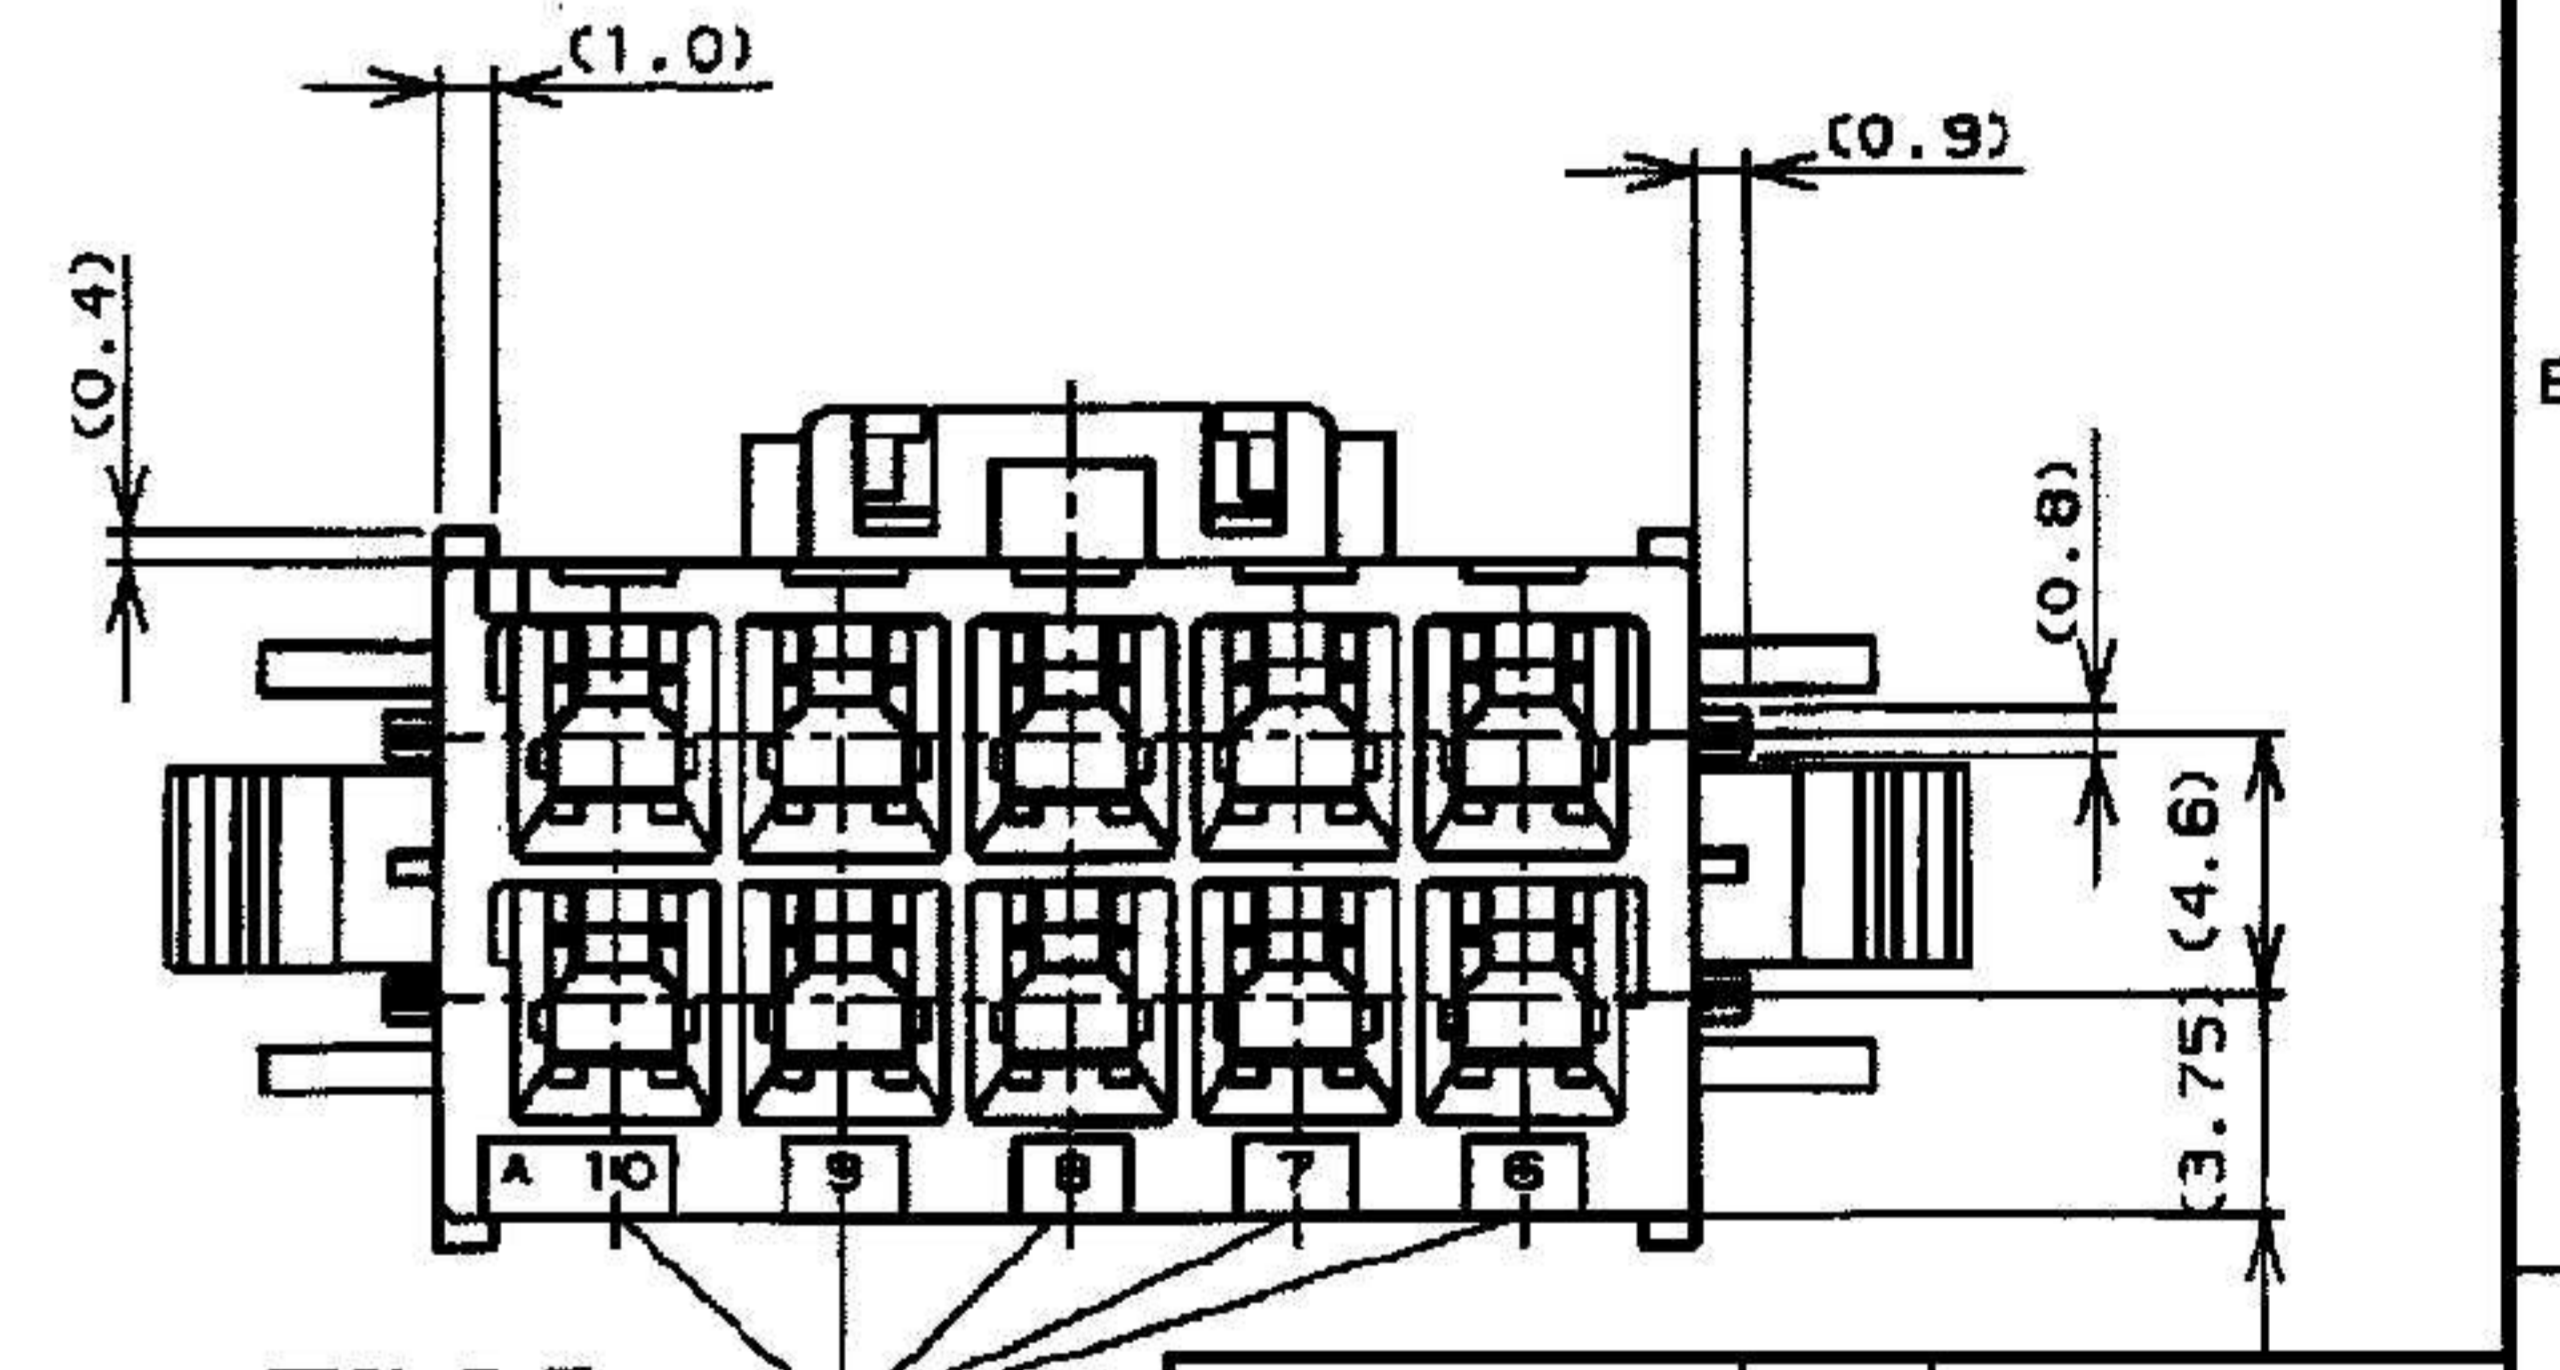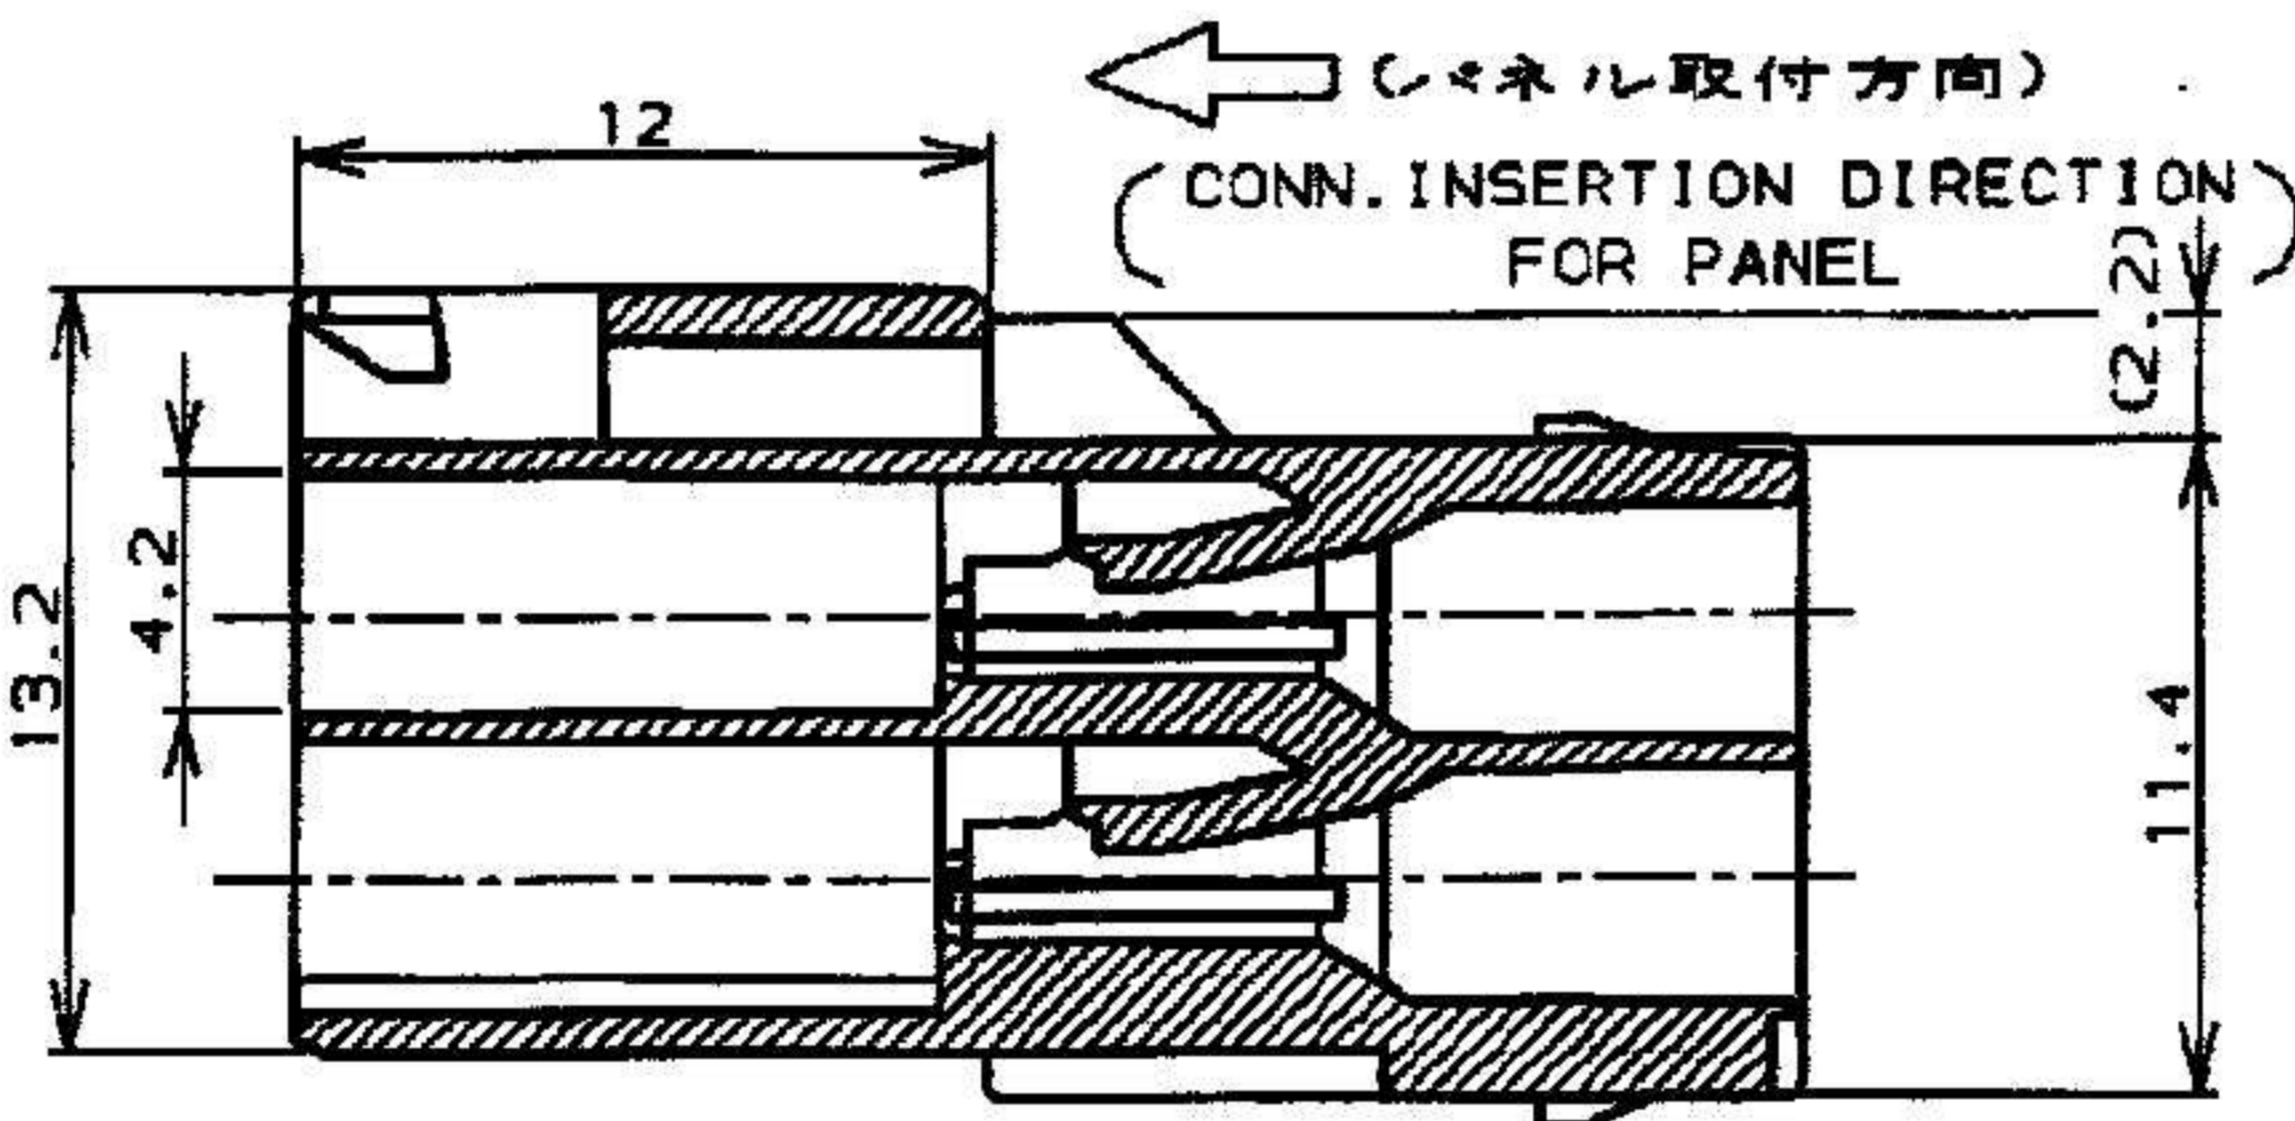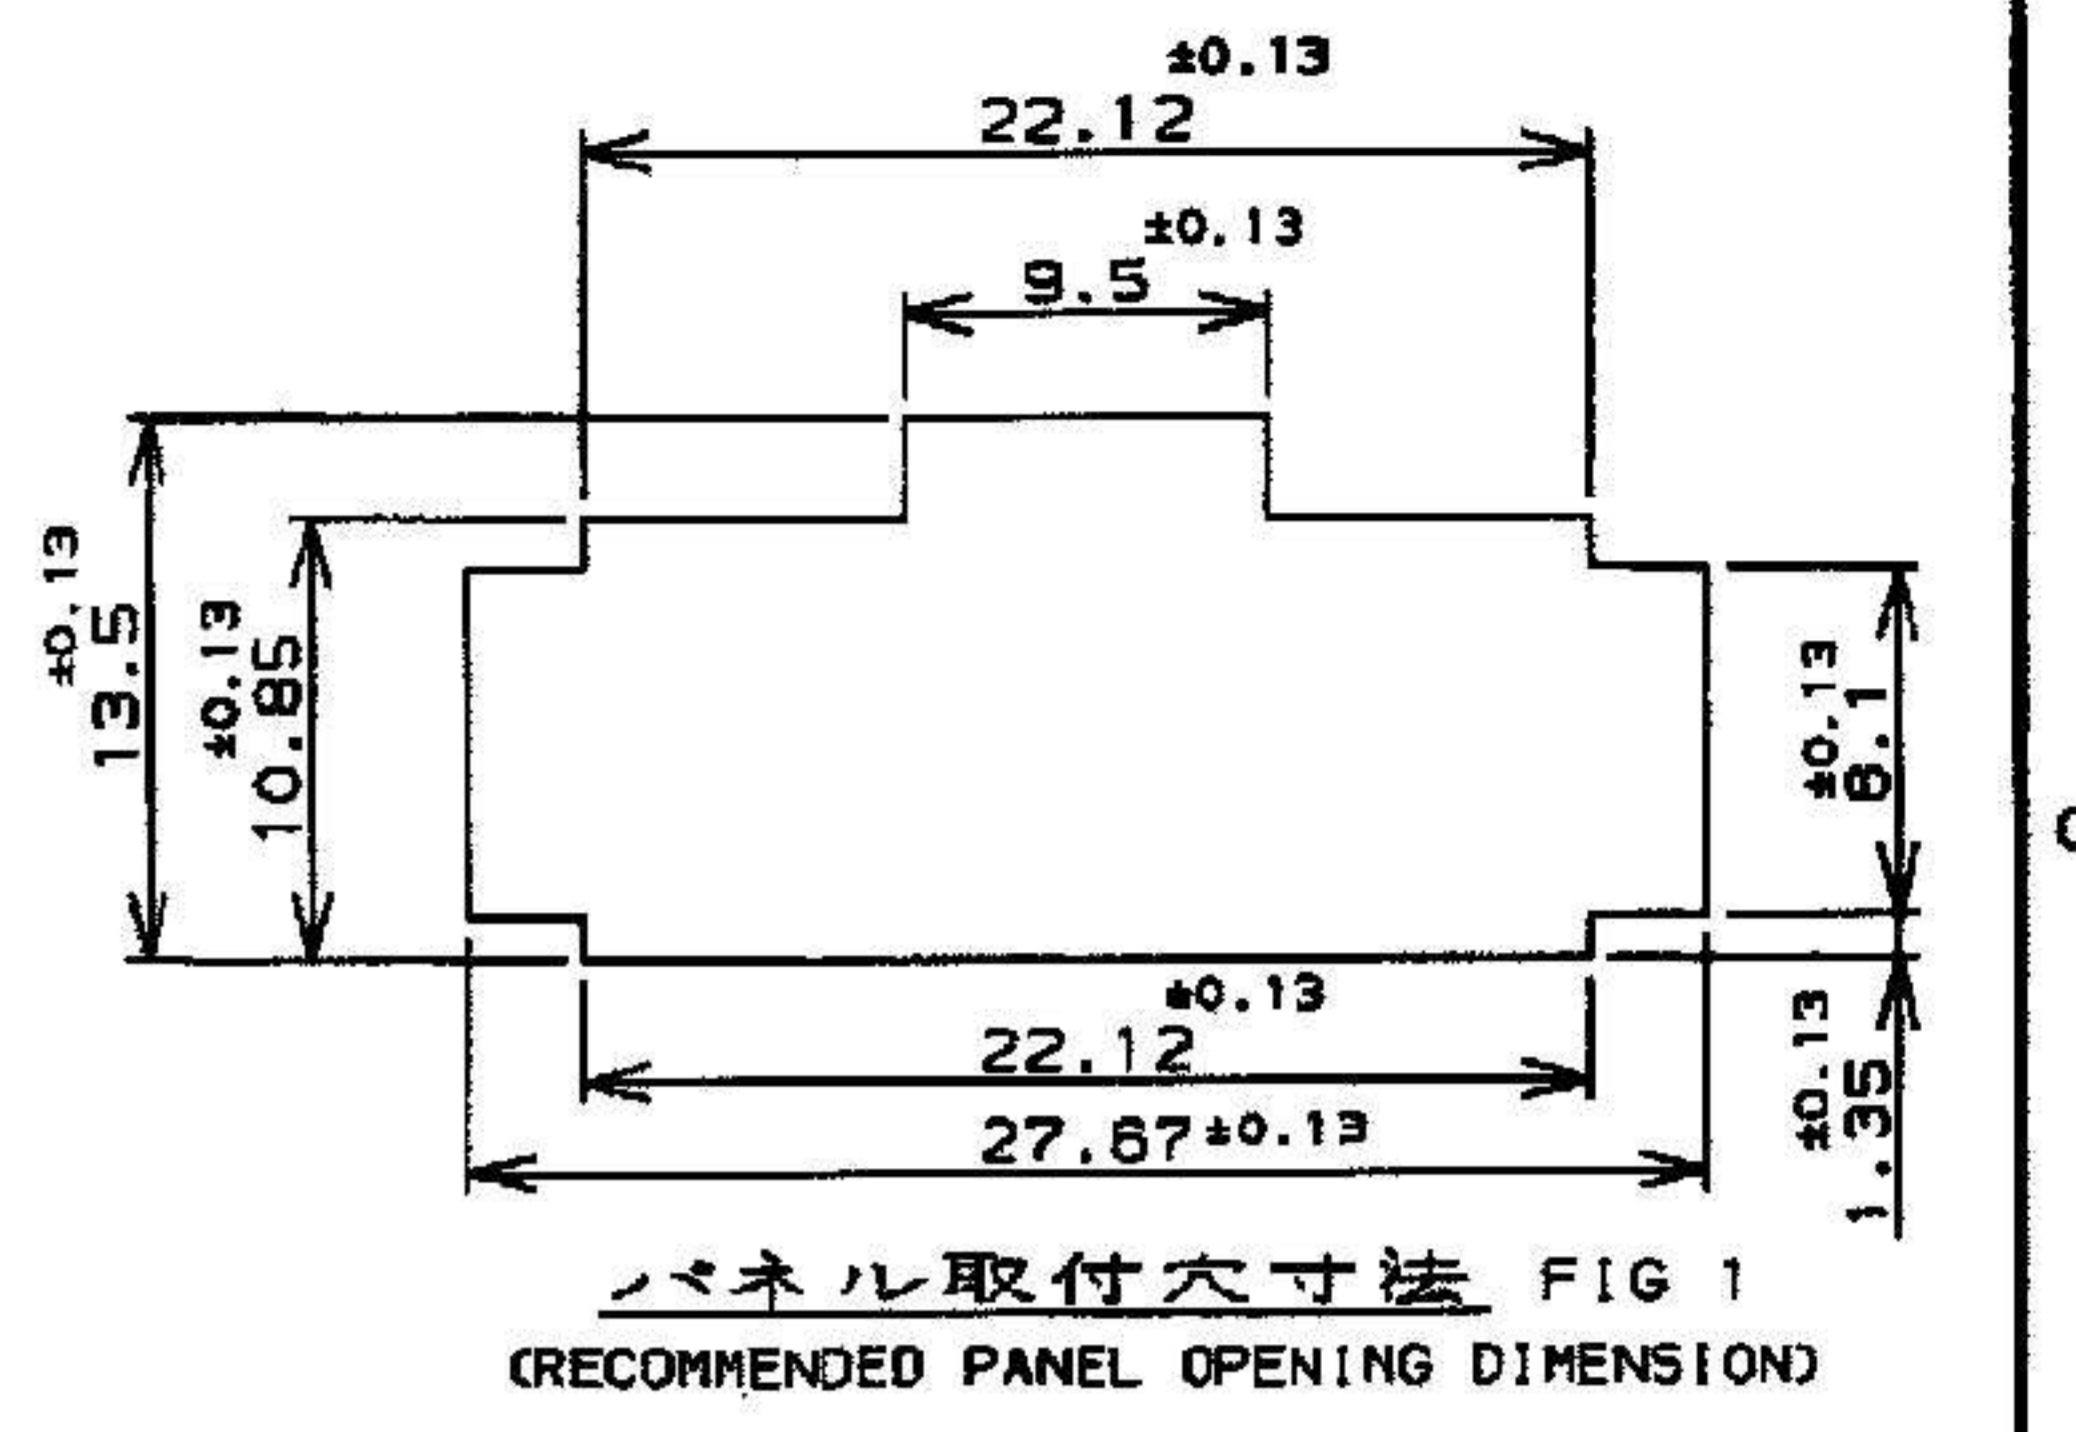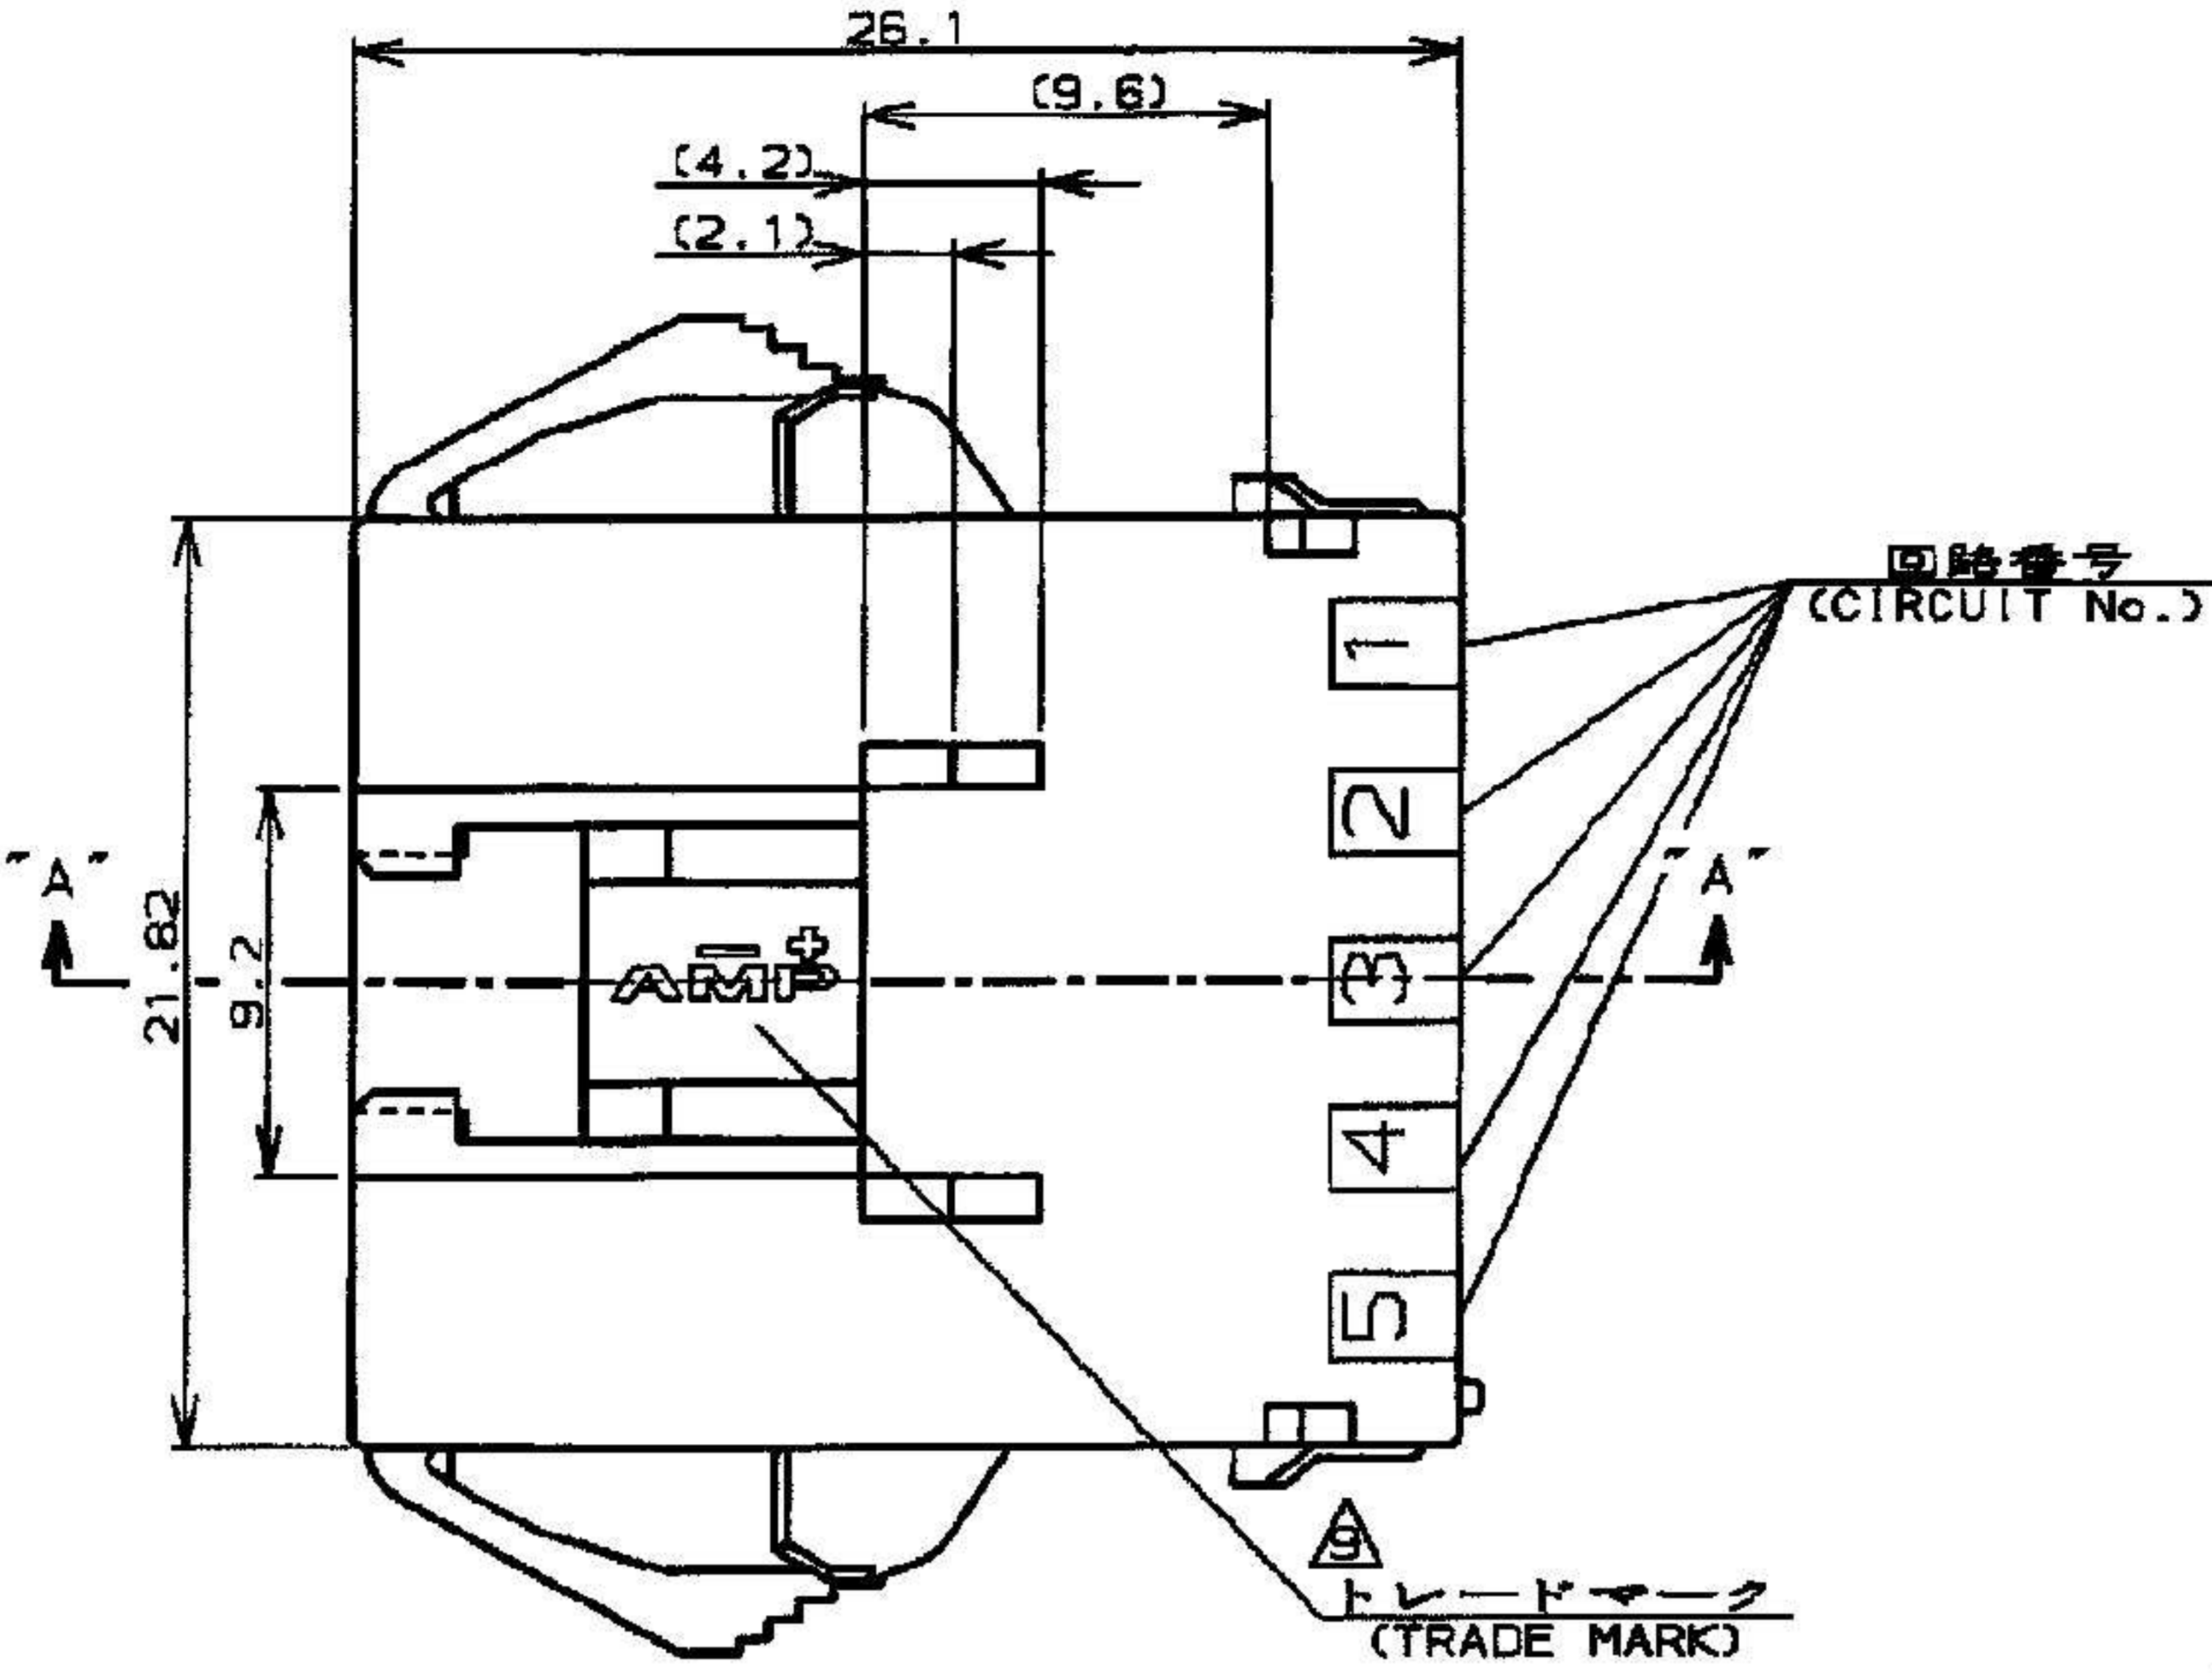

11. PART 5-177912-1 COMPLY WITH GLOW WIRE REQUIREMENT FOR PARTS OF NON-METALLIC MATERIAL SUPPORTING A CURRENT-CARRYING CONNECTION DETAILED IN IEC 60335-1, SECTION 30 (GWT)
  12. PART 177912-7 COMPLY WITH HOT WIRE REQUIREMENT, PA66, UL 94V-0, HOT WIRE IGNITION (HWI) VERSION ARE MOLDED IN A RESIN THAT COMPLIES WITH THE HOT WIRE IGNITION TEST 109-32026 AND ARE RECOMMENDED FOR USE WITH HWI HOUSING THAT ALSO COMPLY.
- △ Preliminary-not for production

|                         |           |            |
|-------------------------|-----------|------------|
| 自然色 (NATURAL)           | 10        | 177912-7 △ |
| 自然色 (NATURAL)           | 10        | 5-177912-1 |
| 青 (BLUE)                | ↑         | ↑ -6       |
| 黄 (YELLOW)              | ↓         | ↓ -4       |
| 自然色 (NATURAL)           | 10        | 177912-1   |
| ハウジング色調 (HOUSING COLOR) | 種数 (Pos.) | 型番 (P/N)   |

| REV. | DESCRIPTION           | BY   | DATE | DR.        | DATE | CHK. | DATE | APP. | DATE |
|------|-----------------------|------|------|------------|------|------|------|------|------|
| B4   | REVISED ECR-14-017020 | W.W. | D.Z. | 14NOV 2014 |      |      |      |      |      |
| B3   | REVISED ECR-14-013449 | W.W. | D.Z. | 14SEP 2014 |      |      |      |      |      |
| B2   | REVISED ECR-14-001994 | A.Z. | D.Z. | 11FEB 2014 |      |      |      |      |      |
| B1   | REVISED ECR-12-019929 | A.Z. | F.M. | 16NOV 2012 |      |      |      |      |      |
| B    | 変更 (FJ00-1369-01)     | NY   | NY   | 11JUL 91   |      |      |      |      |      |
| A    | 変更 (FJ00-0953-98)     | TY   | NY   | 27JUL 81   |      |      |      |      |      |
| O    | 作成 (FJ00-3259-95)     | N.Y. | N.Y. | 22NOV 95   |      |      |      |      |      |
| LTR  | 変更 (REVISION RECORD)  | DR   | CHK  | DATE       | CHK. | DATE | APP. | DATE |      |

**AMP** Tyco Electronics AMP K.K. Kawasaki, Japan

|   |      |        |          |
|---|------|--------|----------|
| 名称 (NAME) アンブ パワー ダブルロック コネクタ   |      |        |          |
| 10極 3.95mmピッチ キャップ・ハウジング (パネル取付タイプ)                                       |      |        |          |
| AMP POWER DOUBLE LOCK CONN. 8.05mm PITCH CAP HOUSING 10 POS (PANEL MOUNT) |      |        |          |
| 一級公差  | SIZE | LOC    | 番号 (No.) |
|   | B    | J      | C-177912 |
| 16mm下: ±0.2   |      |        |          |
| 10mm上 30mm下: ±0.25  |      |        |          |
| 30mm上 100mm下: ±0.3  |      |        |          |
| 角 度: ±3°  |      |        |          |
| 尺度 (SCALE)  | REV. | SHEET  |          |
|   | B4   | 1 OF 1 |          |

CUSTOMER DRAWING

PRINT DIST  
AMP-J  
REV. 10/95  
F1028600