

PRODUCT NUMBER

95253-YXXXLF

WHEN REQUIRED, ADD SUFFIX LETTER "LF" INDICATES THE PRODUCT IS RoHS COMPATIBLE, NOTE 6.
PACKAGING OPTIONS, NOTE 3.

PLATING

- 1 = 0.76µm GOLD/GXT (FULL PLATED)
ON 1.27µm NICKEL MIN
- 3 = 2µm MIN MATTE TIN (FULL PLATED)
ON 1.27µm NICKEL MIN
- 8 = 0.38µm GOLD/GXT (FULL PLATED)
ON 1.27µm NICKEL MIN

STYLE	SIZE	DIM"A"	OMIT PIN
01	2x07	5.9	A3
02	2x07	8.0	A3
03	2x04	5.9	B4
04	2x07	5.9	B4
05	2x08	5.9	B7

NOTES:

1. HOUSING MAT'L : HIGH TEMPERATURE THERMOPLASTIC. UL94V-0 COLOR: BLACK
2. PIN MATERIAL : PHOSPHOR BRONZE

3 - PACKAGING OPTIONS:

- = POLY BAGS
B = TUBE + CAP
A = TAPE & REEL WITH CAP, AS AVAILABLE

4. 9N MIN RETENTION IN EITHER DIRECTION
5. TO DETERMINE DIMENSIONS :
N = NUMBER OF POSITIONS PER ROW
EXAMPLE : 8 POS N x 2.54 = 20.32mm
6. RoHS COMPATIBLE PRODUCT SPECIFICATIONS

a - PLATING:

- "LF" MEANS THE PRODUCT IS LEAD-FREE, 2µm MINIMUM MATTE TIN OVER 1.27µm MINIMUM NICKEL UNDERPLATE.





b - MANUFACTURING PROCESS COMPATIBILITY

- THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 30 SECONDES IN A CONVECTION, INFRA-RED OR VAPOR PHASE REFLOW OVEN.

c - LABELING:

- MEETS PACKAGING SPECS AS PER GS-14-920

d - LEGAL STATEMENT: SEE GS-47-0004

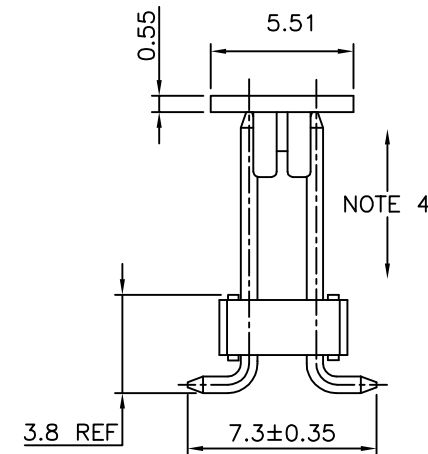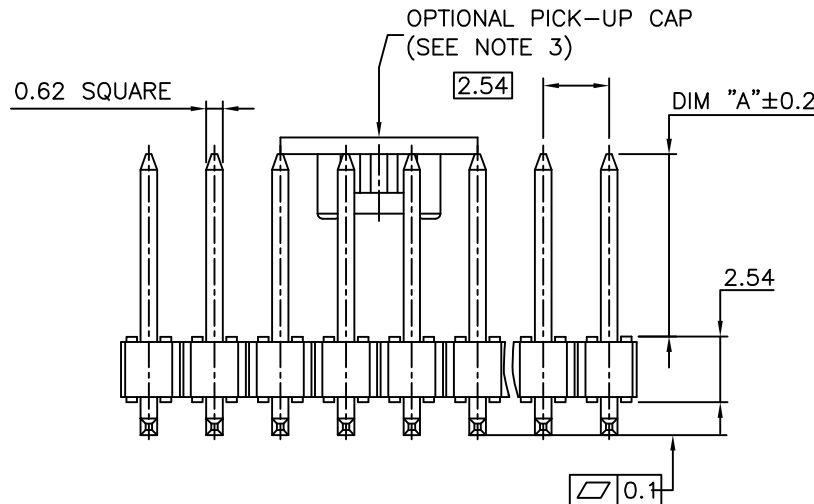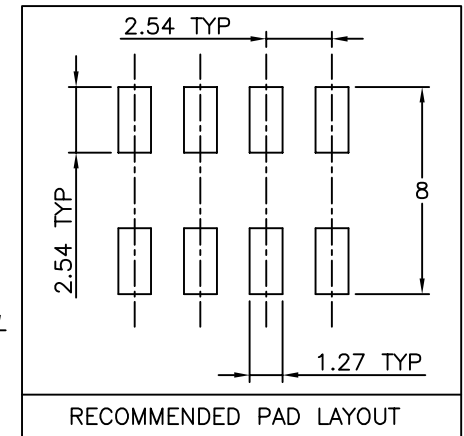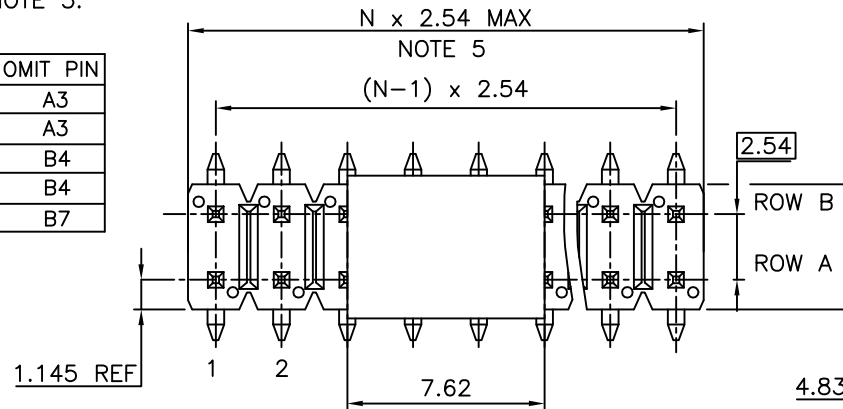

mat'l. code				surface		tolerance		projection		product family			
				ISO 1302 ✓		ISO 406 ISO 1101				HEADER			
ltr	ecn no	dr	date	tolerances unless otherwise specified						title			
H	F90366	LMU	99.06.08	angles	linear	x.x ±0.3				HEADER DR, SMT,POLARIZED			
J	F03-0201	LMU	03.04.23			x.xx ±0.13							
K	F04-0362	LMU	04.11.30			x.xxx ±0.05							
L	F06-0168	LMU	06.04.21	dr	P.NIZZI		96.04.15			dwg no		sheet 1 of 1	size
M	F06-0208	JCO	06.06.22	enrg	J. COMPAGNON		96.04.15			95253		A3	
N	F08-0148	JCO	08.05.27	chr									
P	F-23191	AMA	16.02.01	appd	JMC		96.04.15			type		CUSTOMER	Drawing
sheet index		revision sheet											



95253

CUSTOMER Drawing