




SEZIONE A-A
(SECTION A-A)

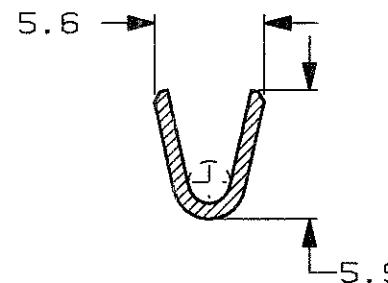


SEZIONE B-B
(SECTION B-B)

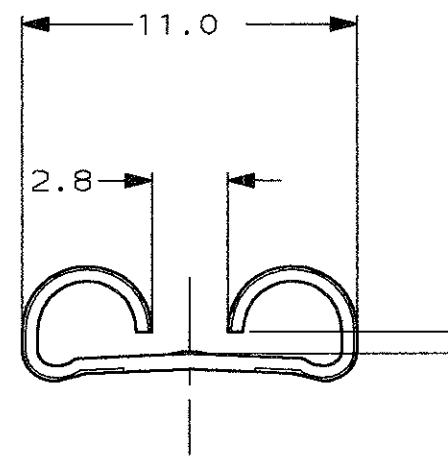

ADATTO PER LINGUETTA DI 1.2 mm
(TO FIT TAB 1.2 mm THK)

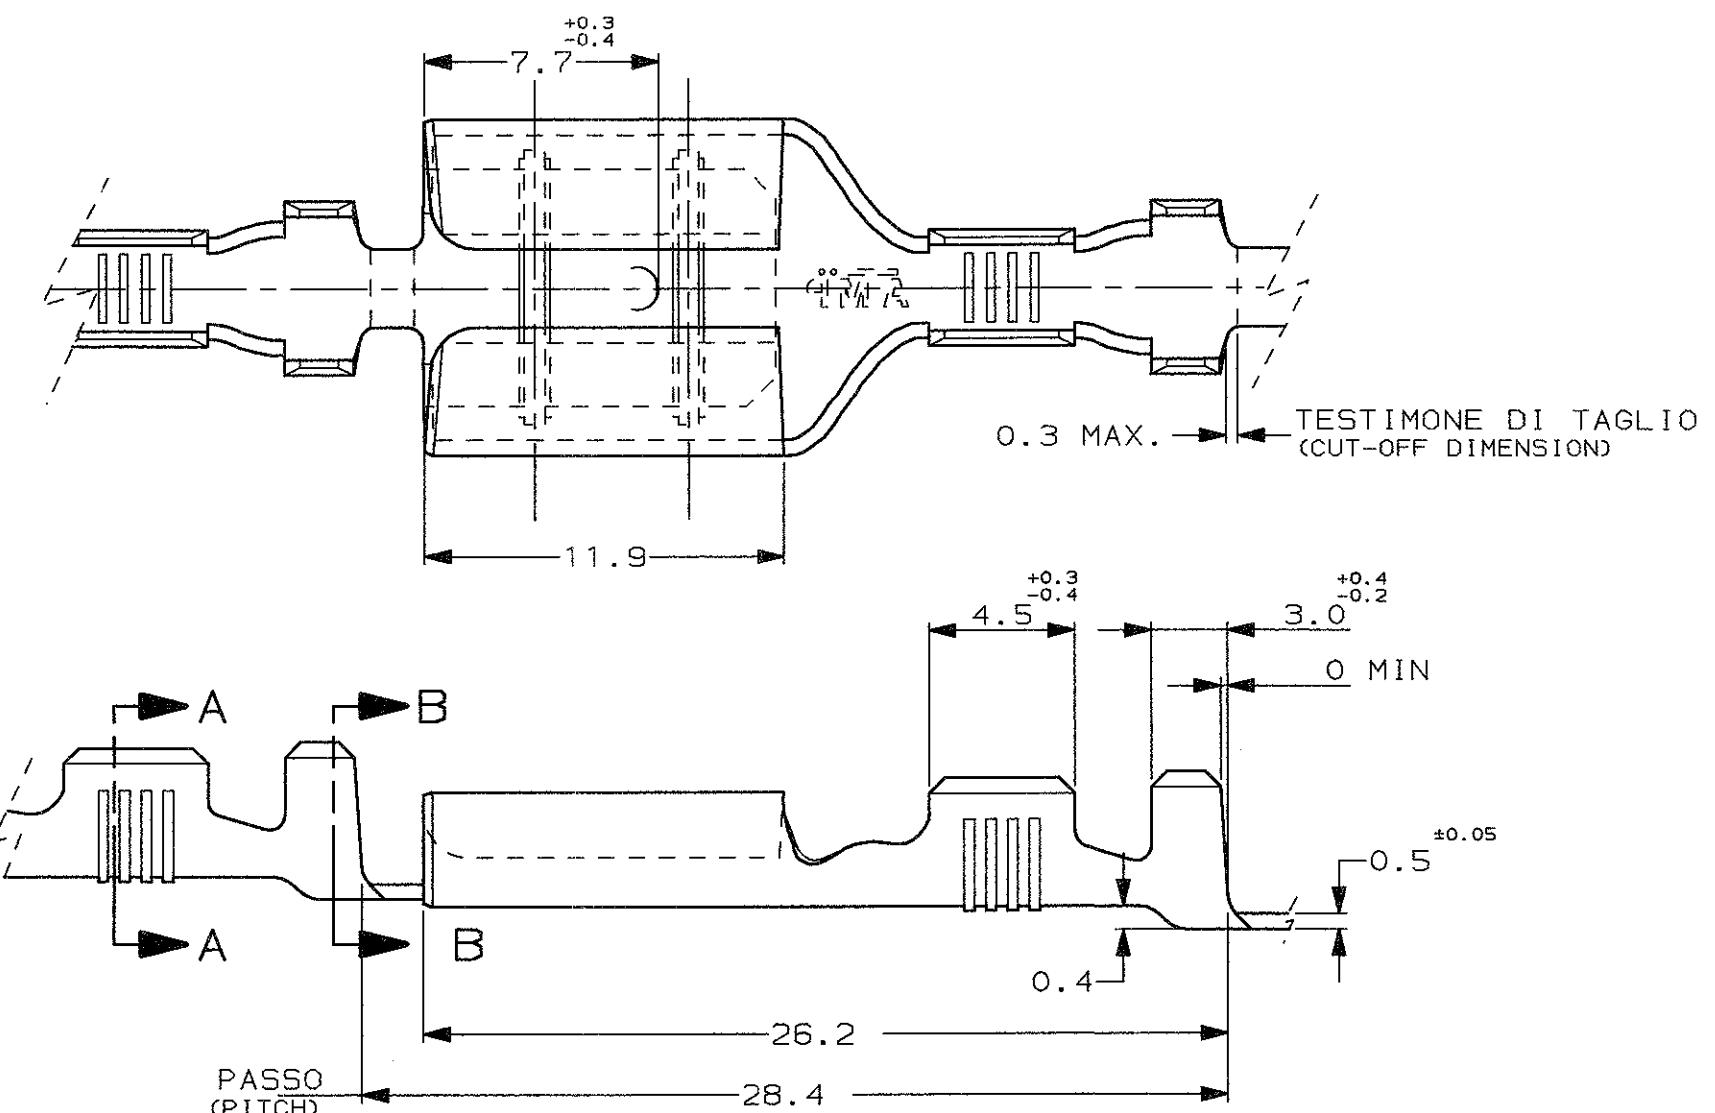

1) STATO DI FORNITURA - SCALA 1:1
(SUPPLY CONDITION - SCALE 1:1)



SENSO DI USCITA
DEL TERMINALE
DALLA BOBINA
(DIRECTION OFF
TOP OF REEL)

2) SPECIFICA DI PRODOTTO 108-20019
(PROD. SPEC. 108-20019).

3 BOBINATO CON FASCIATURA ESTERNA
(CREELED WITH PAPER COVER)

4 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING
PER D.RENAUD/D.SINISI

3	NUDO (UNPLATED)	OTTONE (BRASS)	5-160521-8	V		
4	OBSOLETE	-	BRONZO FOSF. (PH. BRONZE)	5-160521-3		
	-	STAGNATO (TIN PLATED)	OTTONE (BRASS)	5-160521-2		
	NOTES	FINITURA / COLORE (FINISH / COLOUR)	MATERIALE (MATERIAL)	NUMERO (CAMP P/N)		
CUSTOMER DWG. FOR REFERENCE ONLY			DISEGNO PER CLIENTE SOLO PER RIFERIMENTO			
THIS DRAWING IS UNPUBLISHED RELEASE FOR PUBLICATION 19						
© COPYRIGHT 19 BY AMP INCORPORATED, HARRISBURG, PA. ALL INTERNATIONAL RIGHTS RESERVED. AMP PRODUCTS MAY BE COVERED BY U.S. AND FOREIGN PATENT AND/OR PATENT PENDING						
TOLLERANZE, SE NON DIVERSAMENTE SPECIFICATO		DIAM. ISOLANTE (INS. DIA. RANGE)	RANGO FILO (WIRE RANGE) mm ²	SCALA (SCALE)		
(TOLERANCES, UNLESS OTHERWISE SPECIFIED)		4.0-6.0	3.8-5.1	4:1		
± 0.3		ANGOLI (ANGLES)	± 2°			
± 2°						
V1	REVISED PER ECO-09-022178	KK 22SEP 00	DIS. R. FABRIS C.R. 22 MAR 00	AMP ITALIA S.p.A. Corso F.lli Cervi, 15 COLLEGNO (TORINO)		
			CONT. C. TARTARI C.C. 22 MAR 00	DESCRIZIONE (DESCRIPTION) FASTON® Connector .375" sr. REC. CONTACT		
V	OBSOLETE P/NS AND REDRAWN ETOQ-0305-99	R.F. 08 MAR 00	APP. CAPP. 1	LOC. SIZE NUMERO (DWG NO)		
REV.	REVISIONI (REVISION RECORD)	DIS. DATA (DATE)	DATA (DATE)	REV. FOGLIO (SHEET) V1 1 DI (OF) 1		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[5-160521-2 \(Mouser Reel\)](#) [5-160521-2 \(Cut Strip\)](#)