
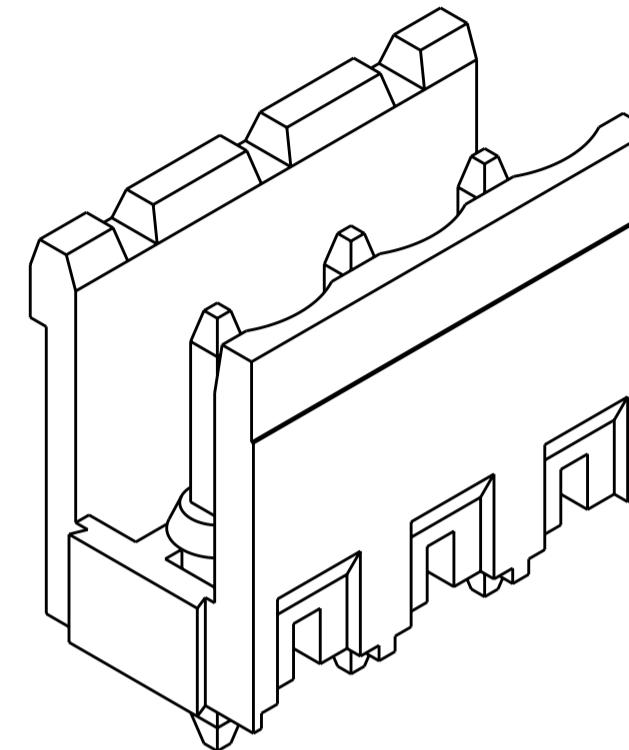


THIS DRAWING IS UNPUBLISHED.	RELEASED FOR PUBLICATION	20
© COPYRIGHT 2000	Tyco Electronics AMP GmbH	ALL RIGHTS RESERVED.




LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	OWN	APVD
FT	0	01		REVISED PER ECO-12-007711	26APR2012	KH	MS

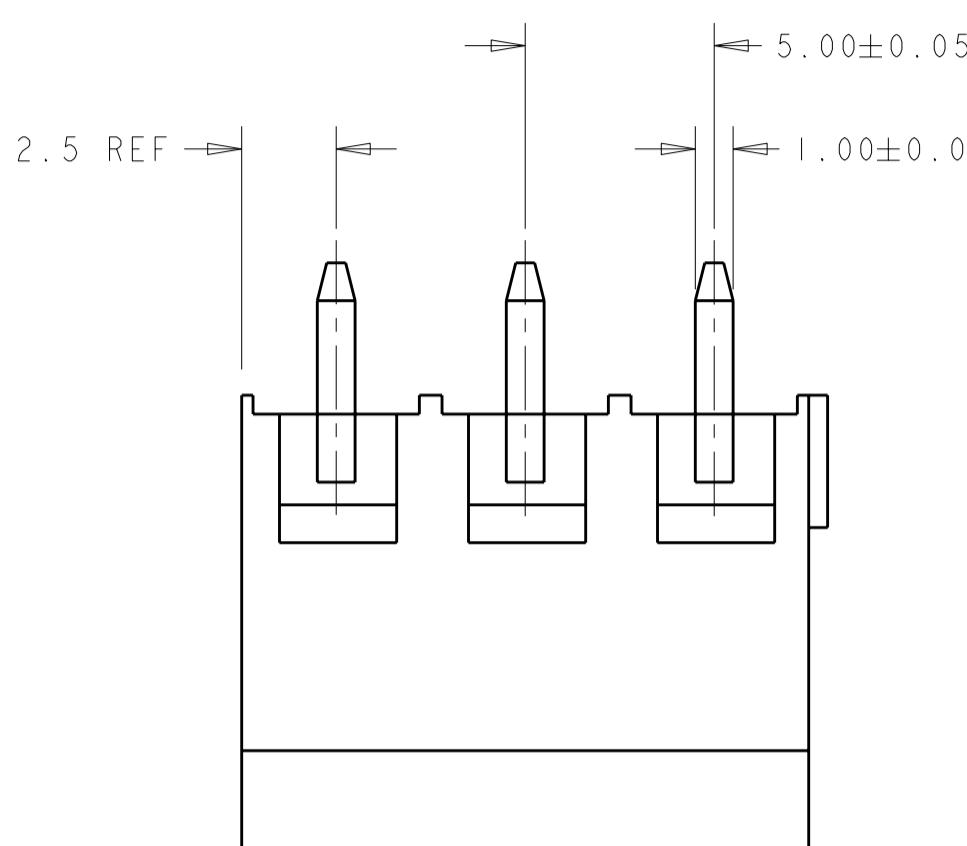

! MATERIALS AND FINISH
HOUSING: HIGH TEMPERATURE POLYAMIDE, UL 94V-0 RATED,
COLOR: BLACK.
TERMINAL: COPPER ALLOY, TIN PLATED.

2. SUITABLE FOR 1, 6-2, 4mm PC BOARD THICKNESS.
3. END-TO-END STACKABLE WITHOUT LOSS OF CENTERLINE SPACING.
4. RECOGNIZED UNDER THE COMPONENT PROGRAM OF UNDERWRITERS LABORATORIES INC., FILE N° E60677.
5. IMQ CERTIFICATE WITH SURVEILLANCE IN CONFORMITY WITH IEC 998-1/998-2-1.
6. UL RATING: 300V, 15A.

1776142-3 AS SHOWN

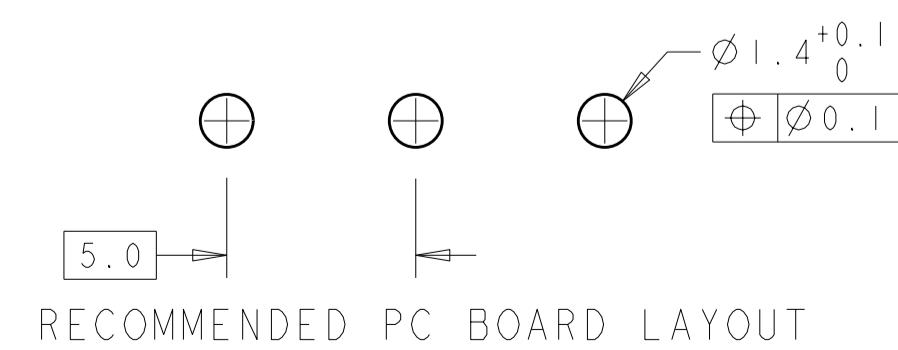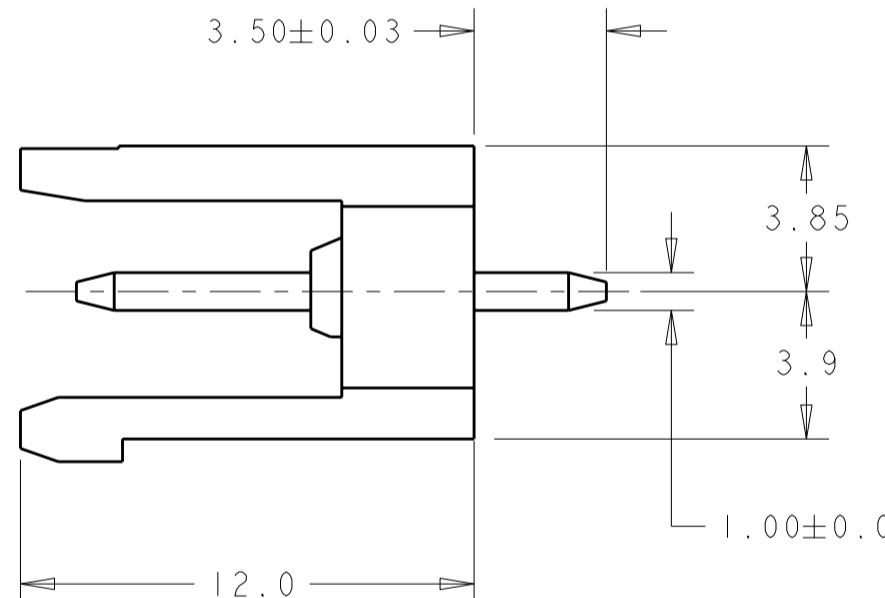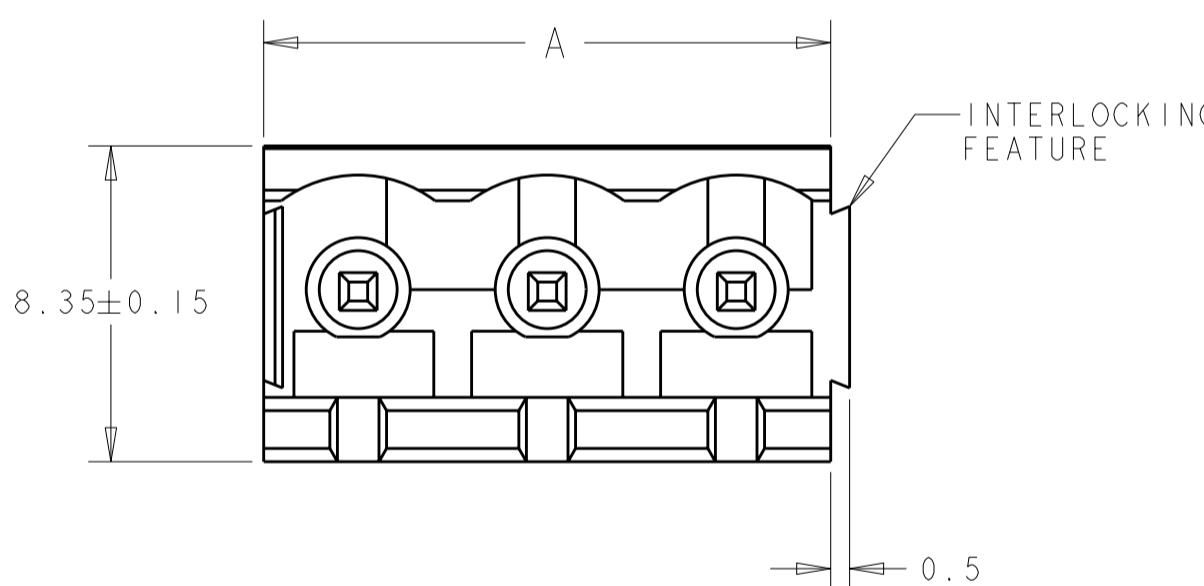

THIS DRAWING IS A CONTROLLED DOCUMENT.	DWN S. WELDON CHK C. RICHARD APVD C. RICHARD	28JUN2005 28JUN2005 28JUN2005 108-20166 APPLICATION SPEC 114-20079 WEIGHT -	TE Connectivity
DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:		
0 PLC 1 PLC 2 PLC 3 PLC 4 PLC ANGLES	±.2 ±.25 ±.25 ±.25 ±.25 ±.2		
MATERIAL	FINISH		
! RECOMMENDED PC BOARD LAYOUT	! CUSTOMER DRAWING	! REV 01	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1776142-2](#)