
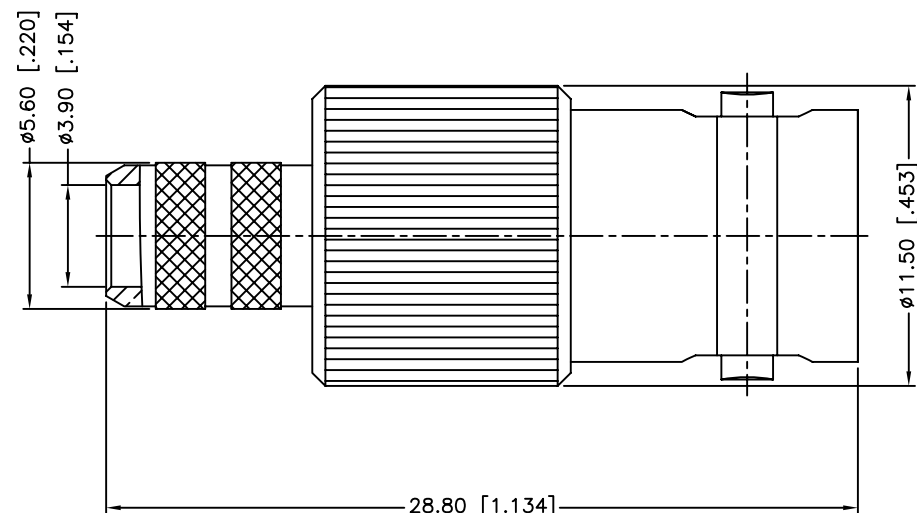
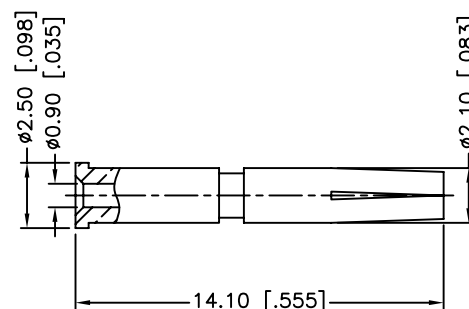


RECOMMENDED
CABLE STRIPPING DIM'S

REV.	DATE	ECR NO.	DESCRIPTION
NC	05/30/00	XXXXXX	INITIAL RELEASE
A	03/18/05	XXXXXX	UPDATE DRAWING FORMAT
B	05/16/13	2474	CORRECT FERRULE MATERIAL, UPDATE DRAWING FORMAT

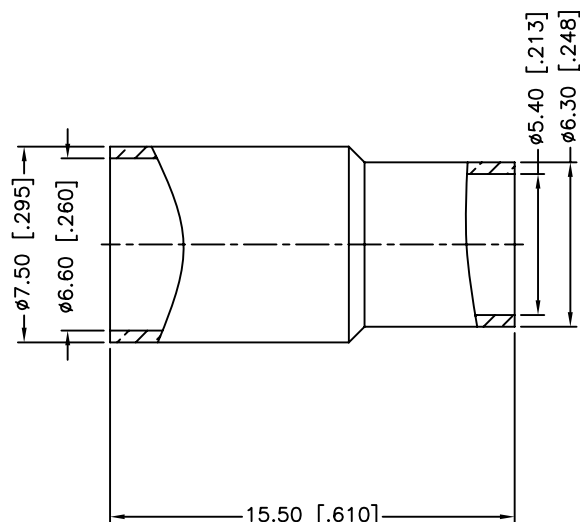

1. IMPEDANCE: 75 OHM
2. FREQUENCY RANGE: DC-2 GHz
3. VSWR: 1.22 MAX. @ 10-400 MHz
4. DIELECTRIC WITHSTANDING VOLTAGE: 300 VRMS, MIN.
5. DURABILITY: 500 CYCLES MIN.
6. TEMPERATURE RANGE: 0°C TO +70°C
7. CRIMPED FERRULE
HEX. CRIMP SIZE .255"
8. CRIMPED CONTACT PIN
HEX. CRIMP SIZE .068"

DESCRIPTION	MATERIAL	FINISH	QTY
5 FERRULE	BRASS	NICKEL	1
4 CONTACT PIN	PHOSPHOR BRONZE	GOLD	1
3 INSULATOR	PTFE	NATURAL	1
2 BODY	BRASS	NICKEL	1
1 HOUSING	BRASS	NICKEL	1

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE
IN MILLIMETERS. DIMENSIONS IN [] ARE IN
INCHES AND FOR CUSTOMER REFERENCE ONLY.
UNLESS OTHERWISE SPECIFIED
TOLERANCES FOR MILLIMETERS ARE:
<0.5 ± 0.05mm
0.5 - 6mm ± 0.10mm
6 - 30mm ± 0.20mm
30 - 120mm ± 0.30mm
ANGLES ± 1°

UNLESS OTHERWISE SPECIFIED
TOLERANCES FOR INCHES ARE:
<.020 ± 0.002"
.020 - .236 ± 0.004"
.236 - 1.180 ± 0.007"
1.180 - 4.724 ± 0.012"
ANGLES ± 1°

DO NOT SCALE DRAWING

APPROVALS	DATE
DRAWN M.ZHANG	05/16/13
CHECKED	
ISSUED	
SHEET 1 OF 1	
CAD FILE	C:/CONNEX/112645.DWG

Amphenol Connex

PART DESCRIPTION
BNC CRIMP JACK (FOR RG-59/U PLENUM ENTER CONTACT-20AWG CABLE)
PART NO.
112645
DWG. NO.
112645.DWG
REV.
B
SIZE
A
SCALE
NA

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[112645](#)