

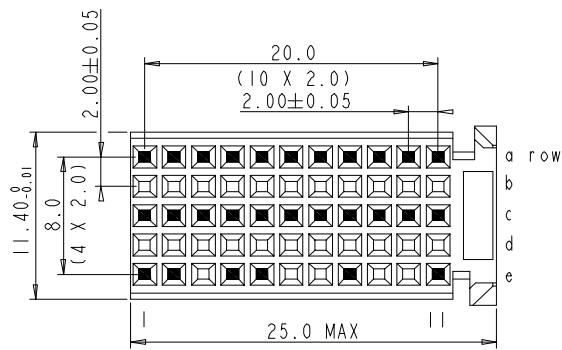
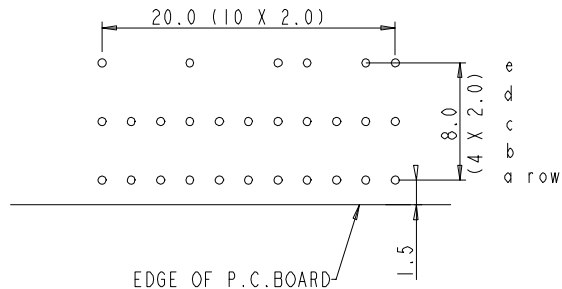


LAY-OUT
P.C.B.- HOLE

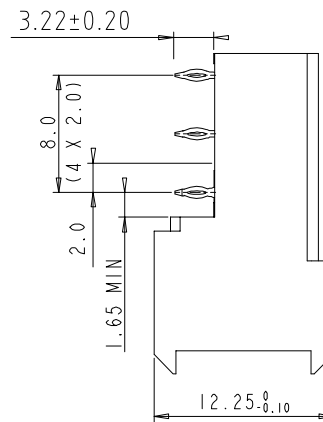

- EMPTY CAVITY
- CAVITY LOADED WITH CONTACT

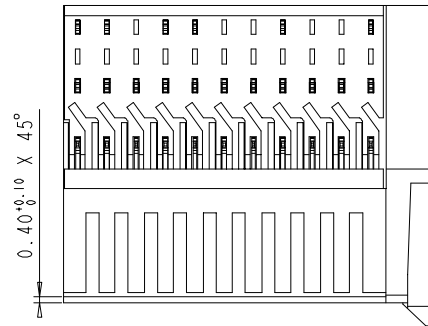

PERFORMANCE CHARACTERISTICS

- CURRENT RATING 1.5A AT 20°C (FULLY LOADED)
1 A AT 70°C (FULLY LOADED)
- RATED VOLTAGE : 500 V AC (CONT /CONT)
- OPERATING TEMPERATURE : -55°C TO 125°C
- CONTACT RESISTANCE 20 mΩ MAX
- INSERTION FORCE : 0.75N MAX/CONT
- EXTRACTION FORCE : 0.15N MIN/CONT
- INSULATION RESISTANCE : 10⁴ MΩ MIN

- NOTES 1. " " LEAD FREE INDICATOR : LF=LEAD FREE
- PERFORMANCE LEVEL INDICATOR
(REF DWG NO.BSC .201844.003)
2. THIS PRODUCT IS CSA APPROVED.
THIS PRODUCT IS UL RECOGNIZED.
 3. FOR RECOMMENDED PTH DIMENSIONS REFER DRAWING :
BS.A.201572.001
 4. THIS PRODUCT (LF) MEETS EUROPEAN UNION DIRECTIVES AND
OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008

rev	ecn no	dr	date
A	CONVERSION REVISION 00	KN	14-09-01
B	DG05-0278	Kason	02-08-05
C	DG10-0110	NZ	2010.9.3
-	-	-	-
-	-	-	-
-	-	-	-

Material				Spec ref							
Mat code			✓	tolerance 1 DEC ± 0.2 1 DEC 2 DEC ± 0.1 2 DEC ANGLES ± 1° HOEKEN		projection 		MM 			
Heat treat											
Plating/Finish											
Dr	M.Fret	05-06-01			size		Scale				
Eng			Product family		MILLIPACS		A4		2.000		
Chr			Model Name				ECN				
Appr			Model Revision				REL Level				
		title				MPACS 5+2R RA RCP CONN TYPE C				dwg no	
						BSC202468032				Rev. C	
Pro/E file		catalog no		HM2R30PACAJ0----		CUSTOMER DRAWING				sheet 1 of 1	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[FCI / Amphenol:](#)

[HM2R30PACAJ0N9LF](#)