


Features

- ◆ DIL-24 plastic package
- ◆ Tightly regulated output
- ◆ Very low output noise
- ◆ Short circuit protection
- ◆ Operating temperature range -25°C to +70°C
- ◆ I/O isolation 1'000 VDC
- ◆ Internal filter
- ◆ Industry standard pinout
- ◆ 3-year product warranty

not recommended for new design in

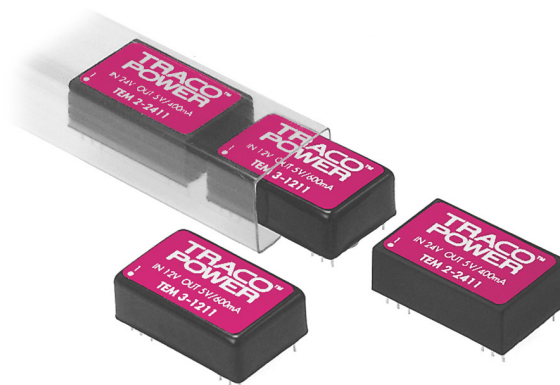

The TEM 2 series is a family of isolated dc/dc converters in a DIP-24 package. They offer tight line/load regulation and 1000 VDC I/O isolation. Standard features include an internal filter to reduce reflected input ripple current and to guarantee low output noise. This product series provides a cost effective solution by many industrial or consumer electronics applications.

Models				
Ordercode	Input voltage range	Output voltage	Output current max.	Efficiency typ.
TEM 2-0511	5 VDC ±10%	5 VDC	400 mA	50 %
TEM 2-0512		12 VDC	165 mA	54 %
TEM 2-0521		±12 VDC	±80 mA	53 %
TEM 2-0522		±15 VDC	±65 mA	51 %
TEM 2-1211	12 VDC ±10%	5 VDC	400 mA	50 %
TEM 2-1212		12 VDC	165 mA	56 %
TEM 2-1221		±12 VDC	±80 mA	59 %
TEM 2-1222		±15 VDC	±65 mA	59 %
TEM 2-2411	24 VDC ±10%	5 VDC	400 mA	51 %
TEM 2-2412		12 VDC	165 mA	61 %
TEM 2-2421		±12 VDC	±80 mA	61 %
TEM 2-2422		±15 VDC	±65 mA	61 %

Input Specifications

Input current no load	5 Vin models: 80 mA typ. 12 Vin models: 40 mA typ. 24 Vin models: 20 mA typ.
Surge voltage (1 sec. max.)	5 Vin models: 7.5 V max. 12 Vin models: 15 V max. 24 Vin models: 30 V max.
Input filter	Pi-Filter

Output Specifications

Voltage set accuracy	±3 %
Regulation	– Input variation Vin min. to Vin max. ±0.3 % max. – Load variation 10 – 100 % single output models: ±0.5 % max. dual output models balanced load: ±1.0 % max. dual output models unbalanced load: ±3.0 % max.
Ripple and noise (20 MHz Bandwidth)	50 mVpk-pk max
Temperature coefficient	±0.02 %/K
Current limitation	>120 % of Iout max., constant current
Short circuit protection	indefinite
Capacitive load	single output models: 470 µF max. dual output models: 220 µF max.

General Specifications


Temperature ranges	– Operating –25°C to +70°C 5 VDC output models: –25°C to +60°C – Case temperature +95°C max. – Storage –40°C to +125°C
Derating	3 %/K above +70°C
Humidity (non condensing)	95 % rel H max.
Reliability, calculated MTBF (MIL-HDBK-217F, at +25°C, ground benign)	>800'000 Mio. h
Isolation voltage (60 sec.)	– Input/Output 1'000 VDC
Isolation capacitance	– Input/Output 100 pF typ.
Isolation resistance	– Input/Output (500 VDC) >1'000 M Ohm
Switching frequency	80 kHz typ. (Pulse frequency modulation PFM)
Safety standards	cUL/UL 60950-1, IEC/EN 60950-1
Environmental compliance	– Reach www.tracopower.com/info/reach-declaration.pdf – RoHS directive 2011/65/EU

All specifications valid at nominal input voltage, full load and +25°C after warm-up time unless otherwise stated.

Physical Specifications

Casing material	non conductive plastic (UL94V-0 rated)
Weight	12 g (0.42 oz)
Soldering temperature	max. 260°C / 10 sec.

Outline Dimensions mm (inches)

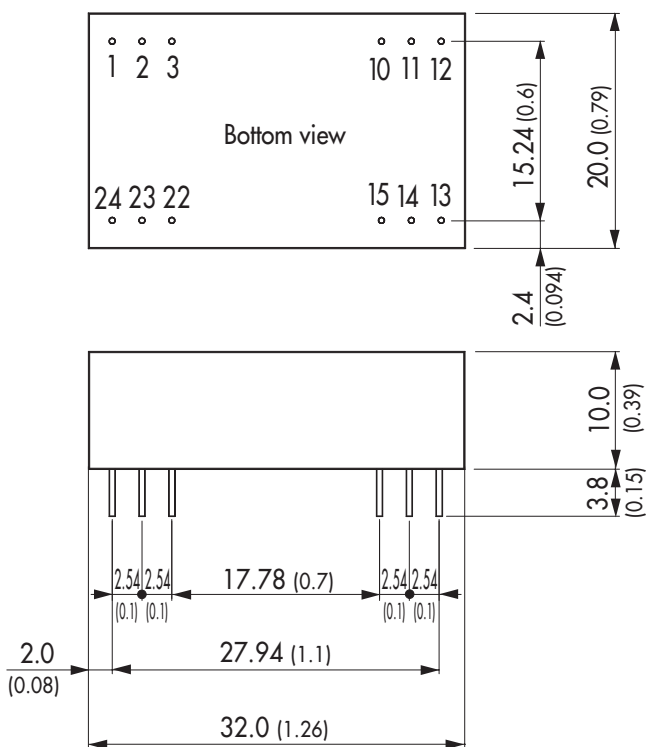

Pin-Out		
Pin	Single	Dual
1	+Vin (Vcc)	+Vin (Vcc)
2	ntd.	-Vout
3	ntc.	Common
10	-Vout	Common
11	+Vout	+Vout
12	-Vin (GND)	-Vin (GND)
13	-Vin (GND)	-Vin (GND)
14	+Vout	+Vout
15	-Vout	Common
22	ntc.	Common
23	ntc.	-Vout
24	+Vin (Vcc)	+Vin (Vcc)

ntc. = not to connect

Pin diameter $\varnothing 0.5 \pm 0.05$ (0.02) ± 0.002
Tolerances ± 0.5 (± 0.02)

Specifications can be changed any time without notice.

Specifications can be changed without notice! Make sure you are using the latest documentation, downloadable at www.tracopower.com

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TRACO Power:

[TEM 2-0522](#) [TEM 2-1222](#) [TEM 2-2421](#) [TEM 2-2411](#) [TEM 2-2422](#) [TEM 2-0511](#) [TEM 2-0521](#) [TEM 2-1211](#) [TEM 2-2412](#) [TEM 2-1212](#) [TEM 2-0512](#) [TEM 2-1221](#)