


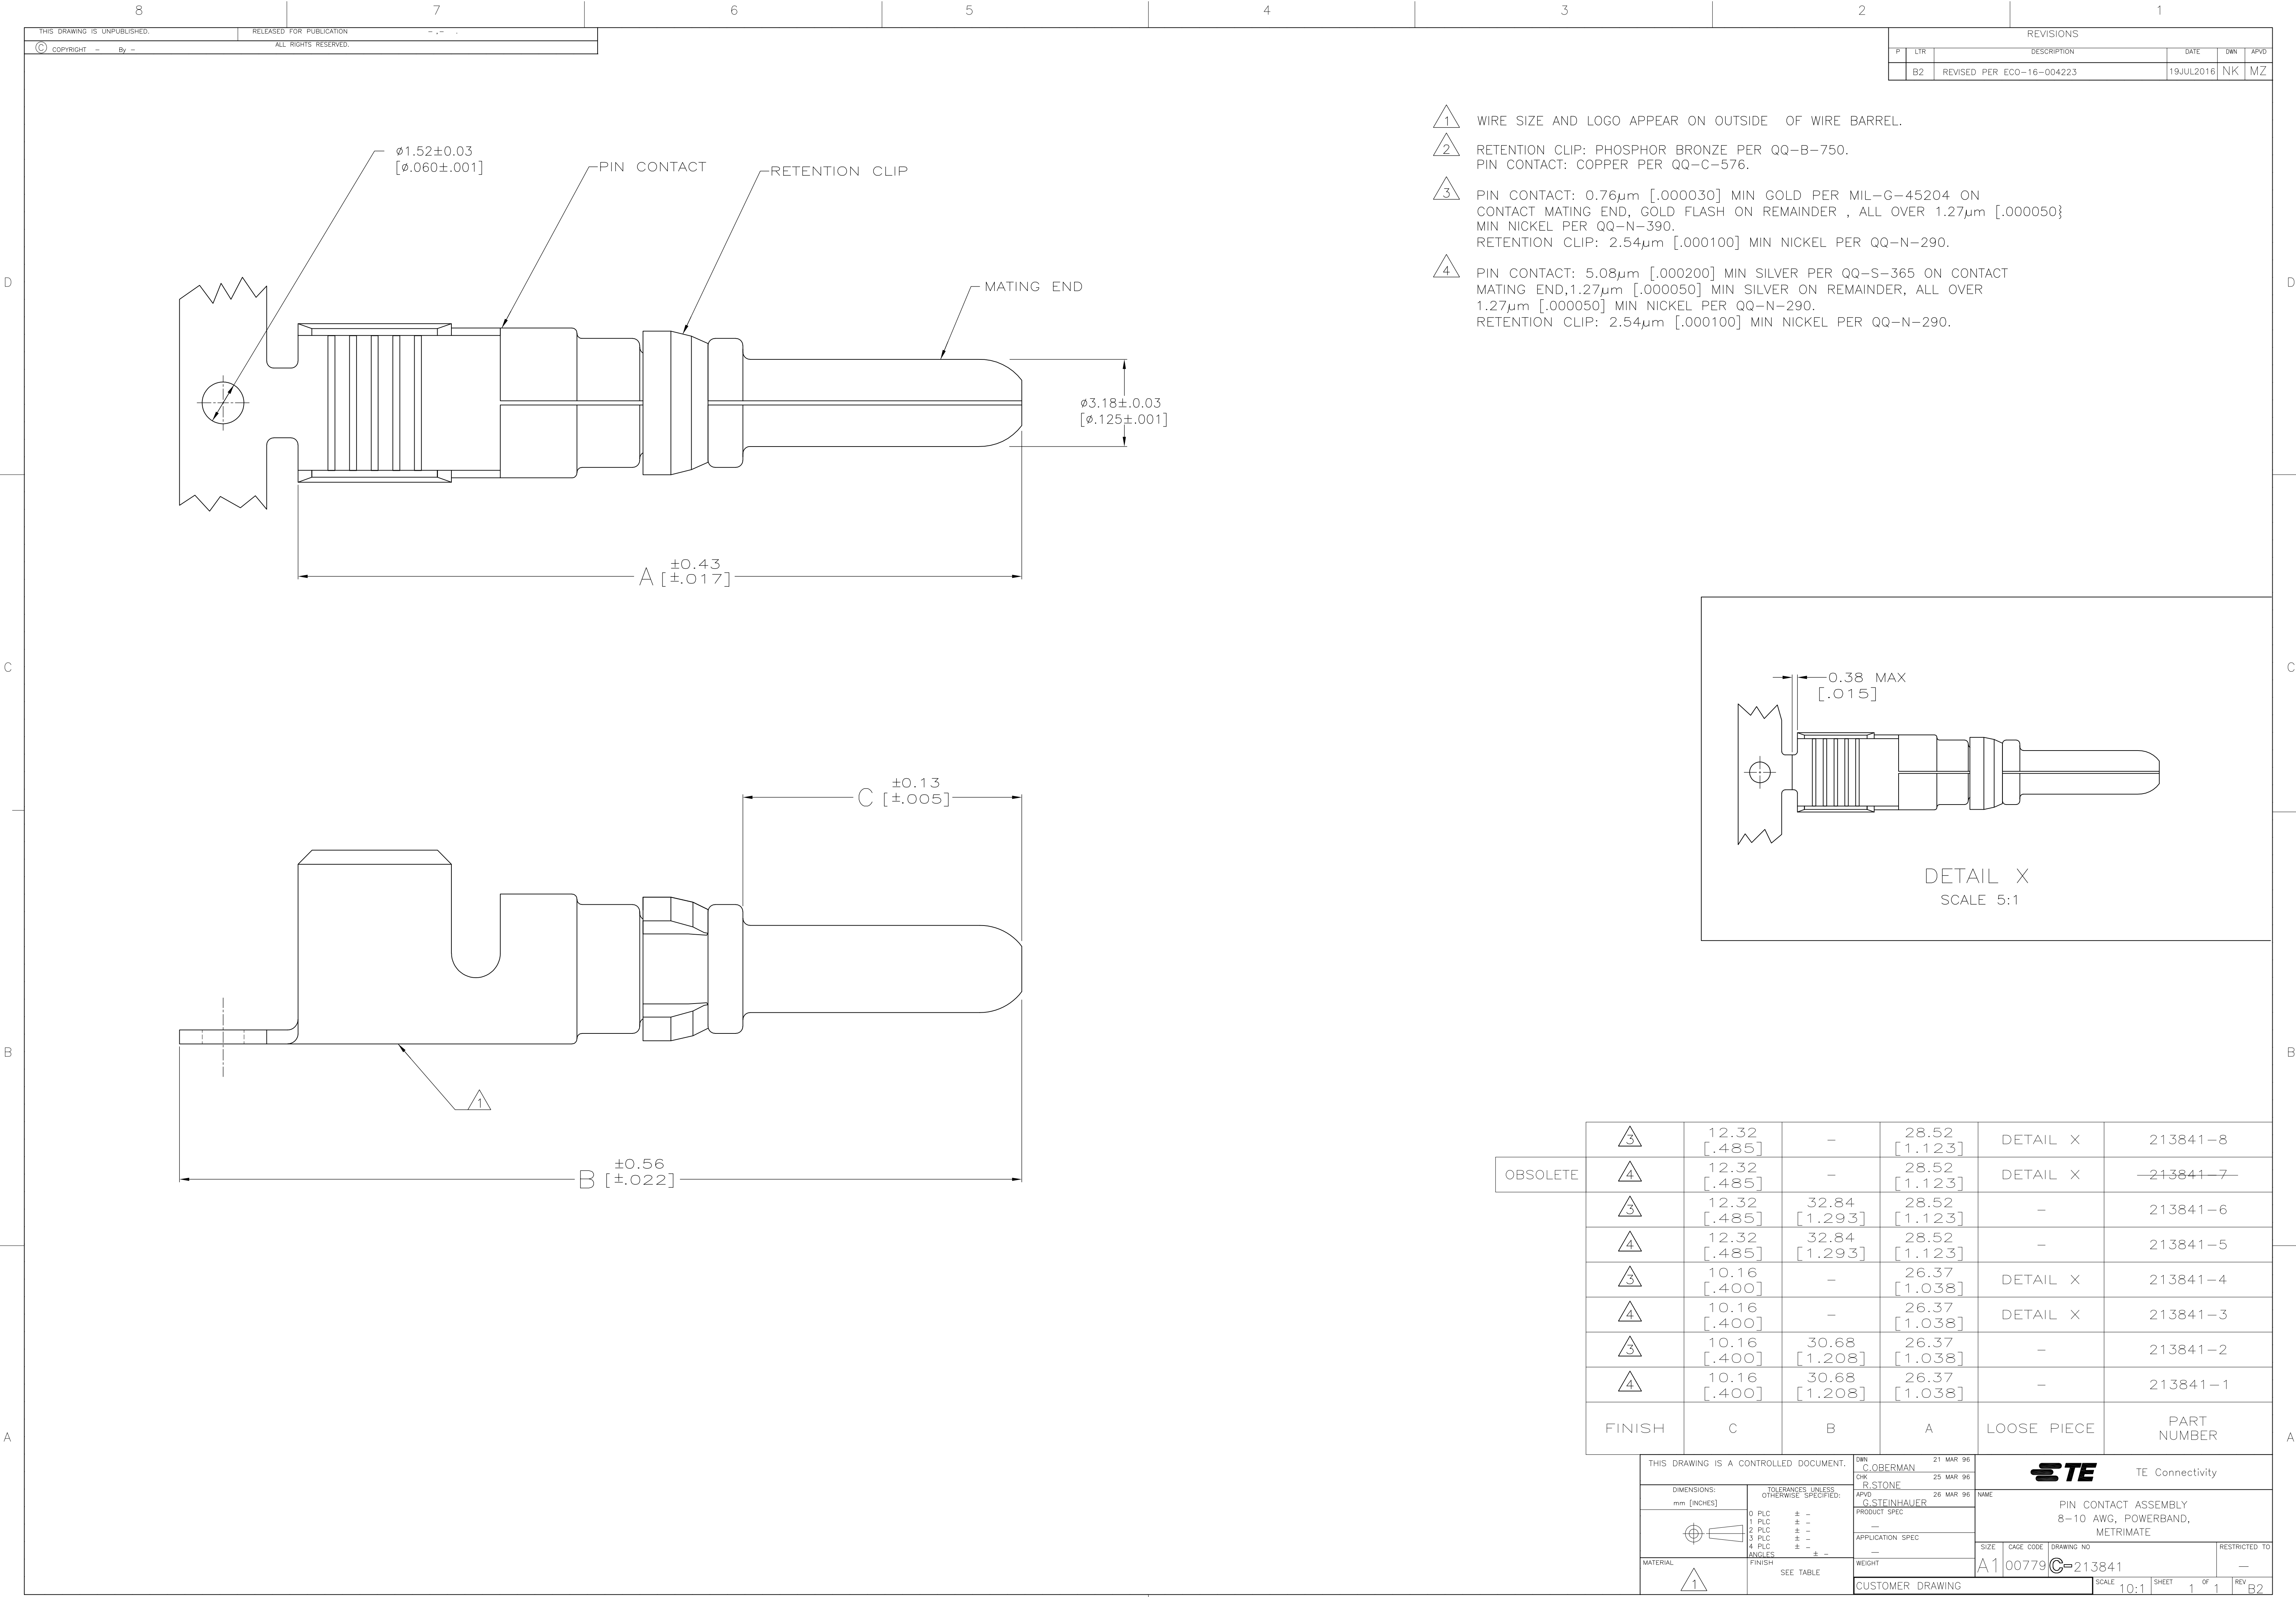

- 1 WIRE SIZE AND LOGO APPEAR ON OUTSIDE OF WIRE BARREL.
- 2 RETENTION CLIP: PHOSPHOR BRONZE PER QQ-B-750.
PIN CONTACT: COPPER PER QQ-C-576.
- 3 PIN CONTACT: $0.76\mu\text{m}$ [$.000030$] MIN GOLD PER MIL-G-45204 ON CONTACT MATING END, GOLD FLASH ON REMAINDER , ALL OVER $1.27\mu\text{m}$ [$.000050$] MIN NICKEL PER QQ-N-390.
RETENTION CLIP: $2.54\mu\text{m}$ [$.000100$] MIN NICKEL PER QQ-N-290.
- 4 PIN CONTACT: $5.08\mu\text{m}$ [$.000200$] MIN SILVER PER QQ-S-365 ON CONTACT MATING END, $1.27\mu\text{m}$ [$.000050$] MIN SILVER ON REMAINDER, ALL OVER $1.27\mu\text{m}$ [$.000050$] MIN NICKEL PER QQ-N-290.
RETENTION CLIP: $2.54\mu\text{m}$ [$.000100$] MIN NICKEL PER QQ-N-290.

OBSOLETE		12.32 [.485]	—	28.52 [1.123]	DETAIL X	213841-8
		12.32 [.485]	—	28.52 [1.123]	DETAIL X	213841-7
		12.32 [.485]	32.84 [1.293]	28.52 [1.123]	—	213841-6
		12.32 [.485]	32.84 [1.293]	28.52 [1.123]	—	213841-5
		10.16 [.400]	—	26.37 [1.038]	DETAIL X	213841-4
		10.16 [.400]	—	26.37 [1.038]	DETAIL X	213841-3
		10.16 [.400]	30.68 [1.208]	26.37 [1.038]	—	213841-2
		10.16 [.400]	30.68 [1.208]	26.37 [1.038]	—	213841-1
FINISH		C	B	A	LOOSE PIECE	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN C. OBERMAN 21 MAR 96	TE Connectivity		
DIMENSIONS: mm [INCHES]		CHK R. STONE 25 MAR 96			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPROV G. STEINHÄUER 26 MAR 96	NAME		
0 PLC ± — 1 PLC ± — 2 PLC ± — 3 PLC ± — 4 PLC ± — ANGLES ± — ± —		PRODUCT SPEC	PIN CONTACT ASSEMBLY 8-10 AWG, POWERBAND, METRIMATE		
MATERIAL		APPLICATION SPEC	SIZE		
SEE TABLE		WEIGHT	CAGE CODE		
1		CUSTOMER DRAWING	DRAWING NO		
			A1 00779		
			RESTRICTED TO		
			SCALE 10:1		
			SHEET 1 OF 1		
			REV B2		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[213841-7](#)