


LOC		DIST		REVISIONS				
P	LTR	DESCRIPTION			DATE	DWN	APVD	
	C	REVISED PER ECR-16-003314			15JUL2016	BW	GJ	

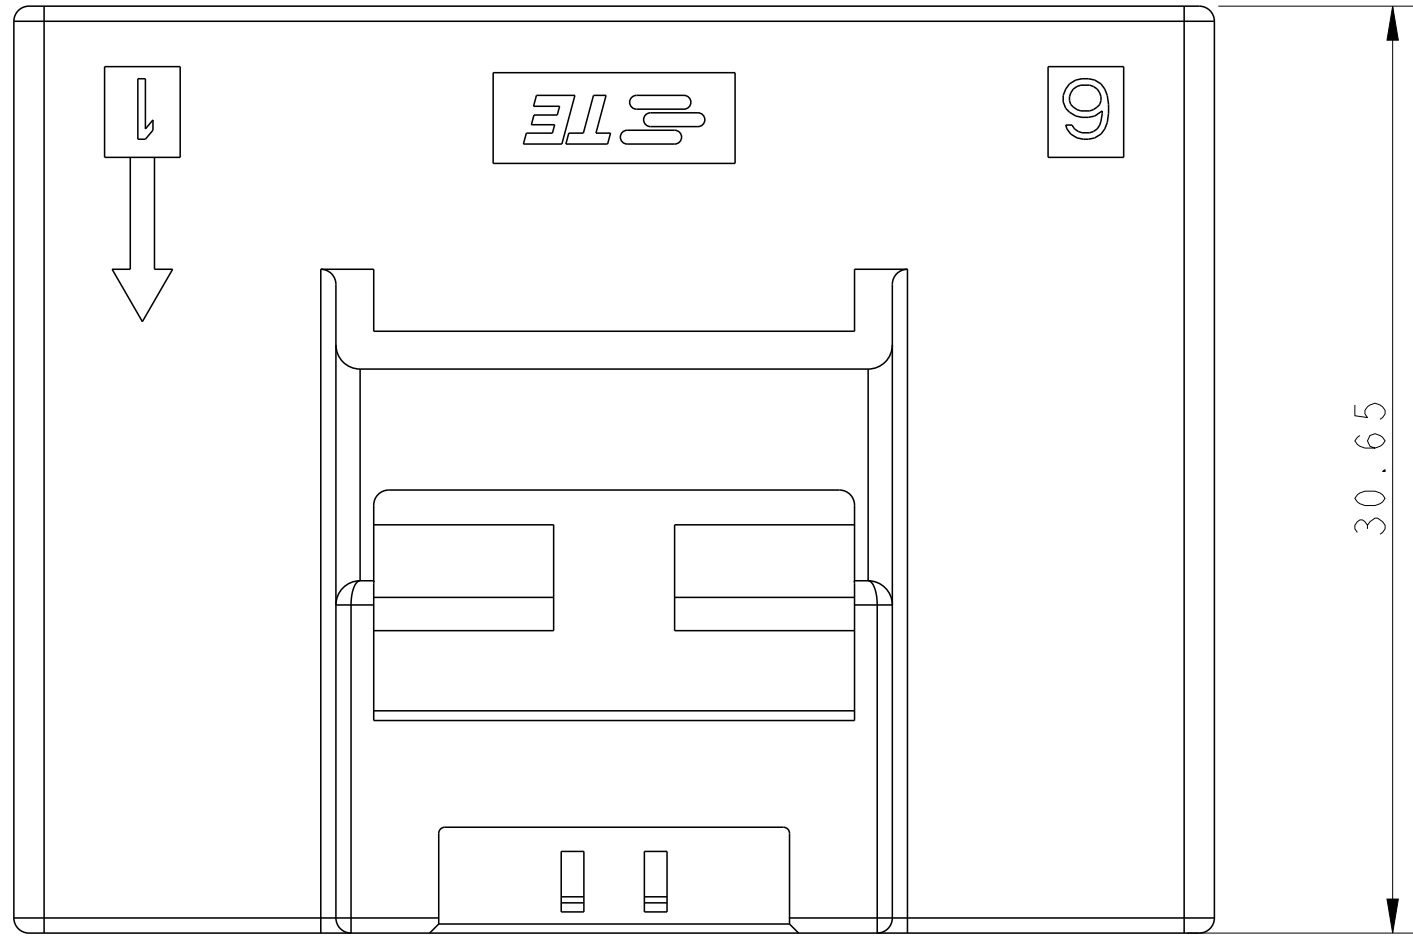

△ MATERIAL:
LEVEL 1:PBT, STANDARD TEMPERATURE 105°C
KEY A:NATURAL; KEY B:PURPLE; KEY C:BLUE; KEY D:YELLOW





LEVEL 2:NYLON, HIGH TEMPERATURE 150°C
KEY A:LIGHT GREY; KEY B:RED; KEY C:BLACK; KEY D:NATURAL

△ MATERIAL MARK:
LEVEL 1:PBT, LEVEL 2:HDT


3 APPLICABLE CONTACT P/N
TAB CONTACT:1971238/1971780/82/84/86/88-*,2238067-*

4 MATING CONN, P/N
PLUG HSG:*-1971776-
TPA(LOCK PLATE):*-1971778-*



5 THIS PRODUCT HAS NOT COMPLETED VALIDATION TESTING

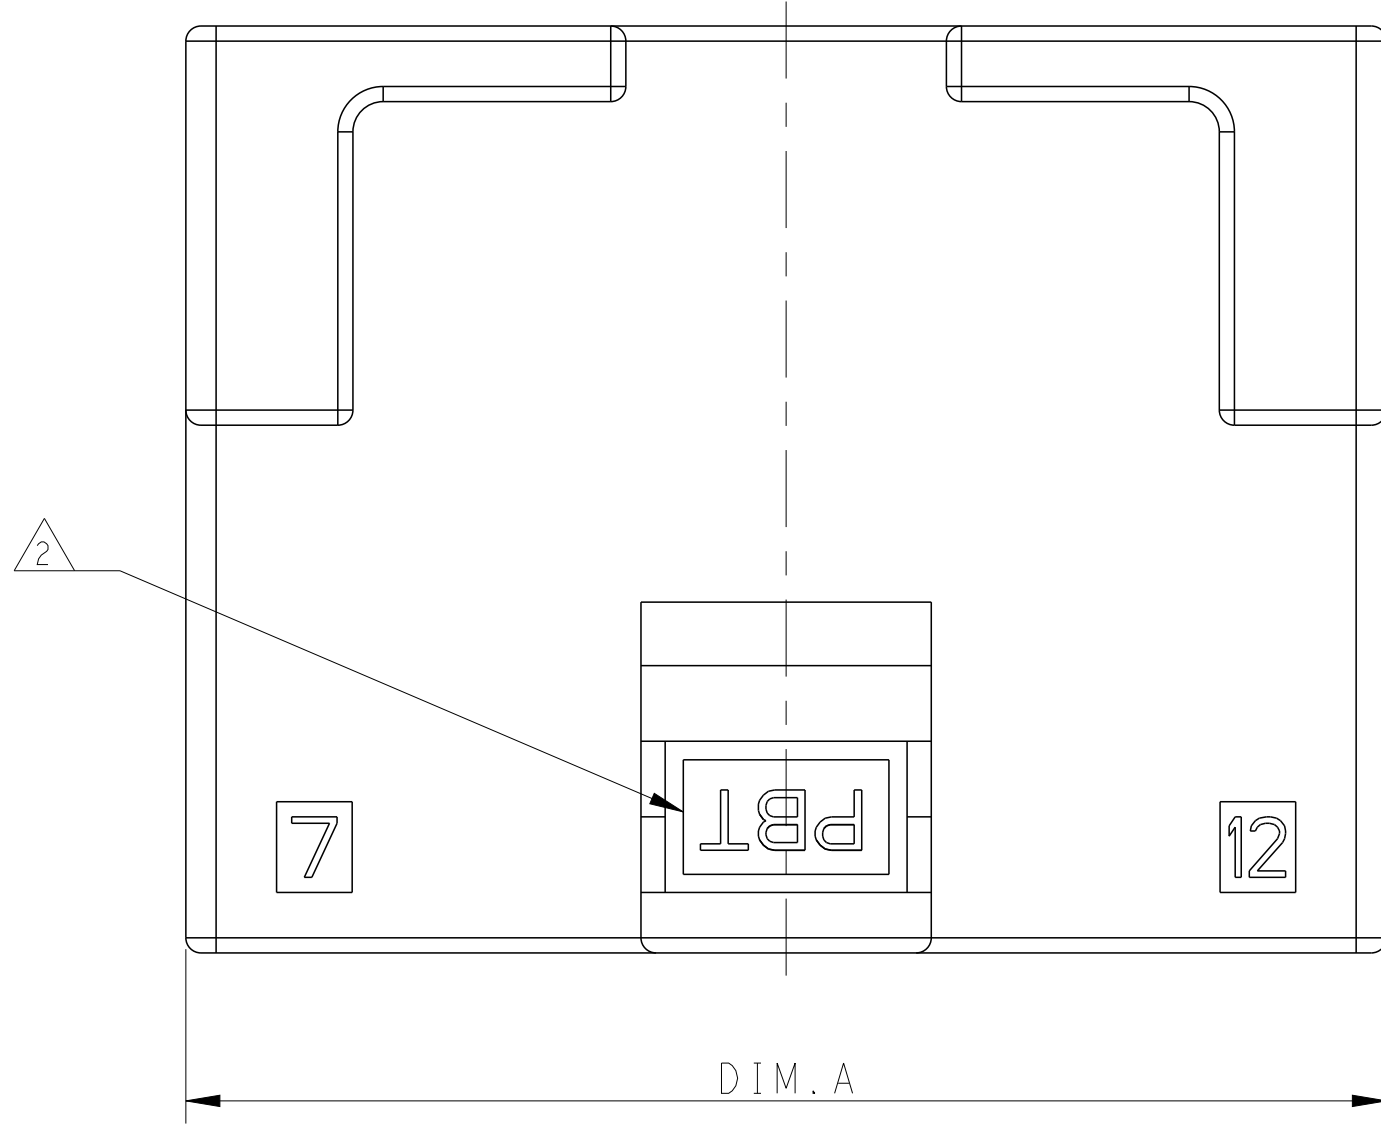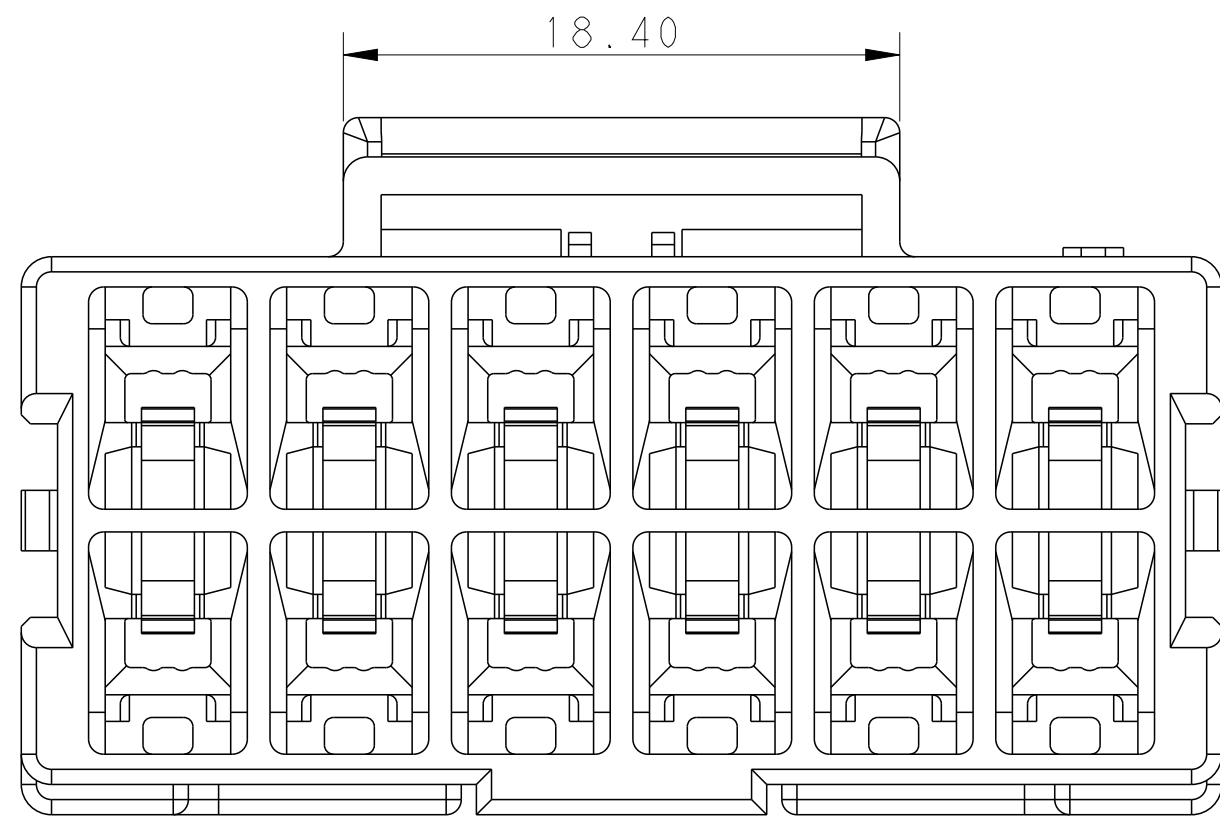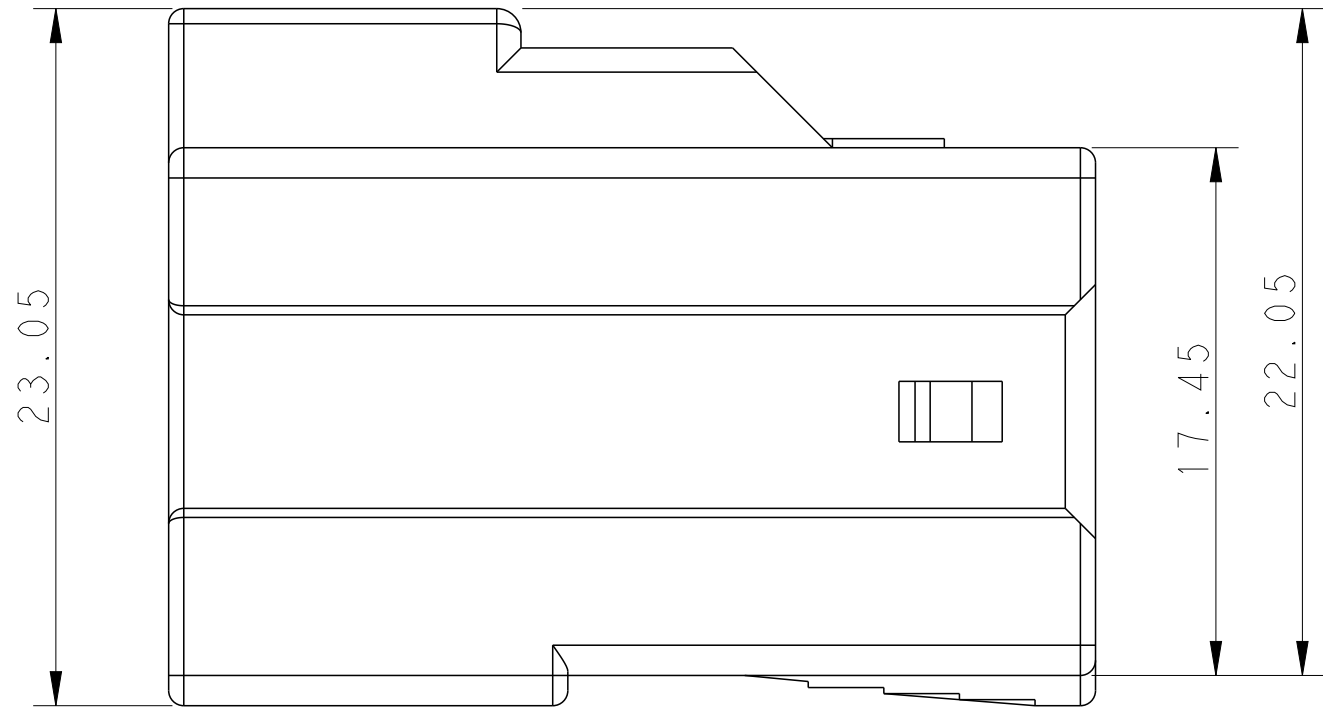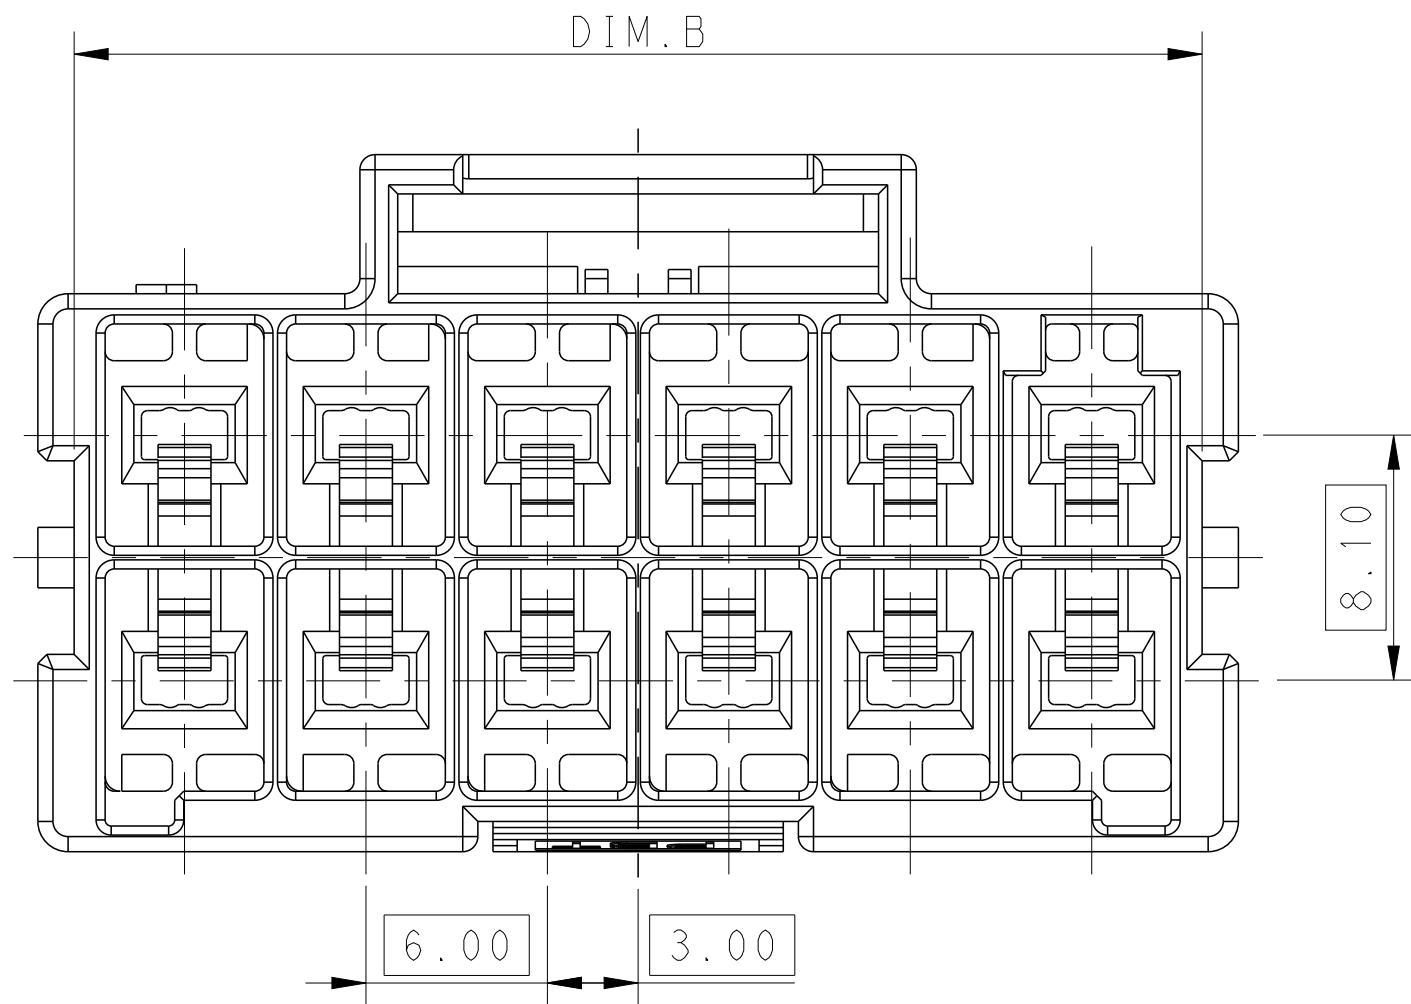



POS.	DIM.A	DIM.B
2*6	39.70	37.30
2*5	33.70	31.30
2*4	27.70	25.30
2*3	21.70	19.30

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN TOMMY WU 09JUL2012	 TE Connectivity	
DIMENSIONS:		CHK HAPYE WU 09JUL2012		
mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD YUHONG MAO 09JUL2012	NAME CAP HOUSING,FREE HANGING,DOUBLE ROW POWER TRIPLE LOCK	
		PRODUCT SPEC	SIZE	
	0 PLC ±- 1 PLC ±0.35 2 PLC ±0.25 3 PLC ±- 4 PLC ±- ANGLES ±- FINISH	108-106118	CAGE CODE	
		APPLICATION SPEC	DRAWING NO	
MATERIAL		114-106118	RESTRICTED TO	
		WEIGHT	A100779C=1971774	
Customer Drawing		SCALE	SHEET 1 OF 2	REV C



LOC		DIST		REVISIONS			
P	LYR	DESCRIPTION			DATE	DWN	APVD
-	-	SEE SHEET 1			-	-	-

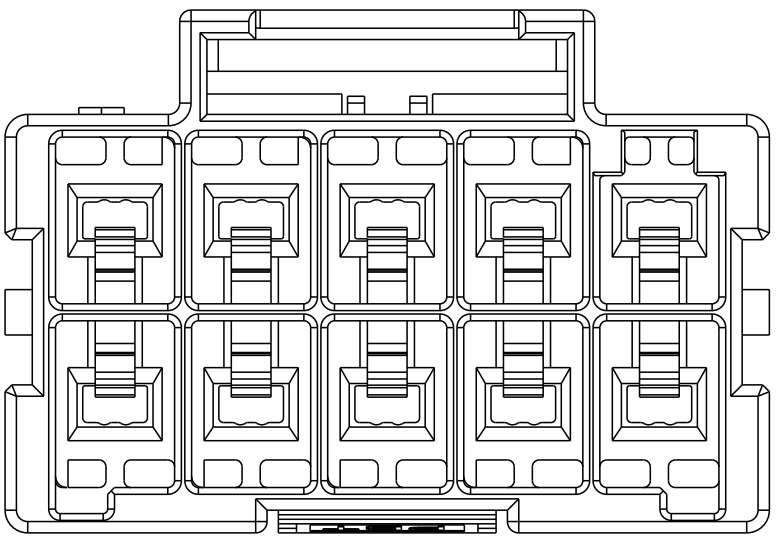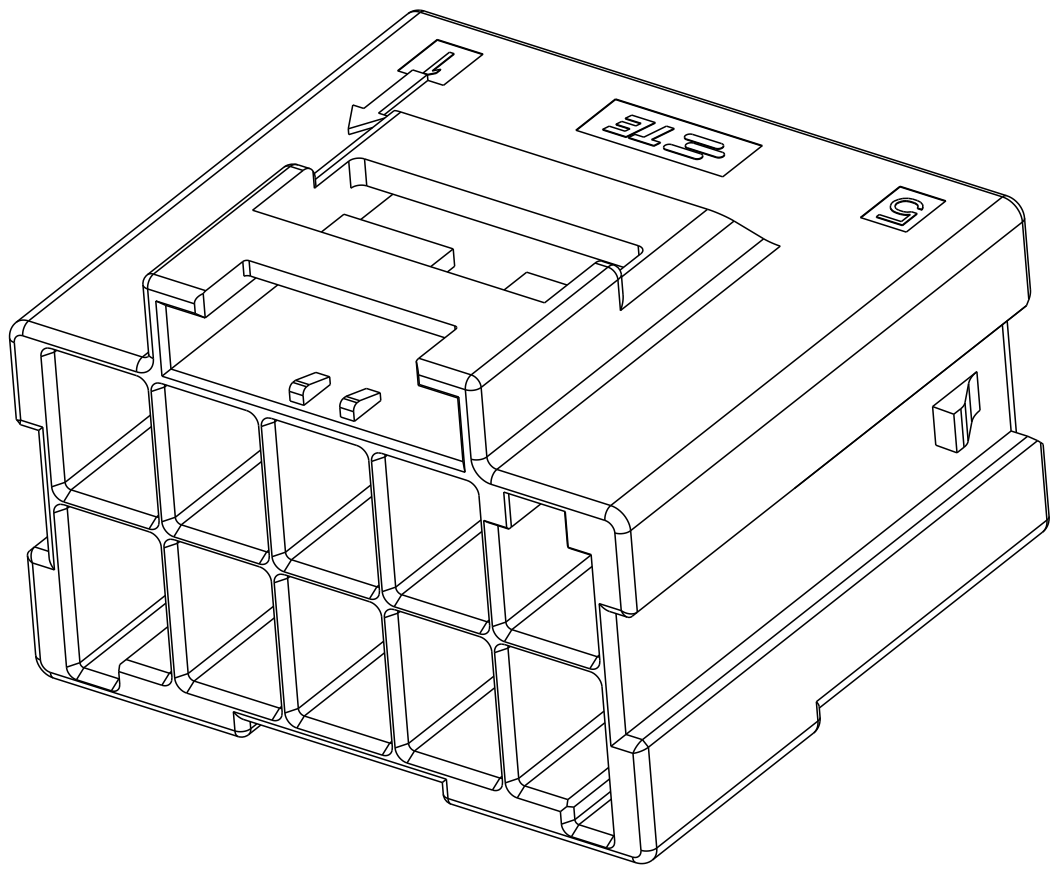


2*5 POSITIONS

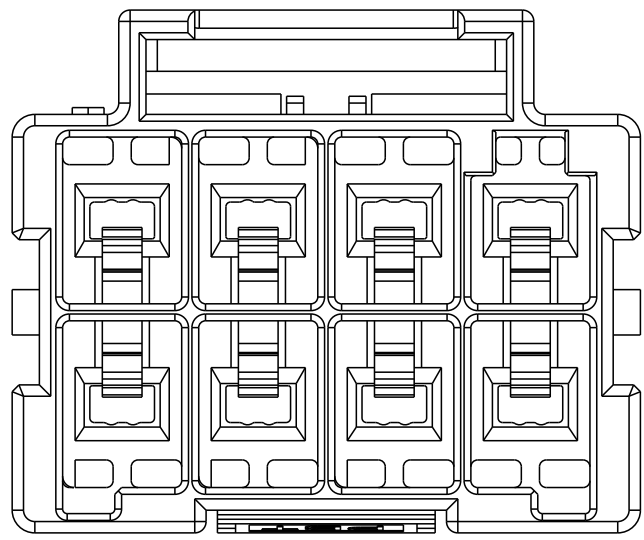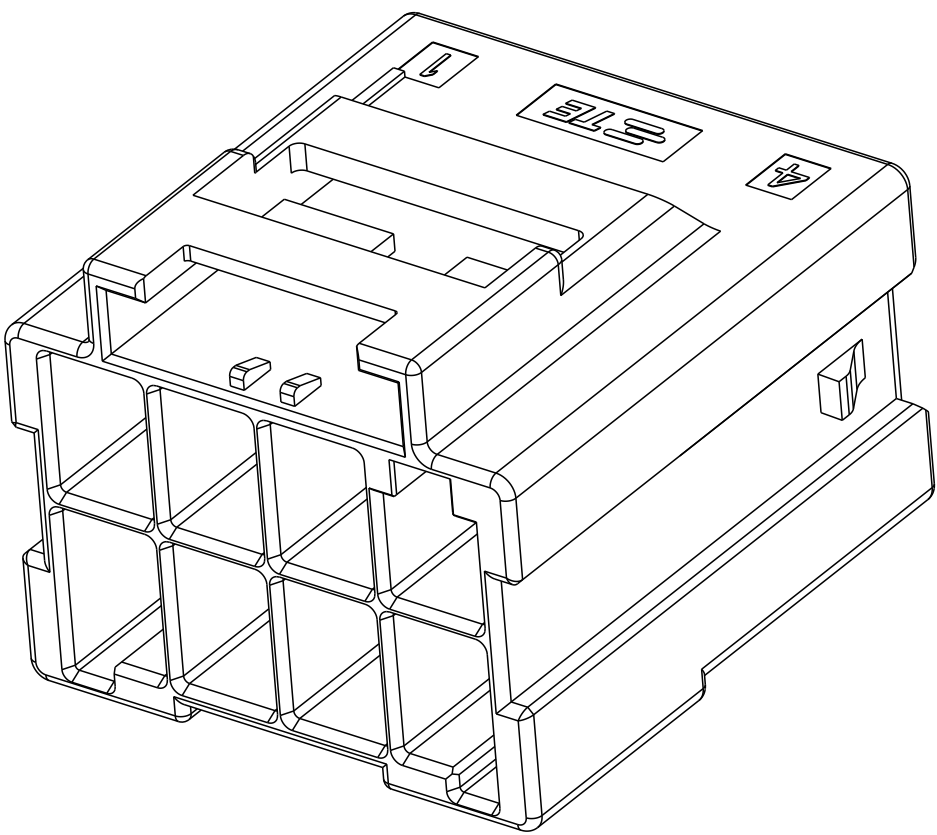


2*4 POSITIONS

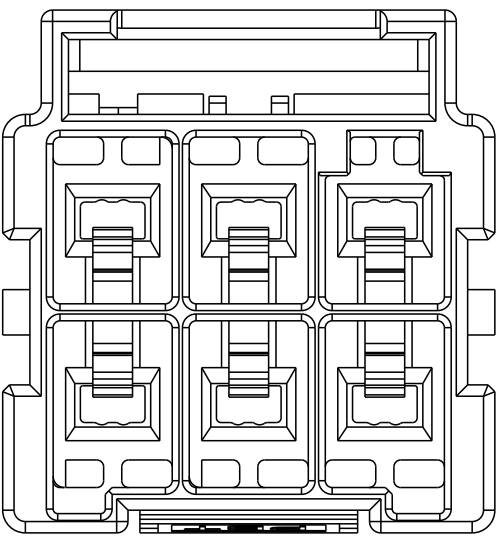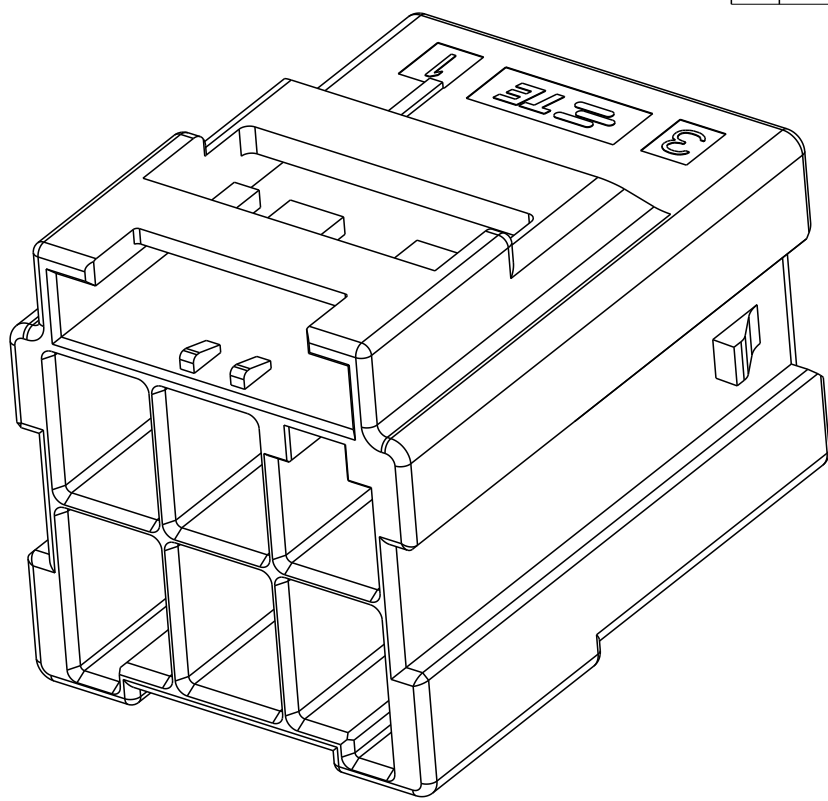


2*3 POSITIONS

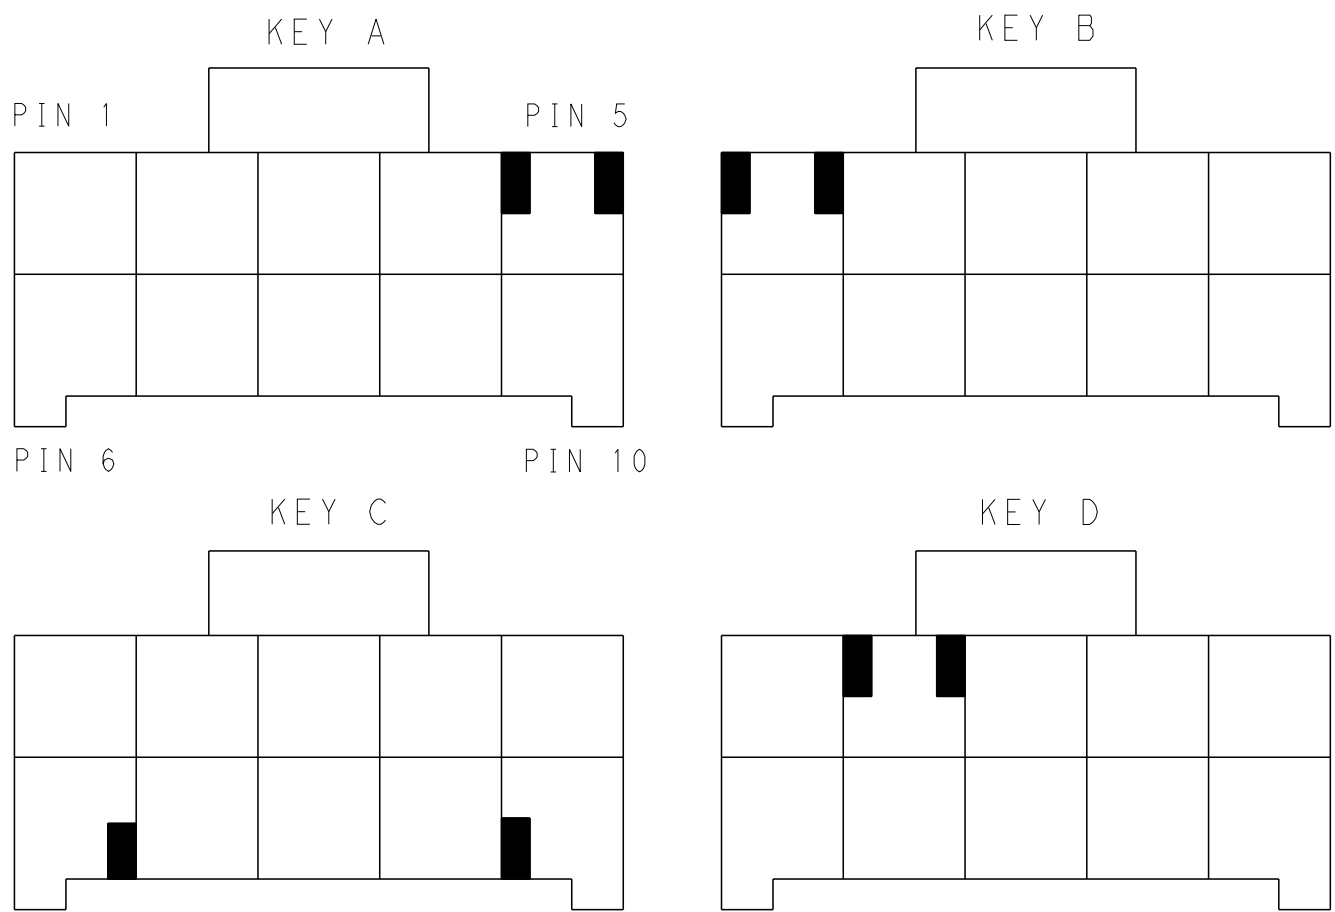



KEYING FOR 2*5 POS.

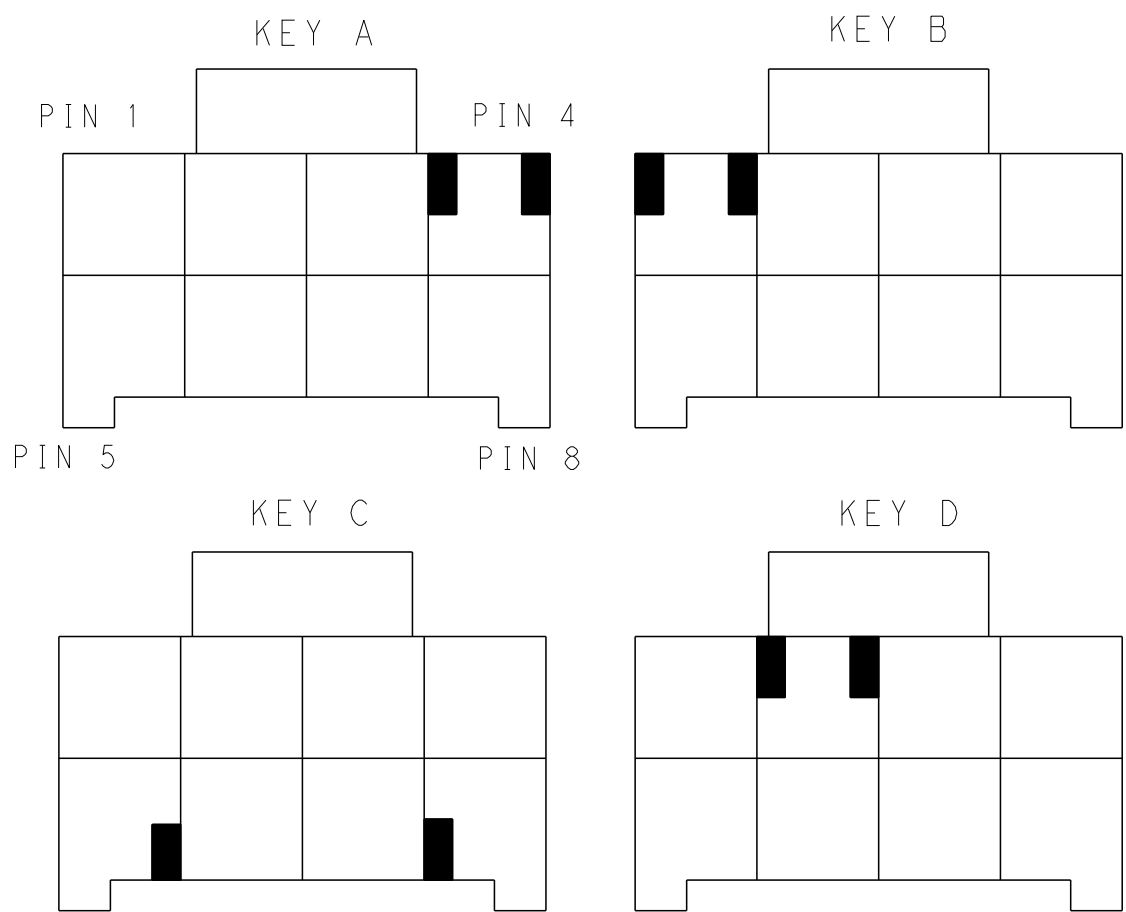


KEYING FOR 2*4 POS.

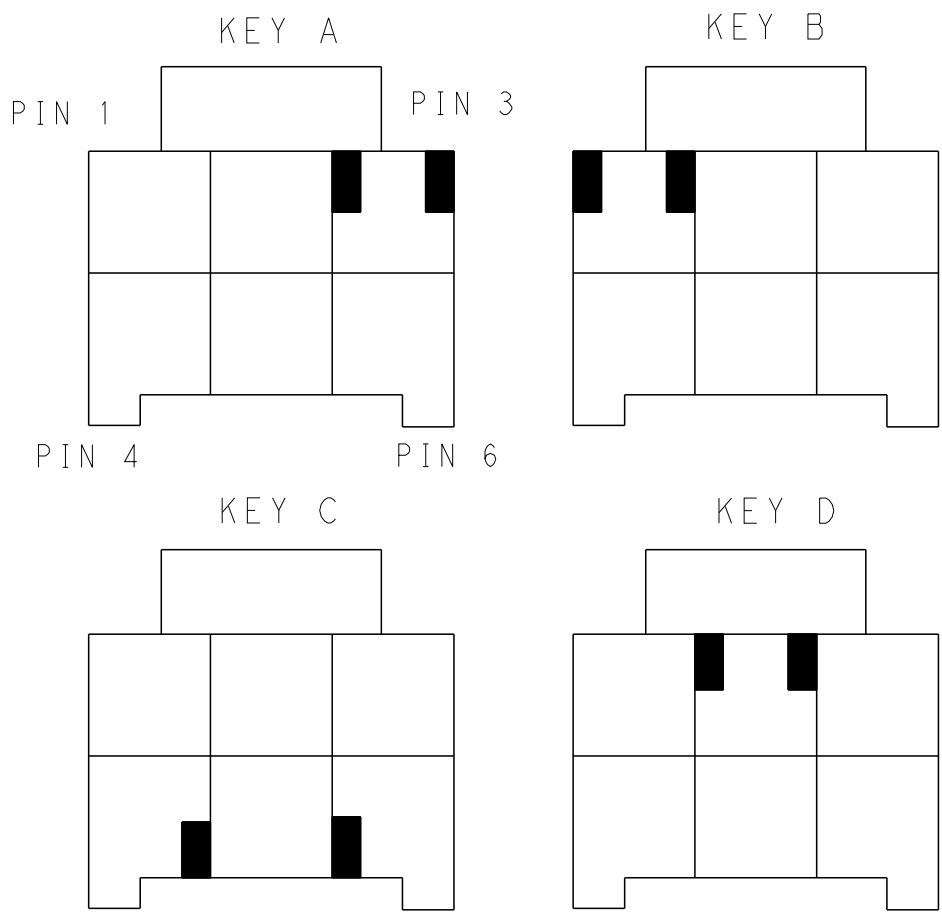

KEYING FOR 2*3 POS.

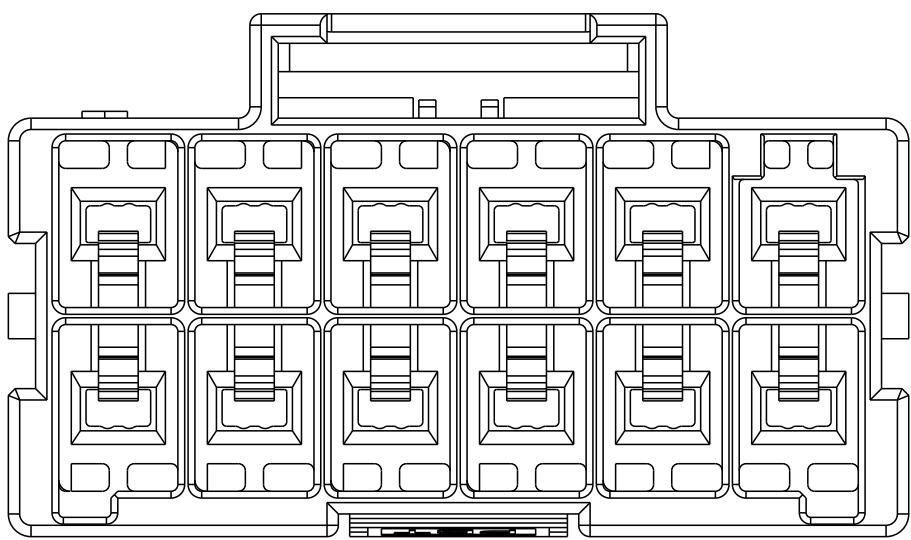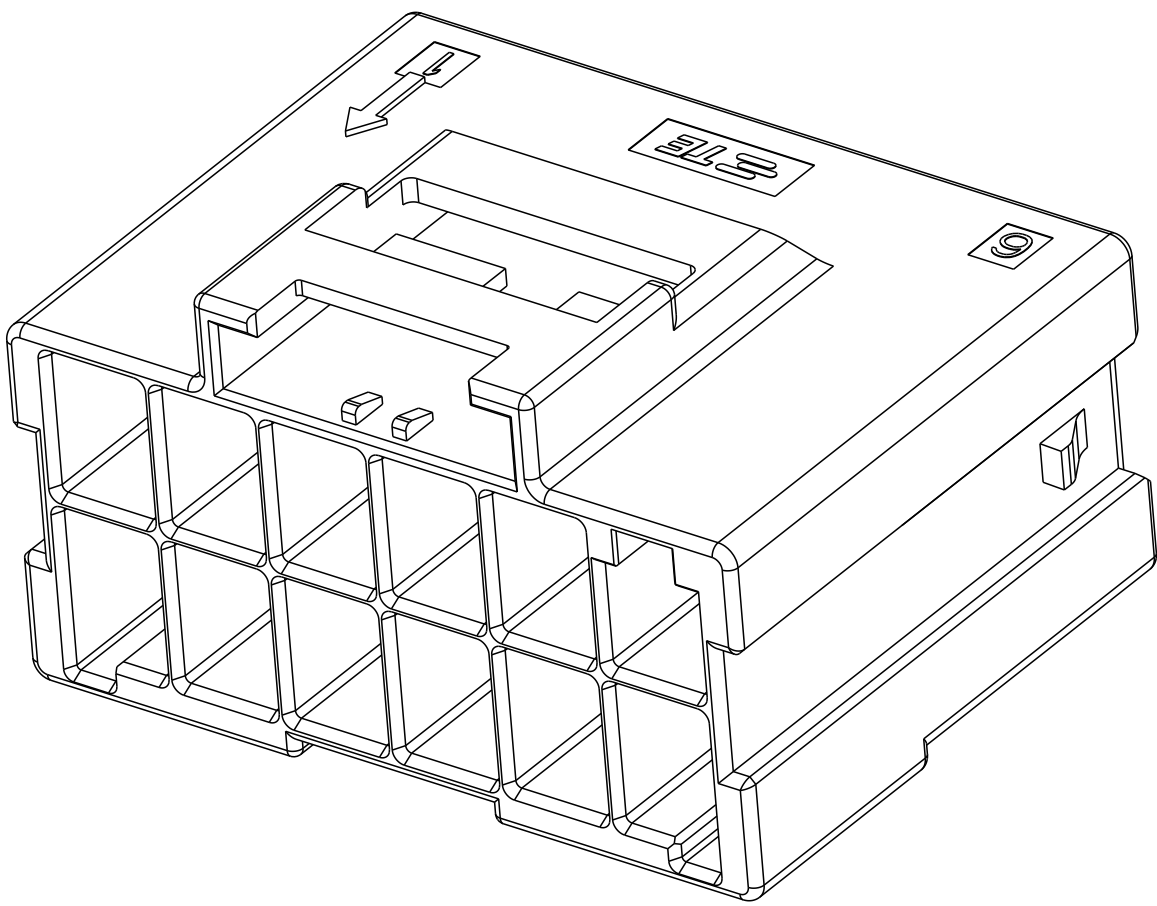

2*6 POSITIONS

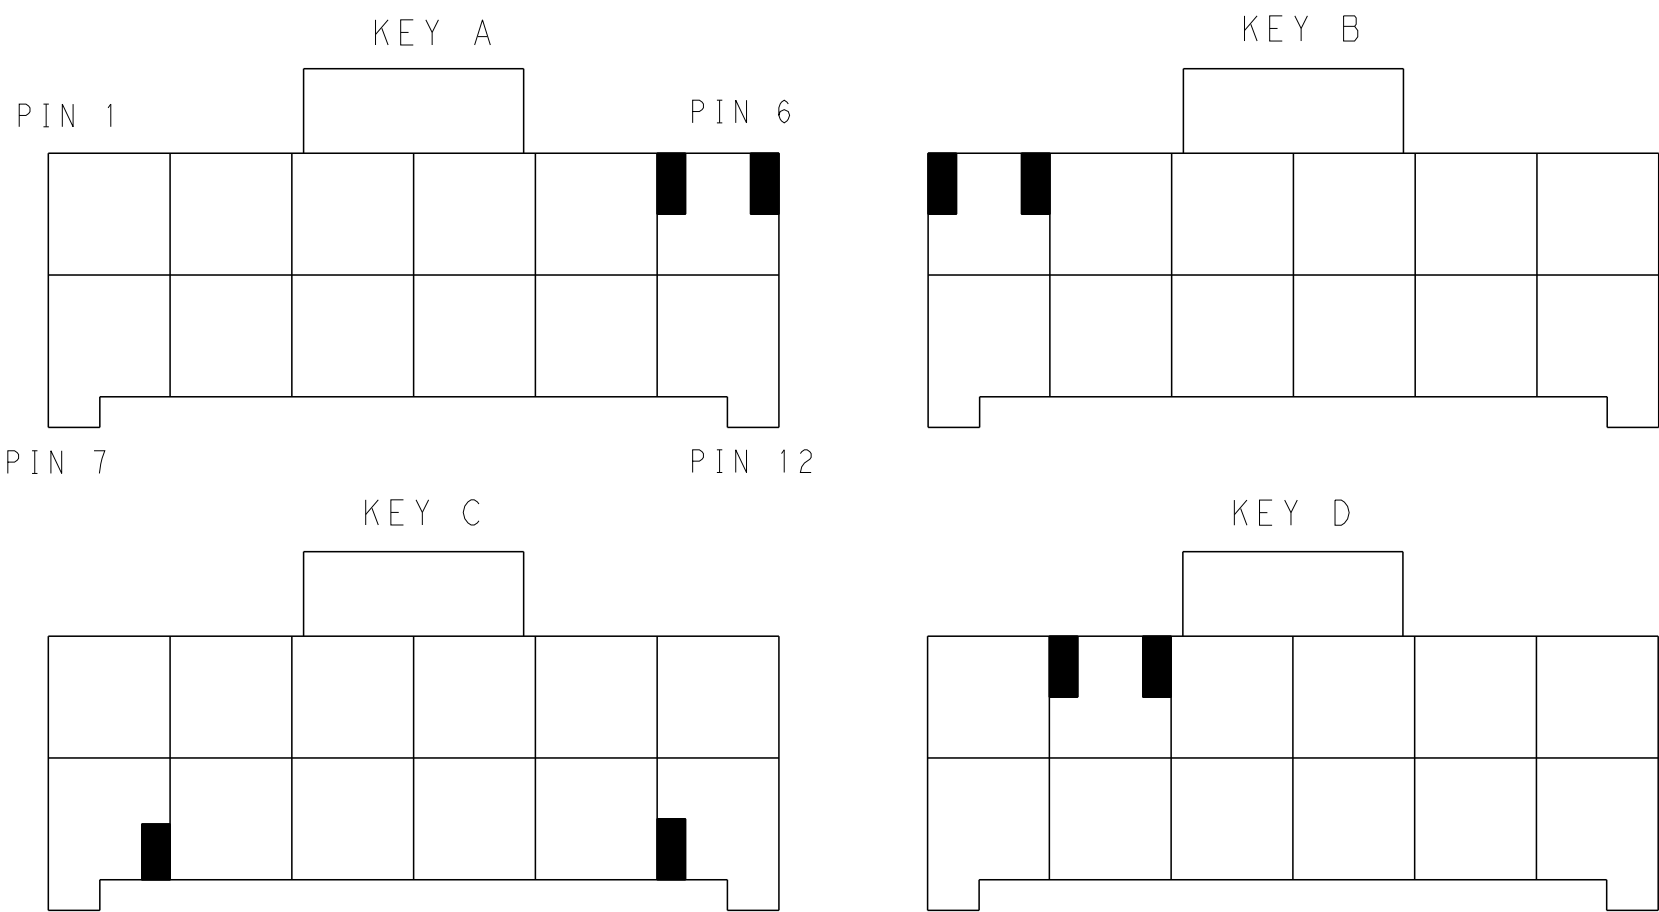

KEYING FOR 2*6 POS.

2*6	LEVEL 1	KEY A	1-1971774-6
		KEY B	2-1971774-6
		KEY C	3-1971774-6
		KEY D	4-1971774-6
2*5	LEVEL 2	KEY A	5-1971774-6
		KEY B	6-1971774-6
		KEY C	7-1971774-6
		KEY D	8-1971774-6
2*4	LEVEL 1	KEY A	1-1971774-5
		KEY B	2-1971774-5
		KEY C	3-1971774-5
		KEY D	4-1971774-5
2*3	LEVEL 2	KEY A	5-1971774-5
		KEY B	6-1971774-5
		KEY C	7-1971774-5
		KEY D	8-1971774-5
POS.	MATERIAL	KEY	P/N

2*6	LEVEL 1	KEY A	1-1971774-4
		KEY B	2-1971774-4
		KEY C	3-1971774-4
		KEY D	4-1971774-4
2*5	LEVEL 2	KEY A	5-1971774-4
		KEY B	6-1971774-4
		KEY C	7-1971774-4
		KEY D	8-1971774-4
2*4	LEVEL 1	KEY A	1-1971774-3
		KEY B	2-1971774-3
		KEY C	3-1971774-3
		KEY D	4-1971774-3
2*3	LEVEL 2	KEY A	5-1971774-3
		KEY B	6-1971774-3
		KEY C	7-1971774-3
		KEY D	8-1971774-3
POS.	MATERIAL	KEY	P/N

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN TOMMY WU 09JUL2012
CHK HAPYE WU 09JUL2012
APVD YUJHONG MAO 09JUL2012

DIMENSIONS:

mm

0 PLC ±0.35
1 PLC ±0.25
2 PLC ±0.25
3 PLC ±0.25
4 PLC ±0.25
ANGLES ±0.25
FINISH -

TOLERANCES UNLESS OTHERWISE SPECIFIED:

±0.35
±0.25
±0.25
±0.25
±0.25
±0.25
±0.25

PRODUCT SPEC

108-106118

APPLICATION SPEC

114-106118

WEIGHT -

Customer Drawing

NAME

TE Connectivity

CAP HOUSING, FREE HANGING, DOUBLE ROW POWER TRIPLE LOCK

SIZE CAGE CODE DRAWING NO

A100779C=1971774

RESTRICTED TO

-

SCALE

-

SHEET 2 OF 2

REV C

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[2-1971774-5](#)