
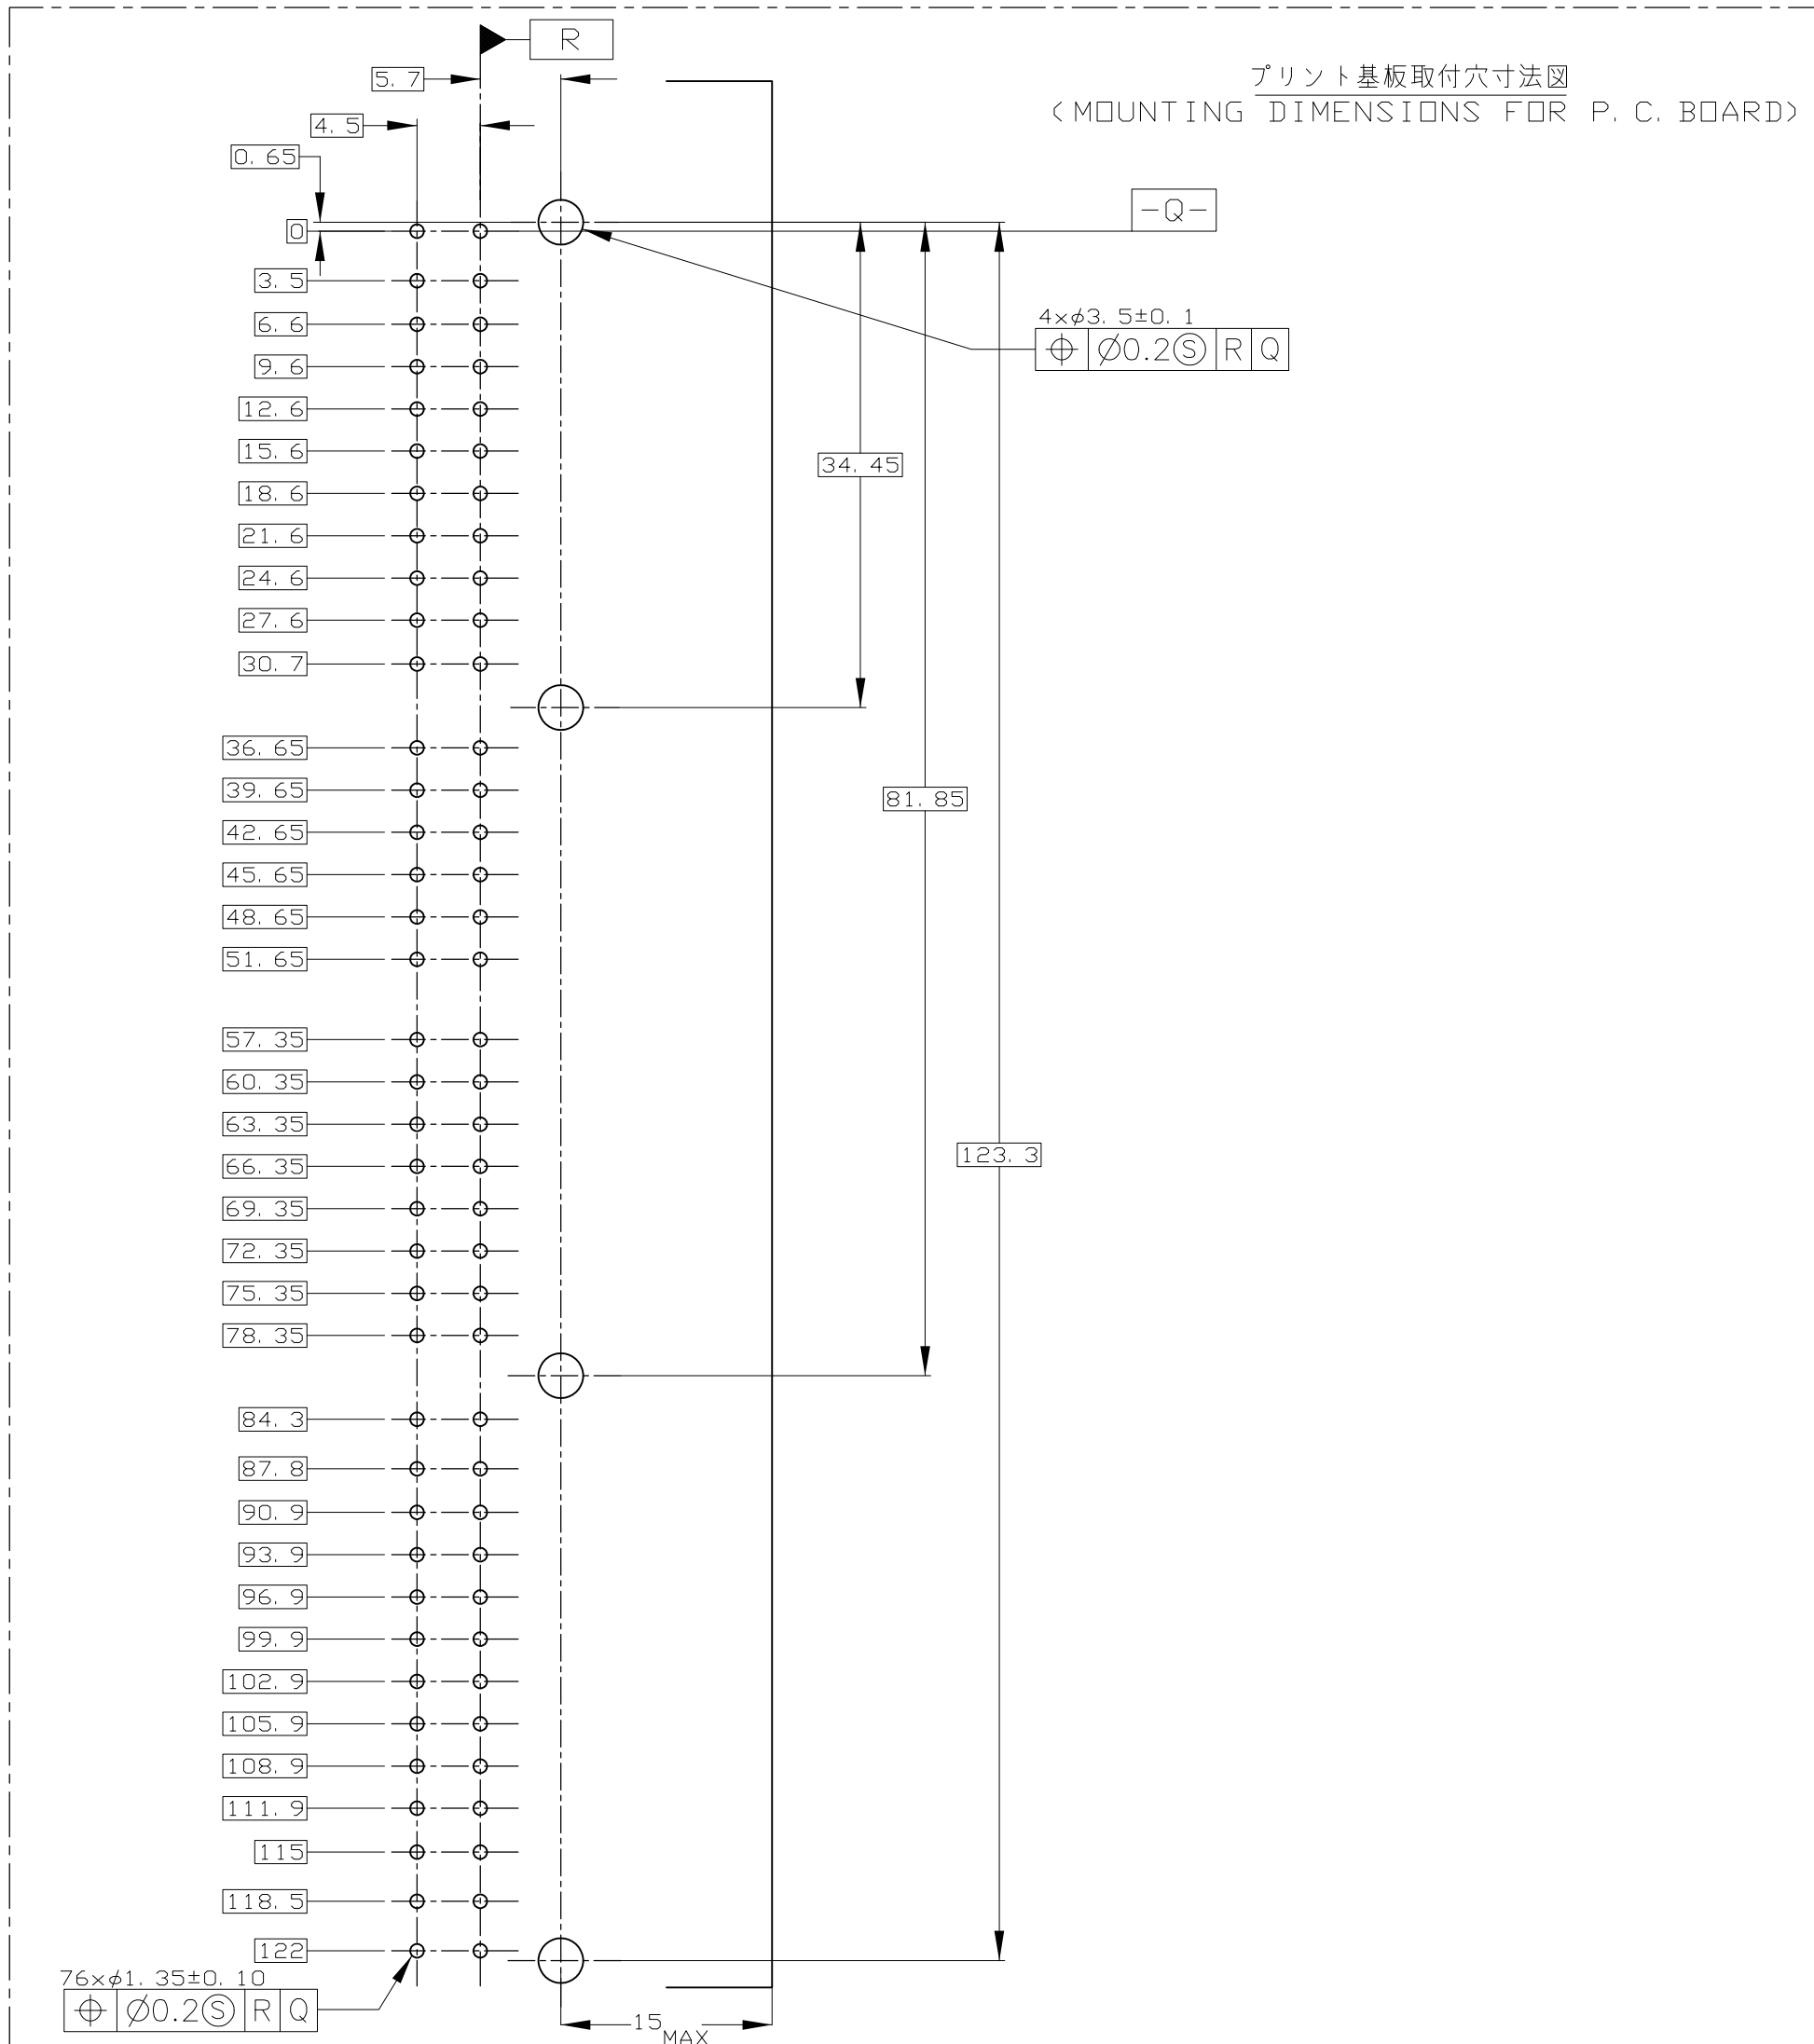
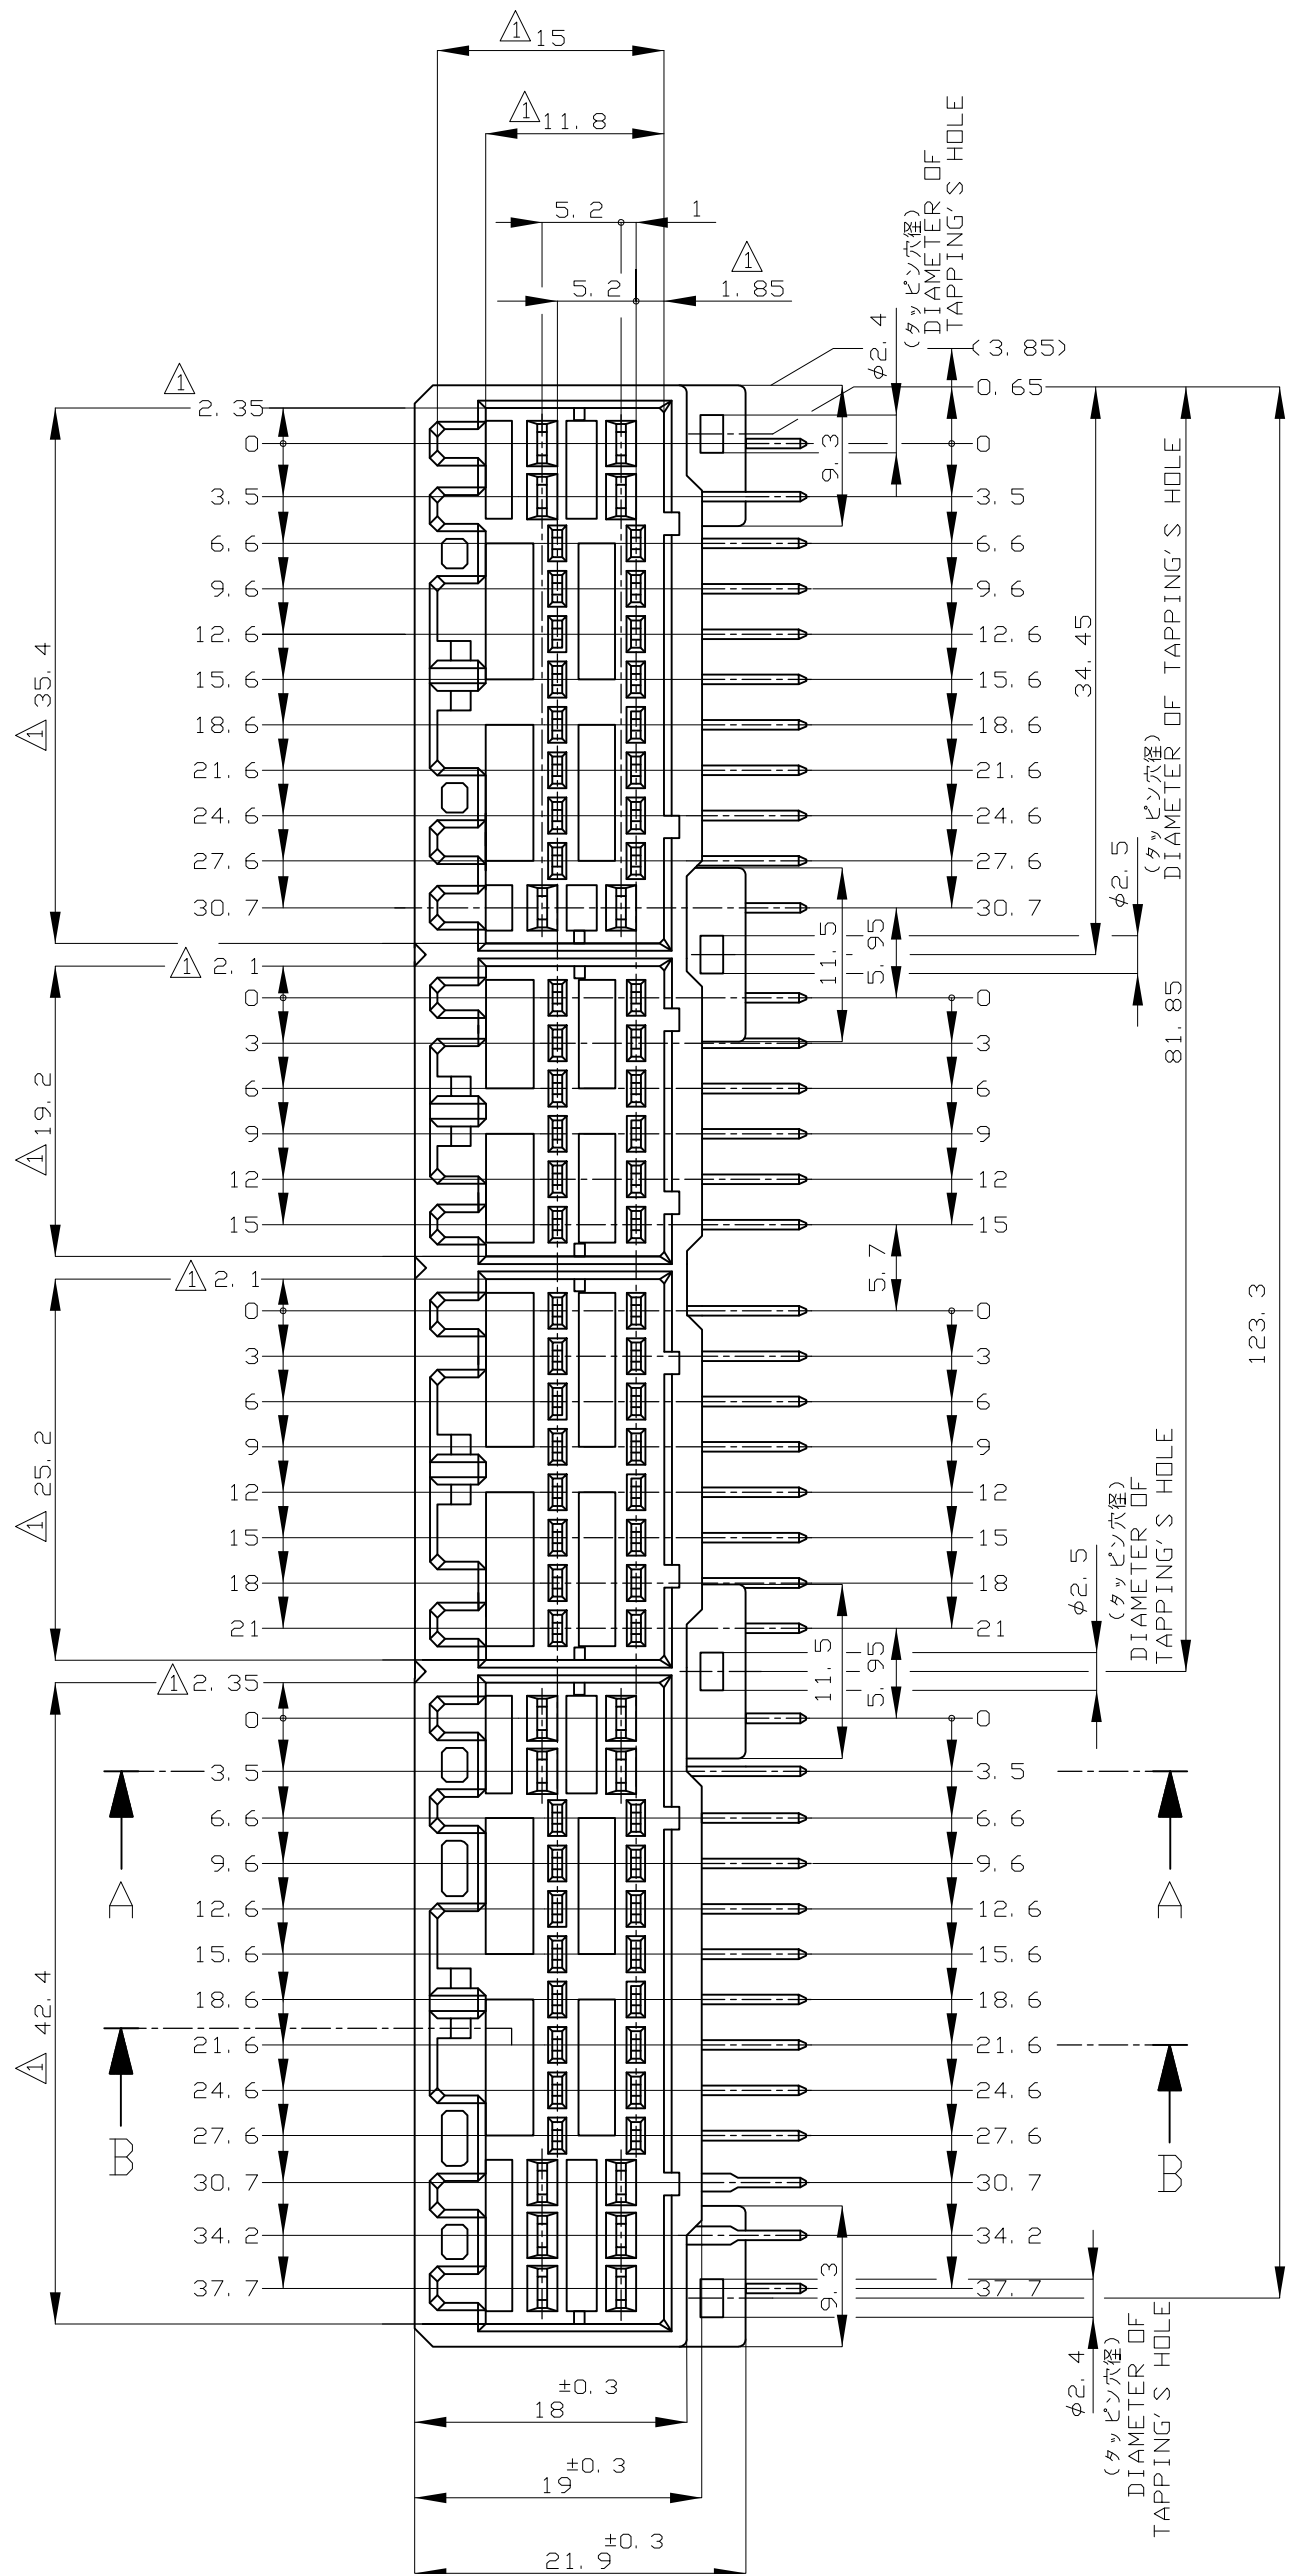
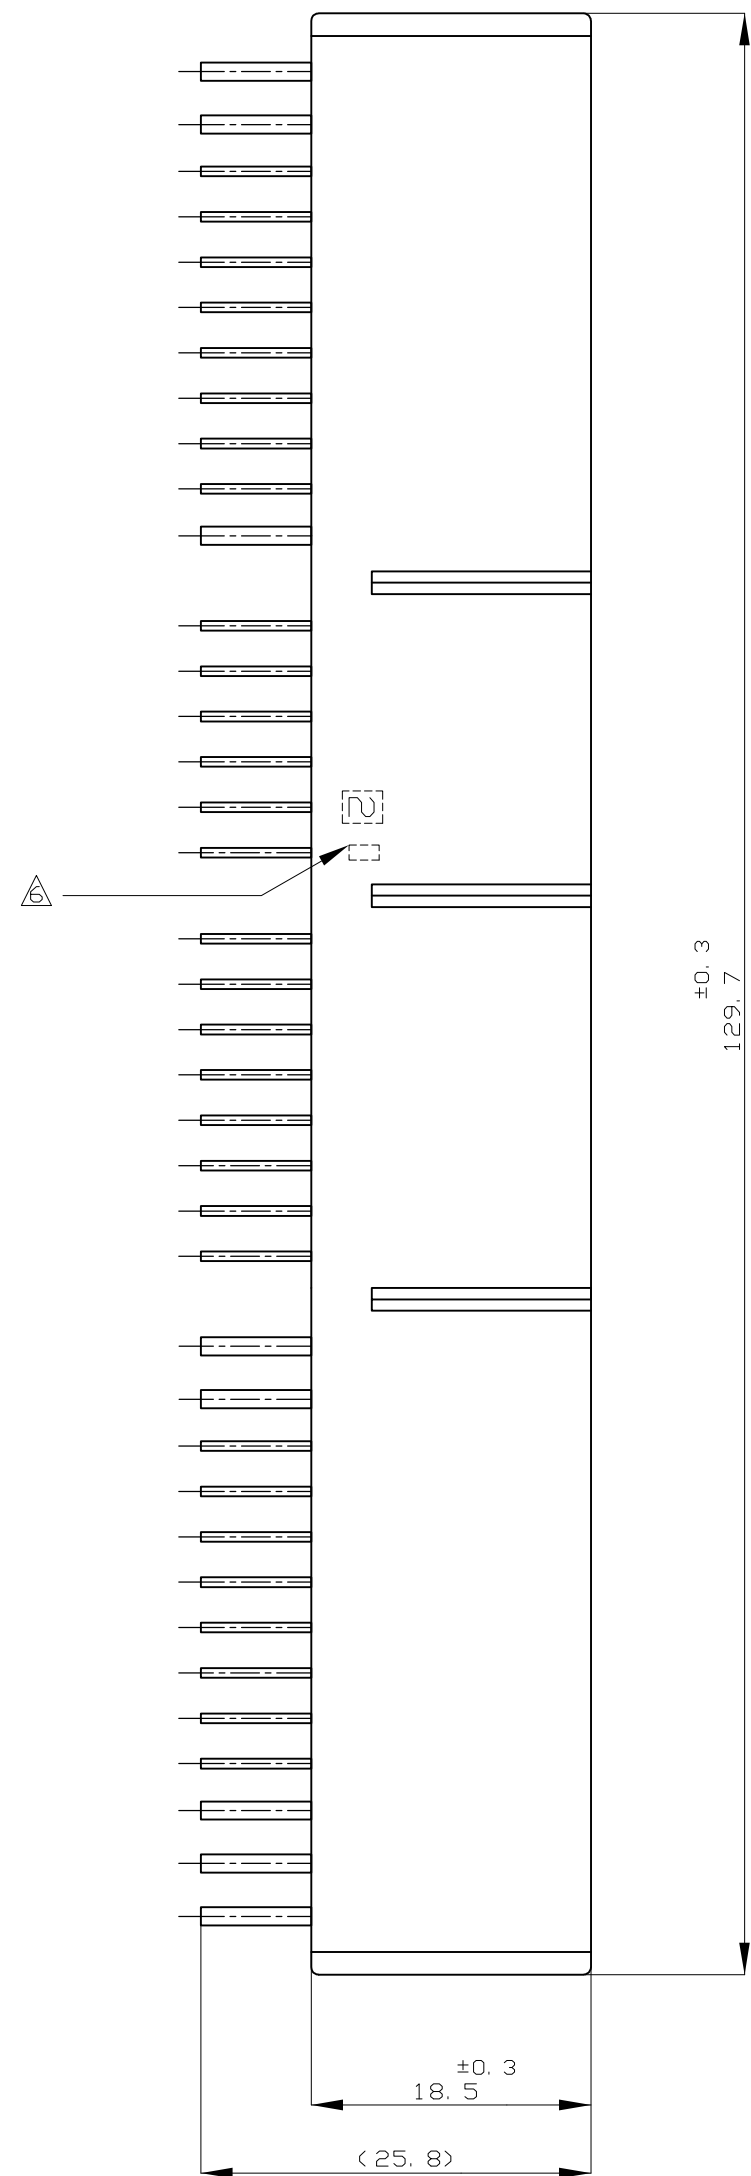


D

C




B

A

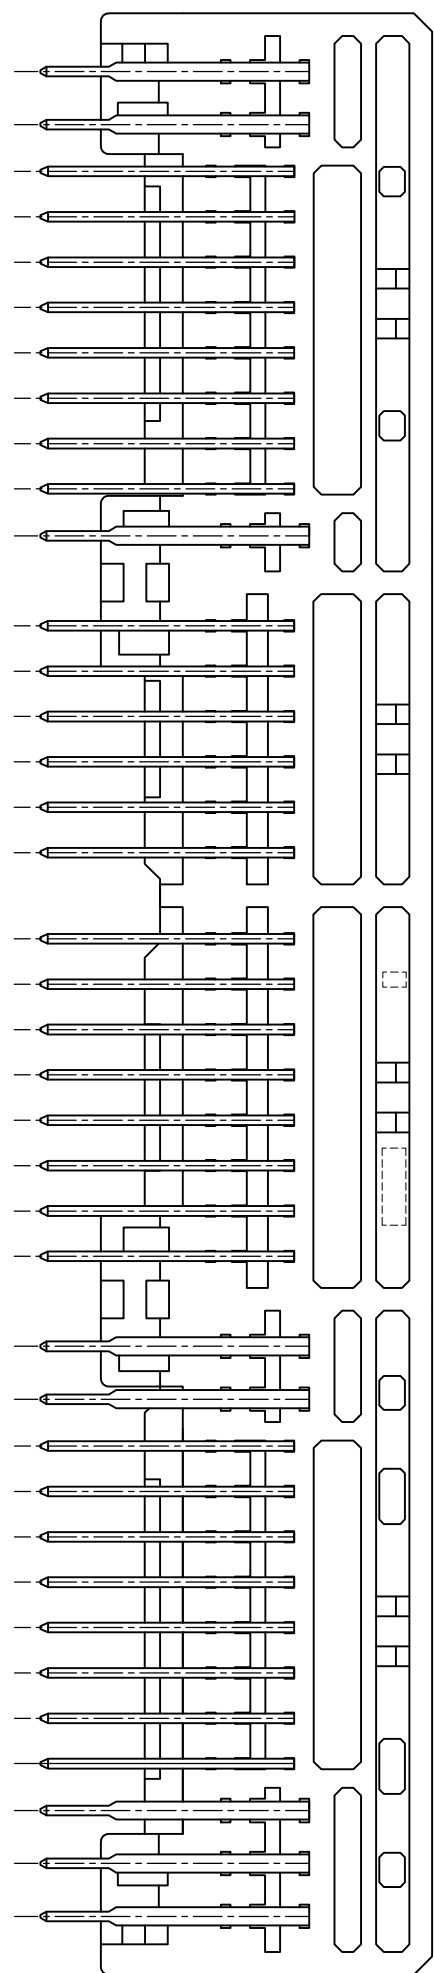

- △ 面から2mmの範囲で測定
2. 嵌合相手ハウジング型：174516, 174515, 174514, 174913
917992, 917989, 917981, 917975
3. 推奨取付ねじ：JIS B1115, B1122 クッピンねじ, なべ2種
呼び径3, 長さ6mm以下 (締付けトルク：0.4N・cm以下)
4. 適用製品規格番号：108-5280, 108-5342
- △ 回路番号：右図参照のこと
- △ 適用製品規格のアフィックス及びIDマークを
カッターマークにて表示

- △ MUST BE KEPT BETWEEN AND 2
- 2 THE MATING PLUG HSG. PART NUMBER; 174516, 174515, 174514, 174913
917992, 917989, 917981, 917975
- 3 RECOMMENDED MOUNTING SCREW; 3mmDIA, 6mmLENGTH(MAX.)
PAN HEAD, CLASS 2 TAPPING SCREW SPECIFIED IN JIS
B1115, B1122
< TIGHTENING TORQUE; 0.4N・m MAX. >
- 4 APPLICABLE PRODUCT SPEC NO. 108-5280, 108-5342
- △ CIRCUIT NUMBER
- POWER CIRCUIT NO. ~
SIGNAL CIRCUIT NO. ~
- △ INDICATED PREFIX AND ID MARK OF PRODUCT P/N BY HOT MARK

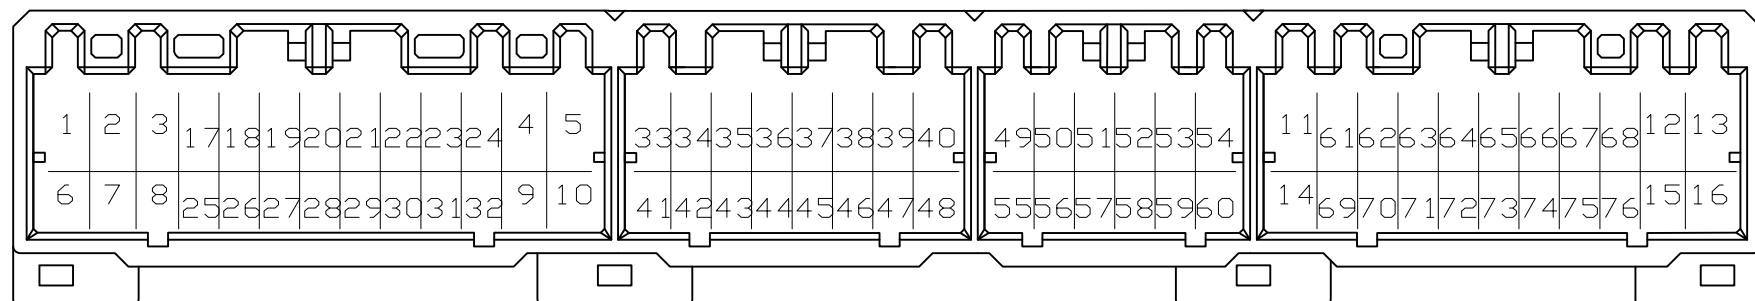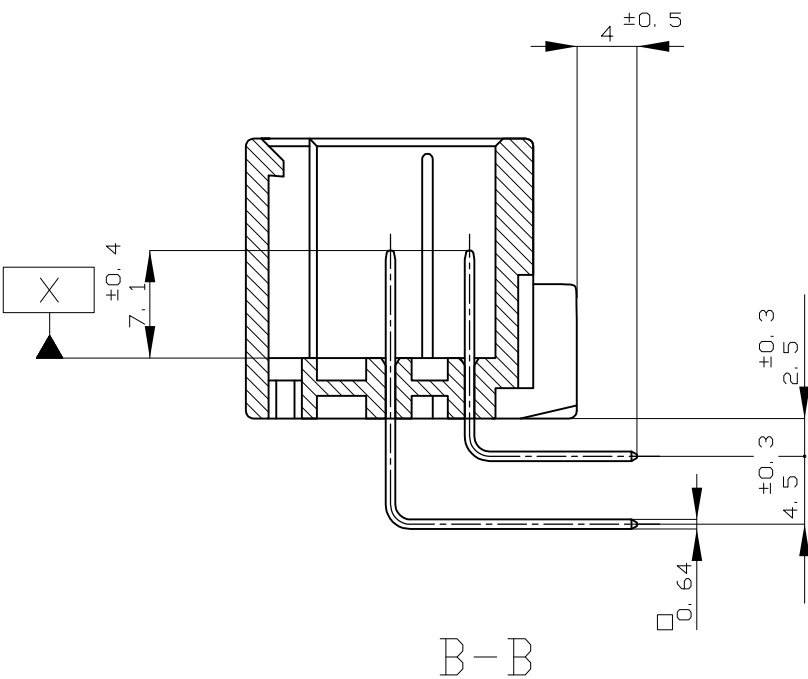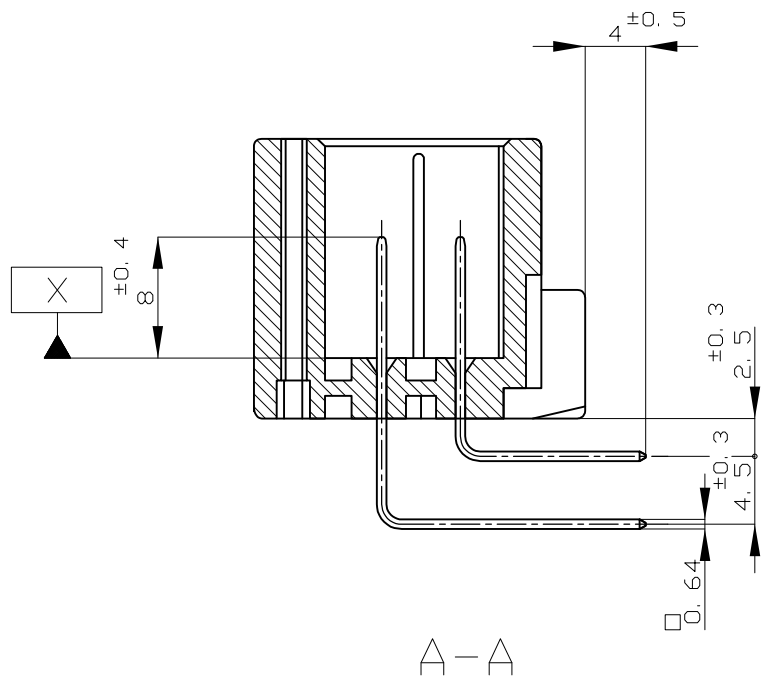

56	SELECTIE-TIN (MATTE)	SELECTIVE GOLD × 14	-	24, 31, 39, 40 42~50, 55	GRAY	6-5178780-6
55	SELECTIE-TIN (MATTE)	SELECTIVE GOLD × 28	-	25~32, 35~40 43~52, 55~58	BLACK	5-5178780-2
55	SELECTIE-TIN (MATTE)	SELECTIVE GOLD × 28	-	25~32, 35~40 43~52, 55~58	NATURAL	5-5178780-1
54	SELECTIE-TIN (MATTE)	SELECTIVE GOLD × 28	-	23, 24, 31~51 55~57, 63, 64	YELLOW	4-5178780-7
54	SELECTIE-TIN (MATTE)	SELECTIVE GOLD × 8	-	49, 50, 52, 53, 68 70, 71, 74	GRAY	4-5178780-6
53	SELECTIE-TIN (MATTE)	SELECTIVE GOLD × 12	-	26~32, 40, 49~52	YELLOW	3-5178780-7
53	SELECTIE-TIN (MATTE)	SELECTIVE GOLD × 60	-	17~76	GRAY	3-5178780-6
52	SELECTIE-TIN (MATTE)	SELECTIVE GOLD × 24	9	23, 24, 31, 33~49 55, 63, 64	YELLOW	2-5178780-7
52	SELECTIE-TIN (MATTE)	SELECTIVE GOLD × 19	-	22, 24, 31, 34, 39~40 42~48, 49, 50, 55, 56, 63, 64	GRAY	2-5178780-6
△ 8	TIN-LEAD	SELECTIVE GOLD × 7	-	49, 50, 52, 53, 68 70, 74	GRAY	8-178780-6
△ 7	TIN-LEAD	SELECTIVE GOLD × 10	-	24, 31, 39, 44~47 49, 55, 64	GRAY	7-178780-6
△ 6	TIN-LEAD	SELECTIVE GOLD × 14	-	24, 31, 39, 40 42~50, 55	GRAY	6-178780-6
△ 5	TIN-LEAD	SELECTIVE GOLD × 28	-	25~32, 35~40 43~52, 55~58	YELLOW	5-178780-7
△ 5	TIN-LEAD	SELECTIVE GOLD × 28	-	25~32, 35~40 43~52, 55~58	BLACK	5-178780-2
△ 5	TIN-LEAD	SELECTIVE GOLD × 28	-	25~32, 35~40 43~52, 55~58	NATURAL	5-178780-1
△ 4	TIN-LEAD	SELECTIVE GOLD × 28	-	23, 24, 31~51 55~57, 63, 64	YELLOW	4-178780-7
△ 4	TIN-LEAD	SELECTIVE GOLD × 8	-	49, 50, 52, 53, 68 70, 71, 74	GRAY	4-178780-6
△ 3	TIN-LEAD	SELECTIVE GOLD × 60	-	17~76	GRAY	3-178780-6
△ 2	TIN-LEAD	SELECTIVE GOLD × 24	9	23, 24, 31, 33~49 55, 63, 64	YELLOW	2-178780-7
△ 0	SELECTIVE-TIN (MATTE)	SELECTIVE-TIN (BRIGHT) × 76	-	-	LIGHT GRAY	178780-9
△ 1	SELECTIVE-TIN (MATTE)	SELECTIVE-TIN (BRIGHT) × 76	-	-	NATURAL	178780-3
△ 0	SELECTIVE-TIN (MATTE)	SELECTIVE-TIN (BRIGHT) × 76	-	-	NATURAL	178780-1
MARKING マーキング	SOLDERING SIDE 半田付け面	CONTACT SIDE 接点側	POWER CIRCUIT NO. パワー回路	SIGNAL CIRCUIT NO. シグナル回路	COLOR 色	PART NUMBER 製品番号
	CONTACT FINISH コンタクト仕上		GOLD PLATED CIRCUIT NO. 金めっき回路番号			

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
単位：mm

TOLERANCES UNLESS
OTHERWISE SPECIFIED
公差

0 PLC
1 PLC
2 PLC
3 PLC
4 PLC

±
±
±
±
±

0.05
0.1
0.15
0.2
0.3

GENERAL TOLERANCE
公差

0<≤10 : ±0.2
10<≤30 : ±0.25
30<≤100 : ±0.3
ANGLES : ±3°

MATERIAL
材料

HOUSING : PBT
CONTACT : BRASS

FINISH
仕上

SEE TABLE

DWN
M. KADOSAKI
CHK
T. SHINOHARA
APVD
K. BETSUJI

120CT05
120CT05
120CT05

76POS CAP HOUSING ASSY
.040/.070 SERIES HYBRID I/O CONN. (NON FLANGE)

SIZE
A1

CAGE CODE
00779

DRAWING NO
178780

WEIGHT
23.8 g

CUSTOMER DRAWING

SCALE
2:1

SHEET
1 of 1

REV
P8

TE Connectivity

76POS CAP HOUSING ASSY
.040/.070 SERIES HYBRID I/O CONN. (NON FLANGE)

NAME
名称

PRODUCT SPEC
製品規格

APPLICATION SPEC
取付適用規格

REVISIONS
REV
REV

4805 (1/15)

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[178780-9](#)