


PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0740612514](#)
Status: **Active**
Overview: [VHDM® Backplane Connector Systems](#)
Description: 2.00mm Pitch VHDM® Single-Ended Board-to-Board Backplane Header, Vertical, 8-Row, Guide Pin Signal Module, Pin End Version, 200 Circuits, Pin Length 5.15mm. Series:74075 Enables designers to create custom loaded connectors utilizing standard pin lengths 4.25, 4.75, 5.15 and 6.25mm25, 4.75, 5.15 and 6.25mm

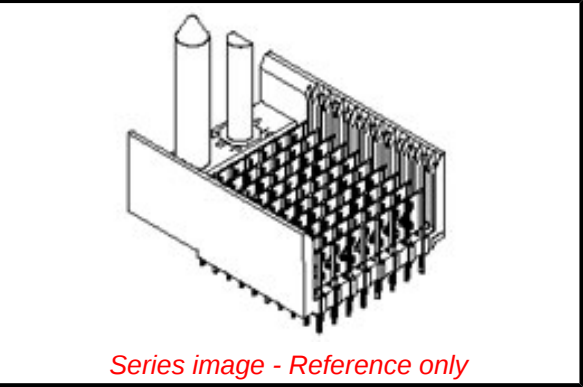

Documents:
[Drawing \(PDF\)](#) [Packaging Specification PK-74061-003 \(PDF\)](#)
[Product Specification PS-74031-999 \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

General	
Product Family	Backplane Connectors
Series	74061
Application	Backplane
Application Tooling Documents	TM-622010999
Comments	Keying Position A
Component Type	PCB Header
Overview	VHDM® Backplane Connector Systems
Product Name	VHDM®
UPC	800753257559
Physical	
Circuits (Loaded)	200
Circuits (maximum)	200
Color - Resin	Black
Durability (mating cycles max)	200
First Mate / Last Break	No
Guide to Mating Part	Yes
Keying to Mating Part	Yes
Material - Metal	Beryllium Copper, High Performance Alloy (HPA), Stainless Steel
Material - Plating Mating	Gold
Material - Plating Termination	Tin-Lead
Material - Resin	High Temperature Thermoplastic
Net Weight	17.192/g
Number of Columns	25
Number of Pairs	Open Pin Field
Number of Rows	8
Orientation	Vertical
PC Tail Length	2.50mm
PCB Locator	No
PCB Retention	None
PCB Thickness - Recommended	1.80mm
Packaging Type	Tube
Pitch - Mating Interface	2.00mm
Pitch - Termination Interface	1.00mm
Plating min - Mating	0.762µm
Plating min - Termination	0.762µm
Polarized to PCB	Yes
Surface Mount Compatible (SMC)	Yes
Temperature Range - Operating	105°C max
Termination Interface: Style	Through Hole - Compliant Pin
Electrical	
Current - Maximum per Contact	3.0A

EU ELV	
Not Reviewed	
EU RoHS	China RoHS
Not Reviewed	
REACH SVHC	
Not Reviewed	
Halogen-Free	
Status	
Not Reviewed	
Need more information on product environmental compliance?	
Email productcompliance@molex.com	
Please visit the Contact Us section for any non-product compliance questions.	
China ROHS	Not Reviewed
ELV	Not Reviewed

Search Parts in this Series
[74061](#) Series

Mates With
[74040](#) VHDM® Board-to-Board
Daughtercard Receptacle

Application Tooling FAQ	
Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.	
Global	
Description	Product #
Insertion Module for Standard Shield Signal Header, 8-Row by 25-Wide, 50.00mm	0622020210
Signal Pin Inserter Repair Tool	0622015700

Data Rate	3.125 Gbps	8-Row Pin and	<u>0622015900</u>
Shield Type	Ground Plane Shield	Shield Repair Tool	
Shielded	Yes	Insertion Module	<u>0622020206</u>
Voltage - Maximum	120V AC (RMS)/DC	for Advanced Mate	
Material Info		Signal Header, 6-	
		Row by 25-Wide,	
		50.00mm	
Reference - Drawing Numbers		8-Row Shield	<u>0622016100</u>
Packaging Specification	PK-74061-003	Extraction Tool	
Product Specification	PS-74031-999		
Sales Drawing	SD-74061-002		
Note: HDM, HDM+, VHDM, VHDM-HSD and GbX are trademarks or registered trademarks of Amphenol TCS.			

This document was generated on 09/29/2016

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Molex:](#)

[74061-2514](#)