

## Diode block - EMG 90-DIO 32P - 2954918

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Diode module, for extension with 32 1N 4007 diodes, common cathode

### Product Features

- Spark-suppression diodes for limiting surge voltages of inductive loads
- Electrical decoupling of messages in fault reporting systems



### Key Commercial Data

Packing unit	1 pc
GTIN	 4 017918 085186
Weight per Piece (excluding packing)	167.17 g
Custom tariff number	85411000
Country of origin	Germany

### Technical data

#### Dimensions

Width	90 mm
Height	75 mm
Depth	55 mm

#### Ambient conditions

Ambient temperature (operation)	-20 °C ... 50 °C
Ambient temperature (storage/transport)	-40 °C ... 70 °C

#### General

Diode type	1 N 4007
------------	----------

# Diode block - EMG 90-DIO 32P - 2954918

## Technical data

### General

Max. operating voltage	250 V AC
Peak reverse voltage per diode	1300 V
Reverse current per diode	5 µA
Conducting state voltage per diode	approx. 0.8 V
Conducting state current per diode	0.7 A (with single load)
	0.2 A (with simultaneous loads)
Overvoltage category	III, basic insulation (as per EN 50178)
Mounting position	any
Assembly instructions	In rows with zero spacing

### Connection data

Conductor cross section solid min.	0.2 mm <sup>2</sup>
Conductor cross section solid max.	4 mm <sup>2</sup>
Conductor cross section flexible min.	0.2 mm <sup>2</sup>
Conductor cross section flexible max.	2.5 mm <sup>2</sup>
Conductor cross section AWG min.	24
Conductor cross section AWG max.	12
Stripping length	8 mm
Screw thread	M3
Connection method	Screw connection

### Standards and Regulations

Low Voltage Directive	Conformance with LV directive 2006/95/EC
Conformance	CE-compliant

### Classifications

#### eCl@ss

eCl@ss 4.0	27250312
eCl@ss 4.1	27260801
eCl@ss 5.0	27260801
eCl@ss 5.1	27260801
eCl@ss 6.0	27242602
eCl@ss 7.0	27242602
eCl@ss 8.0	27371010

#### ETIM

ETIM 2.0	EC001432
----------	----------

## Diode block - EMG 90-DIO 32P - 2954918

### Classifications

#### ETIM

ETIM 3.0	EC001597
ETIM 4.0	EC001597
ETIM 5.0	EC000683

#### UNSPSC

UNSPSC 6.01	30211506
UNSPSC 7.0901	39121008
UNSPSC 11	39121008
UNSPSC 12.01	39121008
UNSPSC 13.2	39121008

### Approvals

#### Approvals

---

#### Approvals

#### EAC

---

#### Ex Approvals

---

#### Approvals submitted

---

### Approval details

EAC
-----

### Accessories

#### Accessories

Marking material - EMG-GKS 12 - 2947035




Equipment marker, width 12 mm

Diode block - EMG 90-DIO 32P - 2954918

## Drawings

## Circuit diagram

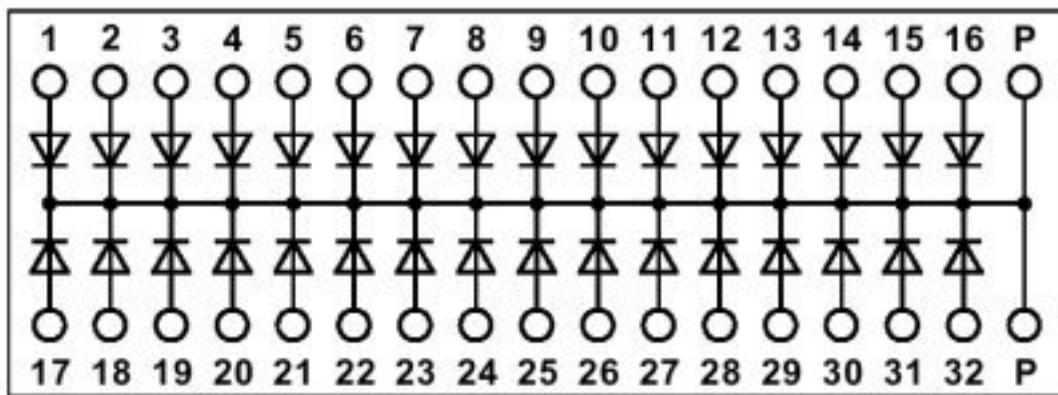

Phoenix Contact 2016 © - all rights reserved  
<http://www.phoenixcontact.com>

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Phoenix Contact:](#)

[2954918](#)