


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION		DATE	APVD
—	—		L	REV PER ECO 13-016525		12-9-13	JW

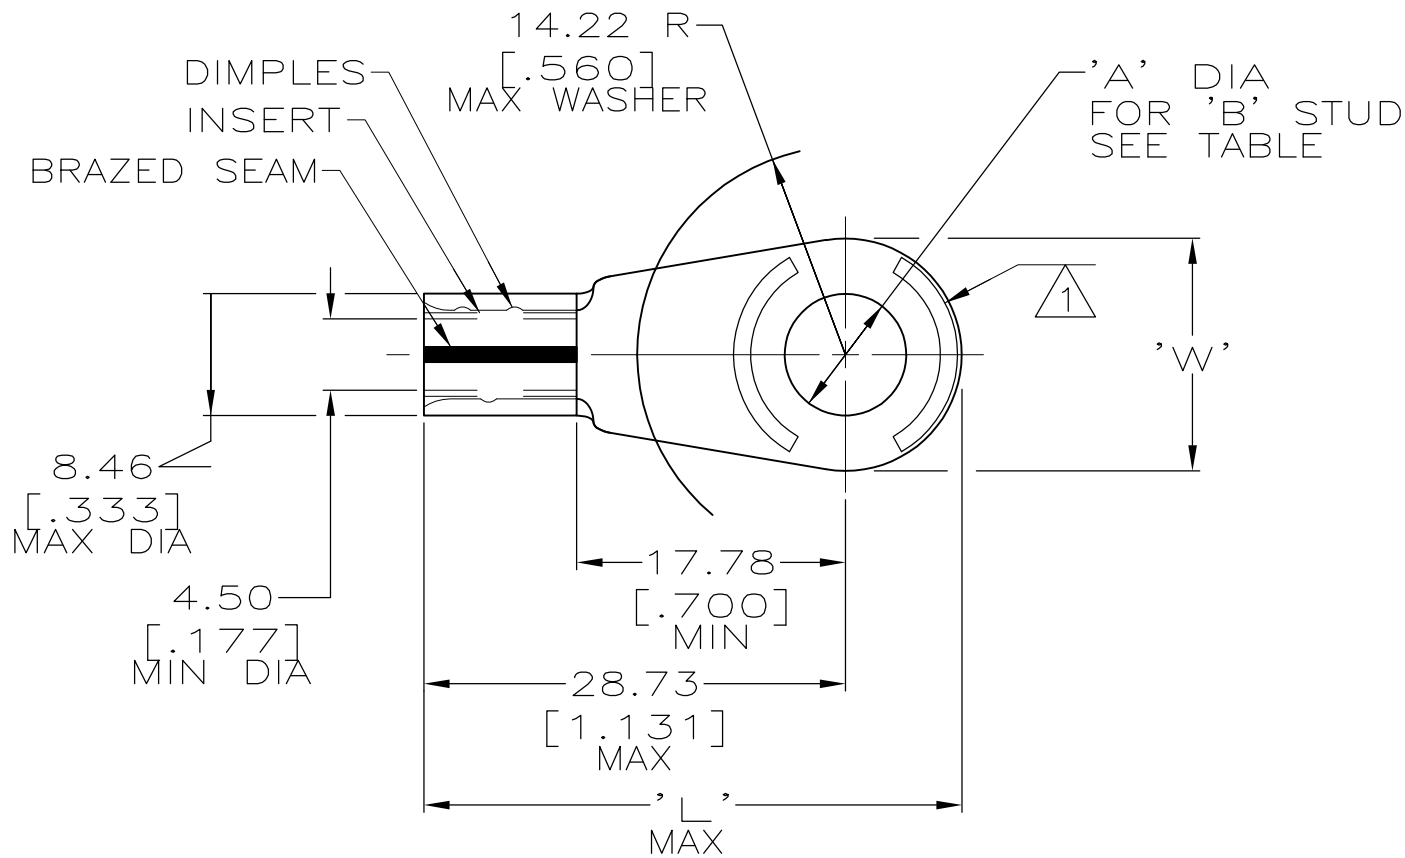

- 1 STAMP 8 AL90CU APPROX AS SHOWN
- 2 MATERIAL THK: 1.14 ±0.08 [.045 ±.003]

OBSOLETE	3.68±0.08 [.145±.003]	#6	35.15 [1.384]	12.70 [.500]	BODY: COPPER PER ASTM B-152 TIN PL 0.00254[.000100] MIN THK PER MIL-T-10727	50720-5
OBSOLETE	11.51±0.13 [.453±.005]	7/16	15.88 [.625]	36.73 [1.446]		50720-4
OBSOLETE	9.91±0.13 [.390±.005]	3/8	15.88 [.625]	36.73 [1.446]		50720-3
	8.33±0.13 [.328±.005]	5/16	15.88 [.625]	36.73 [1.446]	INSERT: BRASS PER MIL-C-50 TIN PL 0.00254[.000100] MIN THK PER MIL-T-10727	50720-2
	6.73±0.13 [.265±.005]	1/4	35.15 [1.384]	12.70 [.500]		50720-1
	5.00±0.08 [.197±.003]	#10	35.15 [1.384]	12.70 [.500]		50720
	'A'	'B'	'L'	'W'	MATERIAL & FINISH	AMP PART NUMBER

AMP INCORPORATED
CUSTOMER SERVICE SYSTEMS

FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS

PRODUCT INFORMATION CENTER
1-800-522-6752

FOR APPLICATION TOOLING INFORMATION

TOOLING ASSISTANCE CENTER
1-800-722-1111

FOR ORDER ENTRY

1-800-526-5142

RECOMMENDED OPERATING TEMPERATURE:
150° C MAX

VOLTAGE RATING:
NOT APPLICABLE

WIRE CROSS SECTIONAL AREA RANGE:
6.64-10.53mm²[13,100-20,800] CIR MILS STRANDED

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm

MATERIAL
SEE TABLE

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ± -
1 PLC ± -
2 PLC ± 0.20[.008]
3 PLC ± -
4 PLC ± -
ANGLES ± -
FINISH

SEE TABLE

DWN DK SCHRUM 09SEP96
CHK DM SWARTZ 11SEP96
APVD JL MECKLEY 11SEP96
PRODUCT SPEC
APPLICATION SPEC
WEIGHT -

TE Connectivity

NAME
TERMINAL ASSEMBLY, RING TONGUE,
STRANDED/SOLID, COPALUM
TM

SIZE
A3

CAGE CODE
00779

DRAWING NO
C-50720

RESTRICTED TO
-

CUSTOMER DRAWING

SCALE 2:1

SHEET 1 OF 1

REV L

1470-19 (3/11)

2:37pm

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[50720](#)