

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

-.-



© COPYRIGHT - By - ALL RIGHTS RESERVED.

88,9

LOC	DIST	REVISIONS				DATE	DWN	APVD
P	LTR	DESCRIPTION						
	R	PER ECR-15-012900				8SEP2015	DS	FY



D

D

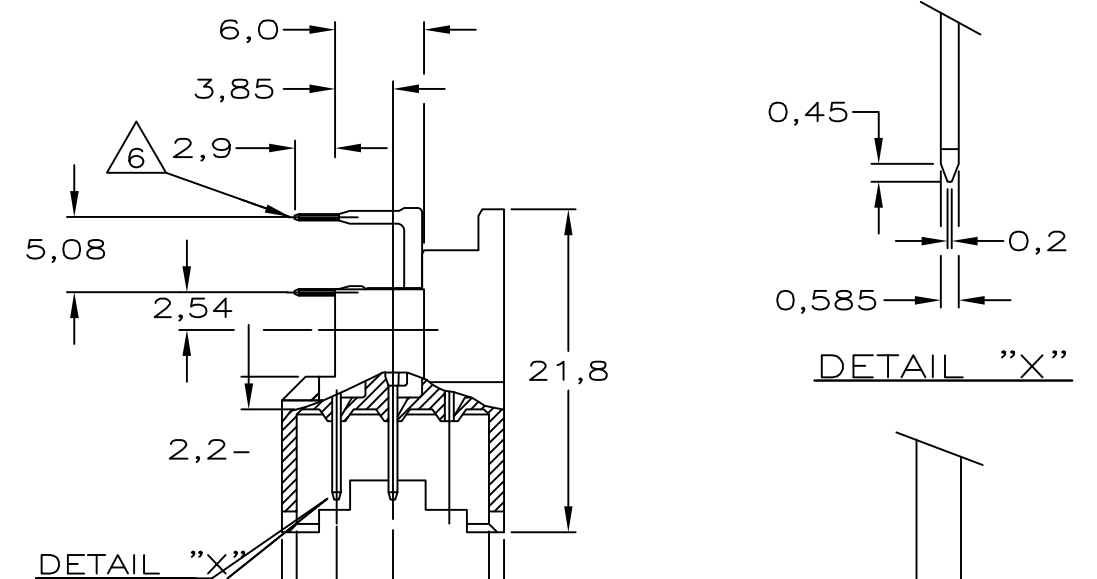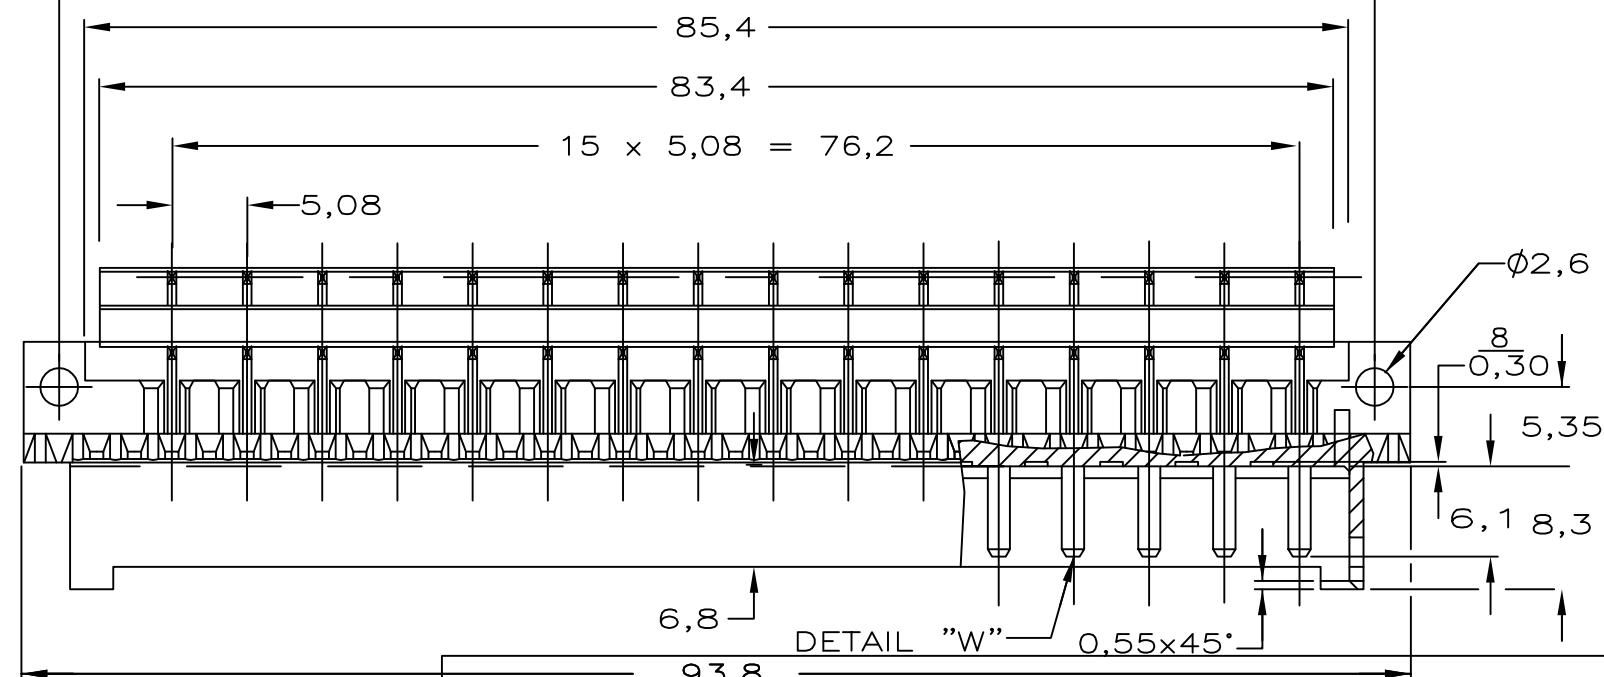

C

C

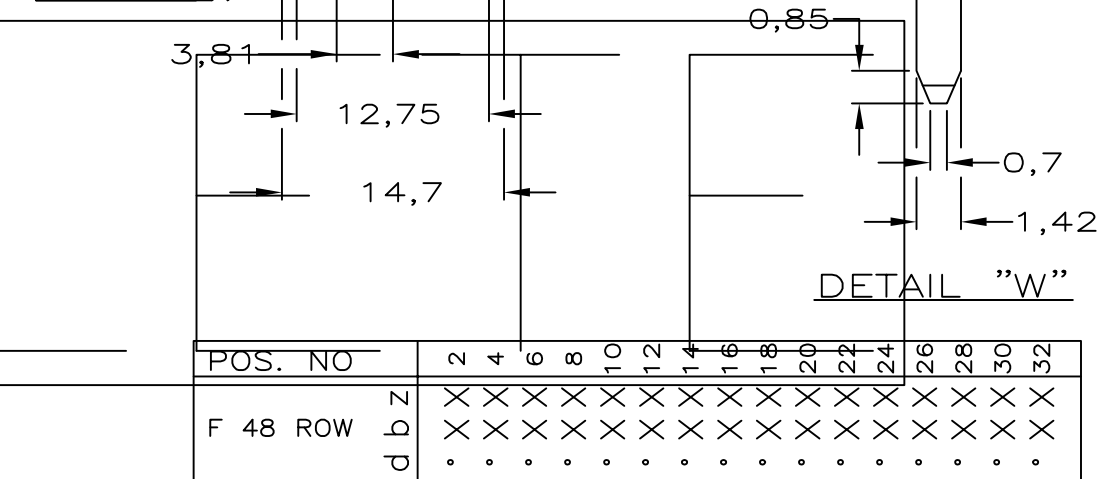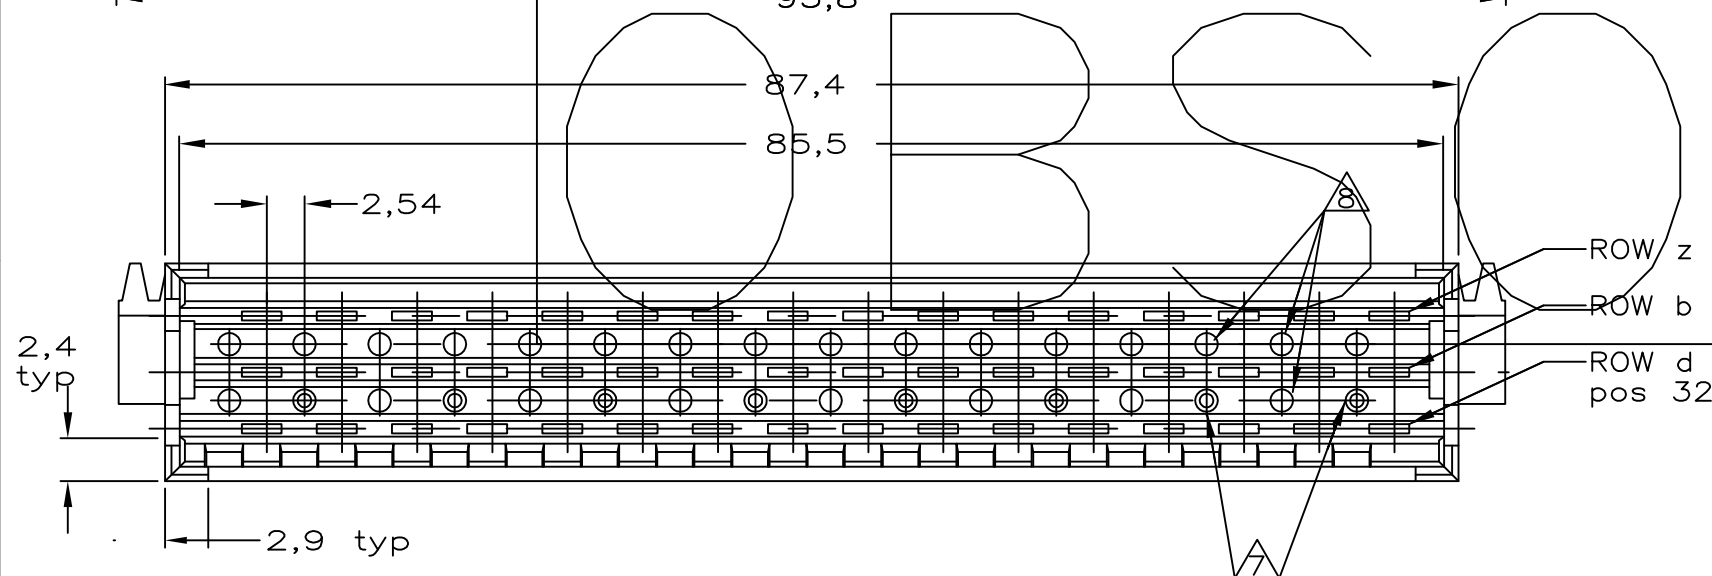

AN ASTERISK „X” DENOTES A STANDARD CONTACT.

B

B

NOTES

- MATERIAL:
 - HOUSING: THERMOPLASTIC POLYESTER, COLOR GREY.
 - CONTACTS: BRASS.
- PLATING CONTACT: 1,25 μm Au OVER 1,25 μm Ni IN CONTACT AREA. Sn/Pb over 1,25 μm Ni ON SOLDER POST.
- PLATING CONTACT: 0,8 μm Au OVER 1,25 μm Ni IN CONTACT AREA. Sn/Pb over 1,25 μm Ni ON SOLDER POST.
- PLATING CONTACT: 2,0 μm Au OVER 1,25 μm Ni IN CONTACT AREA. Sn/Pb over 1,25 μm Ni ON SOLDER POST.
- PLATING CONTACT: 0,4 μm Au OVER 1,25 μm Ni IN CONTACT AREA. Sn/Pb over 1,25 μm Ni ON SOLDER POST.
- SOLDER POSTS SUITABLE FOR P.C.B. HOLES 0,8 $\pm$ 0,05 OR 1,0 $\pm$ 0,1 DIA.
- 8 HOLES SUITABLE FOR KEYING PIN PN. 215916-1.
- KEYING HOLES TO BE DRILLED BY CUSTOMER.

2--8 OBSOLETE	SEE NOTE	5	2-164043-8
2--7 OBSOLETE	SEE NOTE	4	2-164043-7
2--4 OBSOLETE	SEE NOTE	3	2-164043-4
	SEE NOTE	2	2-164043-1

A

A

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R.v.Lokven 31.03.93	TE TE Connectivity	
		CHK J.GIBBELS		
		APVD -	NAME	
		PRODUCT SPEC -	32 POS. DIN 41612 F MALE SOLDER CONNECTOR	
		APPLICATION SPEC -		
		WEIGHT -	SIZE A3	CAGE CODE 00779
		CUSTOMER DRAWING	DRAWING NO C=164043	RESTRICTED TO -
		SCALE -	SHEET 1 of 1	REV R