
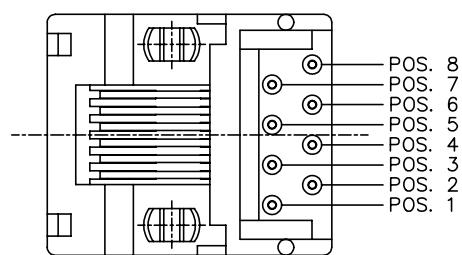
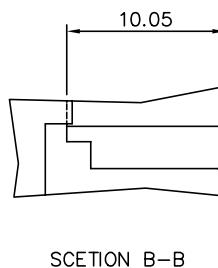
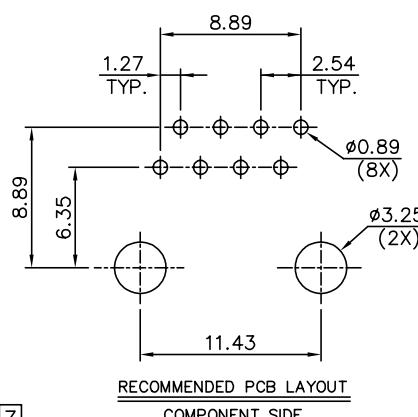
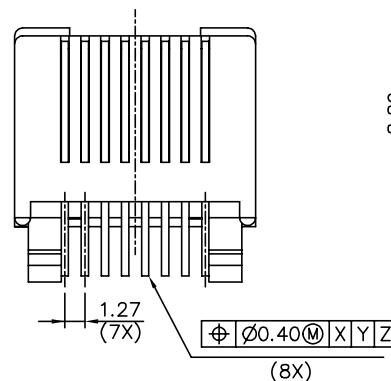


PART NO.	NO. OF POSITION	LOADED POSITION	CONTACTS PLATING
74591-088	8	ALL	5u" Au + high performance lubricant
74591-388			5u" Au + high performance lubricant
74591-588			50u" GXT

NOTES:

1. RECOMMENDED PCB THICKNESS 1.6mm.
2. HOUSING MAT'L: NYLON 66, 25% GLASS REINFORCED, UL 94V-0, COLOR BLACK.
3. CONTACTS: PHOSPHOR BRONZE ALLOY UNS-C51000, #0.46 ROUND WIRE. PLATING: SEE TABLE.
4. PROTRUDED SHELF ONLY APPEARS ON 8 POS. JACK.
5. PACKAGING SPEC.: GES-14-361(USE TUBE).
6. EQUIVALENT THICKNESS Au AND GXT PLATING HAVE SAME FUNCTION AND THEY ARE ALTERNATIVE BY THE CUSTOEMR.

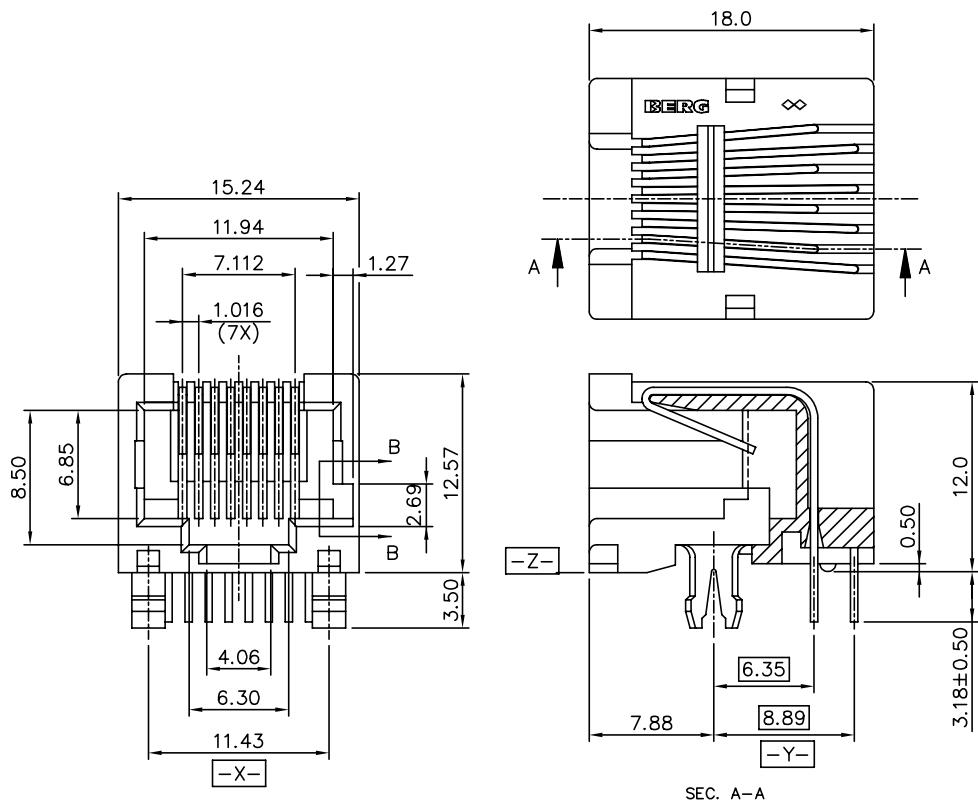

mat'l. code			surface	tolerance	projection	product family				
			ISD1302	✓ ISD1101 ISD406		MOD	JACK			
ltr	ecn	nodr	date	tolerances unless otherwise specified		title				
A	T05074	MW	11/06/00	angle	0.X±0.3	mm	04/13/98			
B	ELX-N-010706SH	MA0	3/14/12	angle	0.XX±0.15	HORZ MOD JACK, FOR 1.6MM P.C.B.				
				0°±2"	0.XXX±0.05	scale 2.0				
				dr	CATHY LIN	04/13/98	dwg no	sheet 1 of 1	size	
				engr	TONY CHIEN	04/13/98				
				chr	TONY CHIEN	04/13/98				
				appd	JENN TSAO	04/13/98				
sheet	revision B						type	Product	Customer	Drawing
index	sheet 1									

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[FCI / Amphenol:](#)

[74591-088LF](#)