


卷轮载带包装: 总共 3000PCS/轮

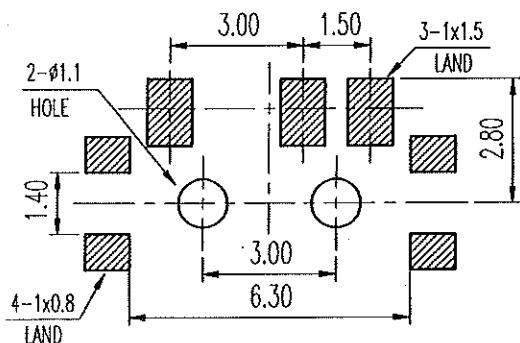

安装孔 PIERCING PLAN




示意图 SCHEMATIC

### 规格 Specifications

额定负荷 Ratings	DC 4 V 0.3 A
初触接触电阻 Initial Contact Resistance	70 mΩ Max.
绝缘电阻 Insulation Resistance	DC 500 V 60±5 Sec. 100 MΩ Min.
抗电强度 Dielectric Voltage	AC 100 V (50~60 HZ) 60 Sec.

操作力 Operating Force (gf)	A → B B → A 150 ± 100
负荷寿命 Operating Life With Load	10,000 cycles

Sylvain  
2013-02-25  
Rochon

6	弹片 SPRING PLATE	SUS	1	NATURAL
5	接触片 CONTACT	C5210R	1	Ag CLAD
4	端子 TERMINAL	C2680R	3	Ag PLATED
3	盖片 COVER	SPT ①	1	Ag PLATED
2	胶柄 KNOB	LCP	1	BLACK C
1	胶壳 HOUSING	LCP	1	BLACK C
序 NO.	零件 PART	材料 MATERIAL	数量 QTY	备注 REMARKS

A 版本 A03 变更为 A		陈永成	2007.09.27
A03	修改内容详见图中标示 ① 所示	王永东	07-09-27
A02	修改内容详见图中标示 ① 所示	王小东	07-08-08
A01		王小东	07-05-10
标号 REV	内容 DESCRIPTION	签名 SIGN.	日期 DATE
DWG NO.		ITEM2848	

TOLERANCES UNLESS OTHERWISE SPEC.		TITLE	SIDE KNOB SLIDE SWITCH	ITEM NO	SK-12C0405-SG 1.5 RT
UNDER 1	± 0.10	DRAWN	2007-09-27	VERSION	A03
1 - 10	± 0.30	REVIEWED	07-09-27	SCALE	A
OVER 10	± 0.50	APPROVED	2007-09-27	PROJECTION	UNIT mm

COMAX ELECTRONICS(HUIZHOU) CO.,LTD

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[C&K Switches:](#)

[SK12C0405SG1.5RT](#)