
Description	Material	Finish
Body	Brass	Nickel
Pin	BE CU	Gold
Insulation	PTFE	N/A
Heat Shrink	Polyolefin	Black

	REVISIONS				
REV	DESCRIPTION	DATE	APPV		
В	New frame	1/15/10	CJ		
С	Added new title block	12-JUL-12	BPM		

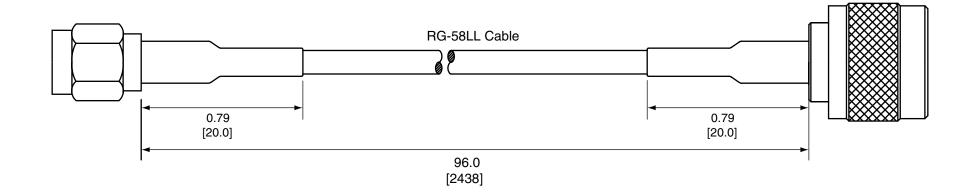

## NOTES: (UNLESS OTHERWISE SPECIFIED)

- ALL DIMENSIONS ARE IN INCHES [mm].
- 2. DIMENSIONS APPLY AFTER FINISHING.
- 3. MANUFACTURE TO BE COMPLIANT WITH EU ROHS DIRECTIVE.
- 4. SAFETY BREAK ALL SHARP CORNERS AND EDGES .02 MAXIMUM.

WARNING: THIS DRAWING CONTAINS PROPRIETARY INFORMATION THAT IS THE SOLE PROPERTY OF LINX TECHNOLOGIES, AND SHALL BE TREATED AS SUCH. NO DISCLOSURE OR REPRODUCTION OF THIS DOCUMENT IS PERMITTED, IN WHOLE OR IN PART, WITHOUT THE EXPRESS WRITTEN PERMISSION OF LINX TECHNOLOGIES OR ITS DESIGNATED AGENTS.

DESIGNATED AGENTS.

MATERIAL:

TOLERANCES:
.020 [0.50]-200 [5.00]=±.008 [0.20]
.200 [5.00]-1.200 [30.00]=±.016 [0.40]
1.20 [30.0]-4.75 [120.0]=±.024 [0.60]
4.75 [120.0]-12.40 [315.0]=±.040 [1.0]

DRAWN: CJ

DRAWN: CJ

DESIGNATED AGENTS.

SMA
WITH 8' OF

WITH 8' OF

SIZE
ANGLES: ±1°
ANGLES: ±1°
ANGLES: ±10°
ANGLES: ±

DT:

ENGR:

Linx Linx

159 ORT LANE MERLIN, OR 97532

SMA MALE TO N MALE WITH 8' OF RG58 LOW LOSS CABLE

SIZE DWG. NO.

C58LL-SMAM-2438-NM

C

SCALE: 2:1 DO NOT SCALE DRAWING SHEET 1 OF 1

## **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Linx Technologies: C58LL-SMAM-2438-NM