



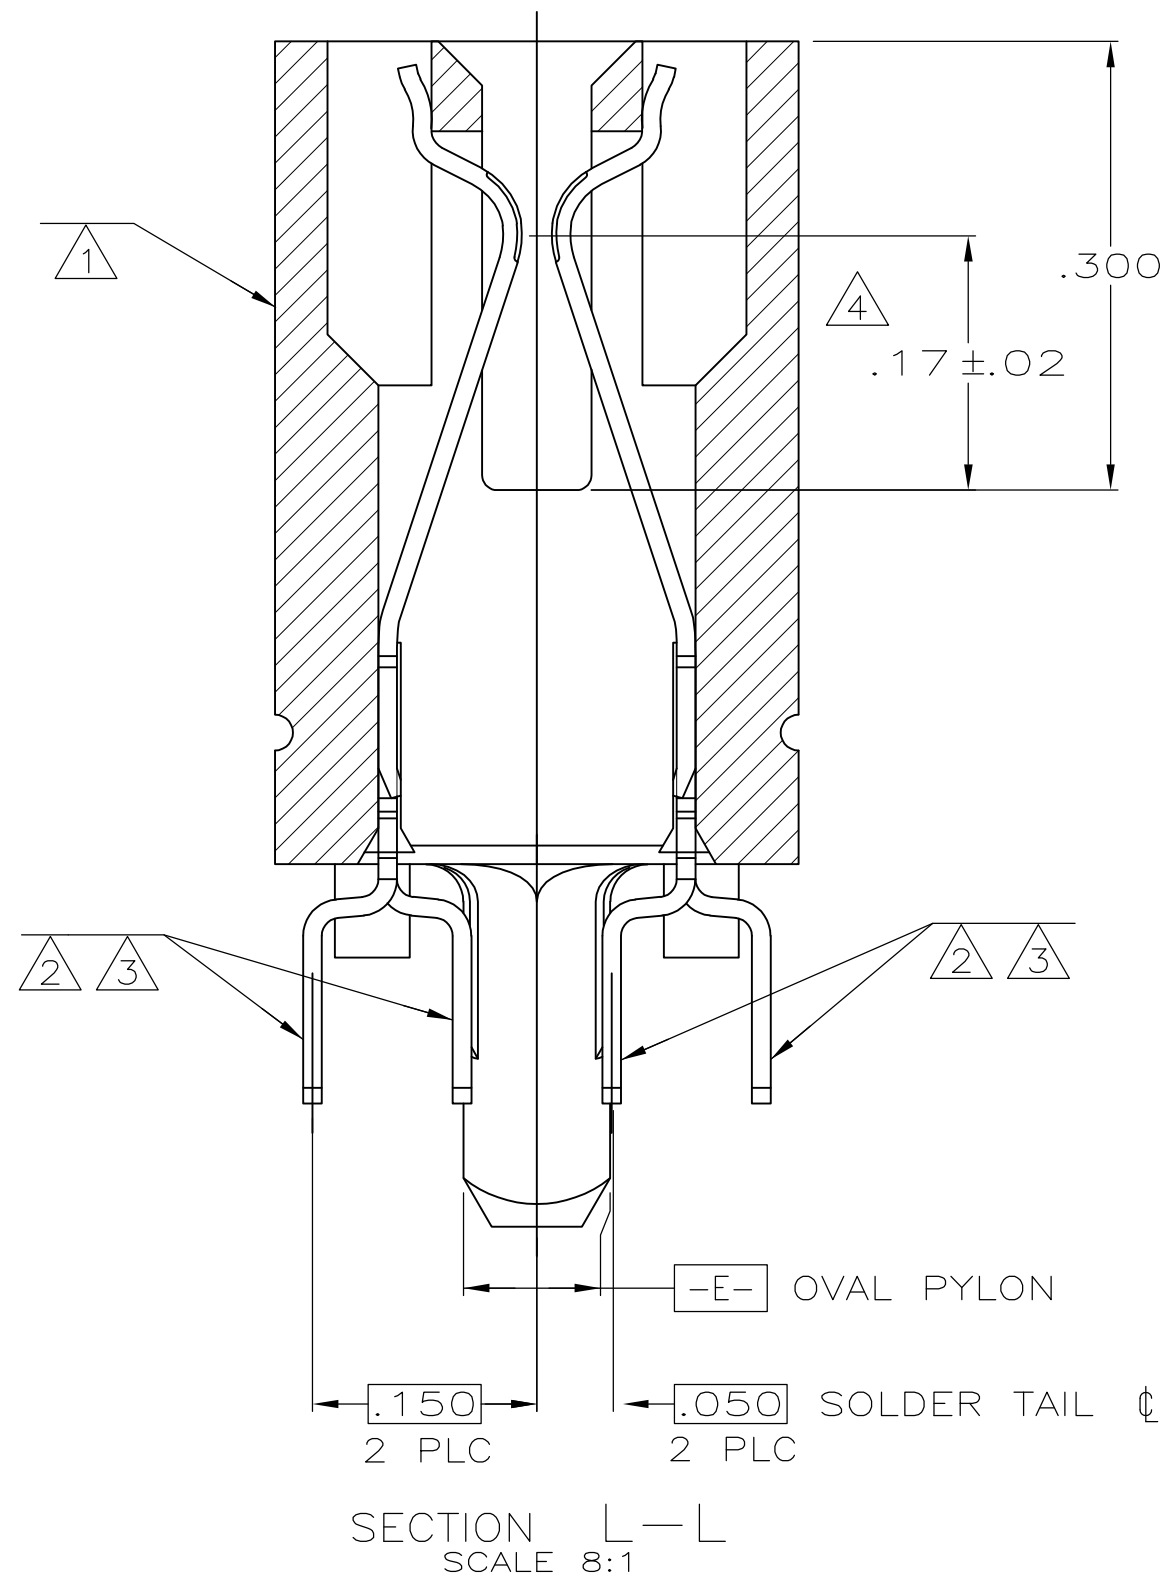


- | | | | | | | | | | | | | |
|--|-----------------|-------|-------|-------|-------|------|----|----|------|-----------------------|----------------|----------|
| OBSOLETE | A | 2.350 | 3.110 | 3.94 | .610 | 13 | 10 | 44 | .14 | 70 | 1-650231-0 | |
| | D | 2.100 | 3.560 | 5.94 | 2.160 | 27 | 41 | 39 | .10 | 110 | 650231-9 | |
| OBSOLETE | A | 2.350 | 5.610 | 6.44 | .610 | 63 | 10 | 44 | .125 | 120 | 650231-8 | |
| <div style="border: 1px solid black; padding: 2px; display: inline-block;"> <div style="border: 1px solid black; width: 10px; height: 10px; margin: 0 auto;"></div> 6 </div> | C | 2.350 | 4.060 | 6.44 | 2.160 | 32 | 41 | 44 | .14 | 120 | 650231-7 | |
| | C | 2.350 | 4.060 | 6.44 | 2.160 | 32 | 41 | 44 | .10 | 120 | 650231-6 | |
| | A | 2.350 | 3.110 | 3.94 | .610 | 13 | 10 | 44 | .10 | 70 | 650231-5 | |
| OBSOLETE | B | 2.350 | 4.060 | 6.44 | 2.160 | 32 | 41 | 44 | .10 | 120 | 650231-4 | |
| OBSOLETE | A | 2.350 | 4.910 | 5.74 | .610 | 49 | 10 | 44 | .10 | 106 | 650231-3 | |
| <div style="border: 1px solid black; padding: 2px; display: inline-block;"> <div style="border: 1px solid black; width: 10px; height: 10px; margin: 0 auto;"></div> 6 </div> | OBSOLETE | A | 2.350 | 5.610 | 6.44 | .610 | 63 | 10 | 44 | .10 | 120 | 650231-2 |
| | A | 2.350 | 5.610 | 6.44 | .610 | 63 | 10 | 44 | .14 | 120 | 650231-1 | |
| | HOLE
PATTERN | V | U | T | S | Z | Y | X | W | NO OF
DUAL
POSN | PART
NUMBER | |

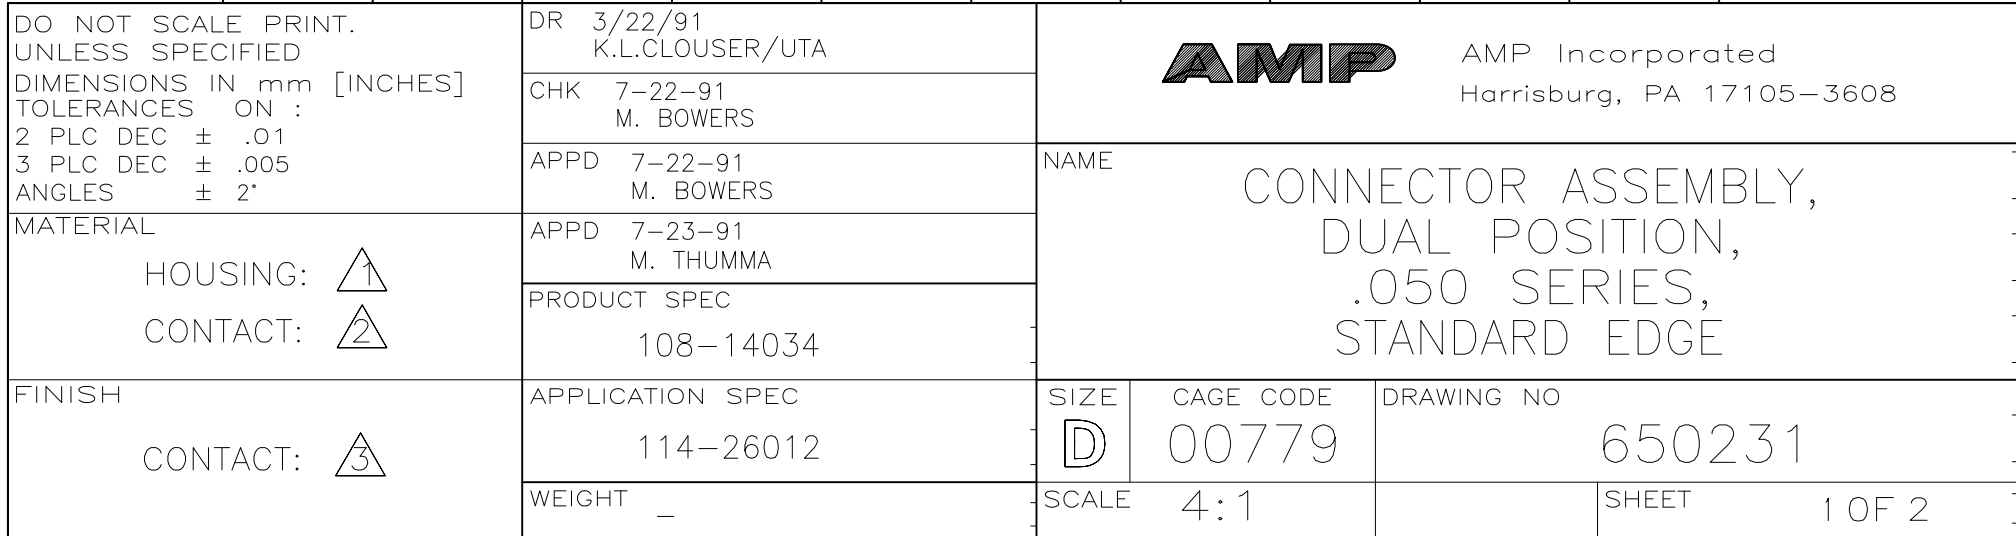


CUSTOMER DRAWING


LOC		DIST						REVISIONS		
AD		14		P	F	ZONE	LTR	DESCRIPTION	DATE	APPD
							P1	SEE SHEET 1	-	-

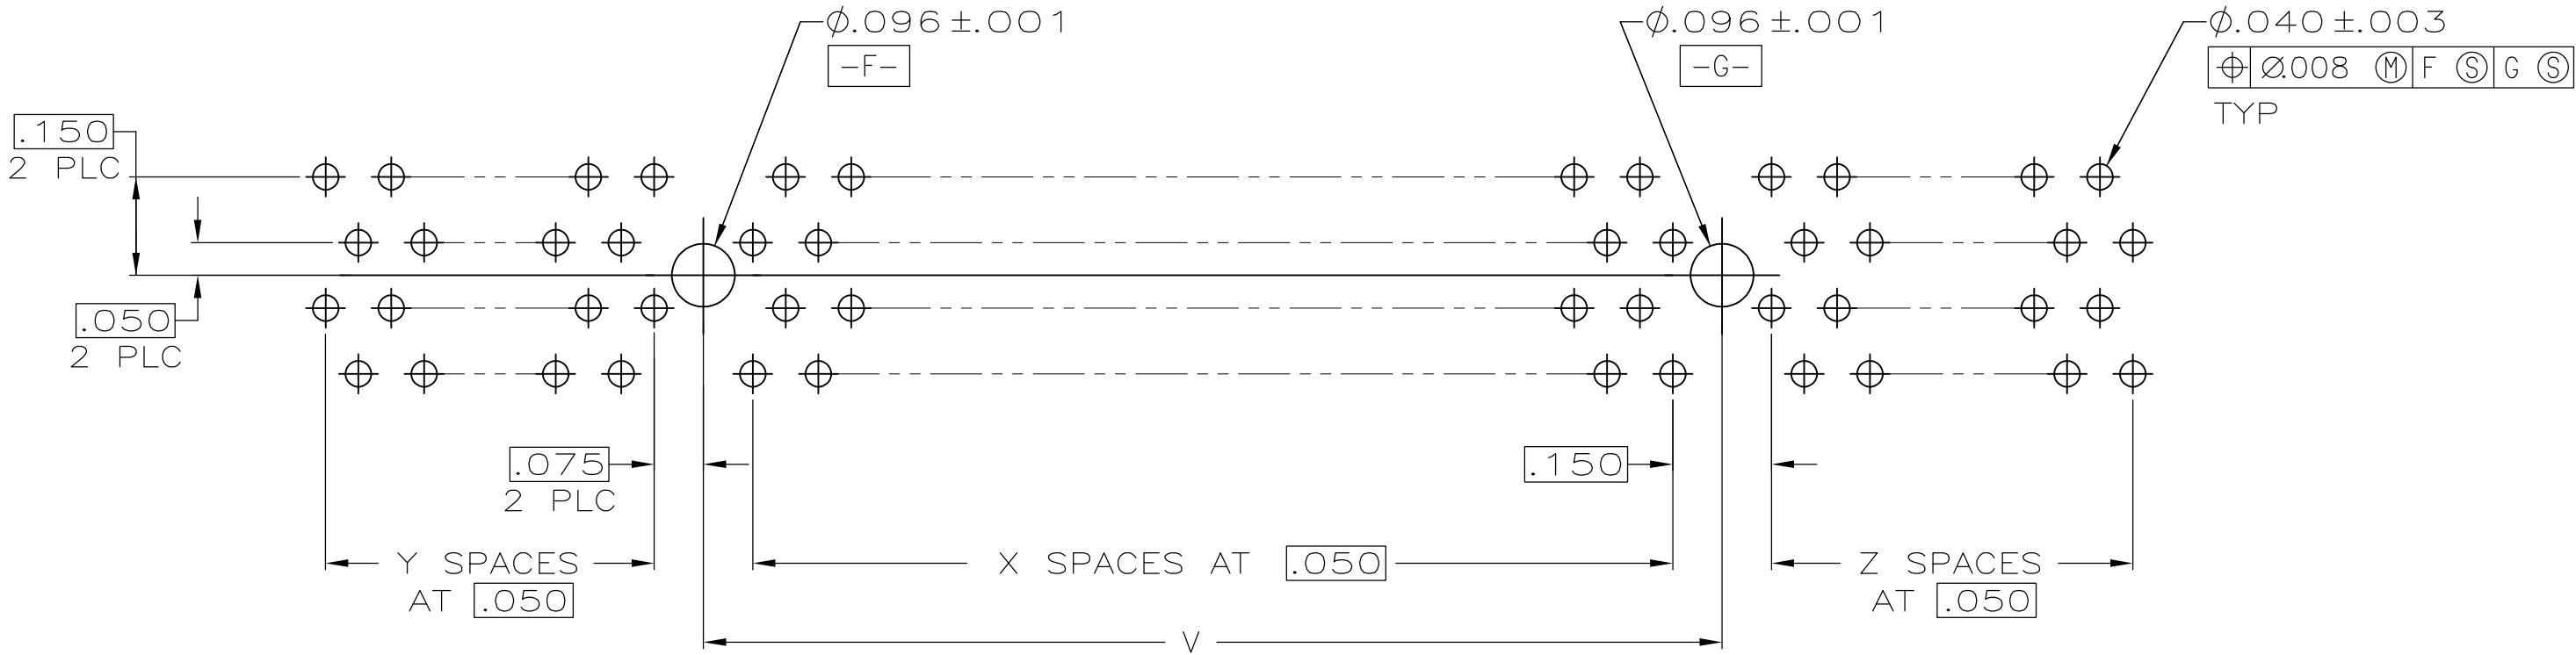


RECOMMENDED CONNECTOR MOUNTING HOLE PATTERN A
(CONNECTOR SIDE SHOWN)

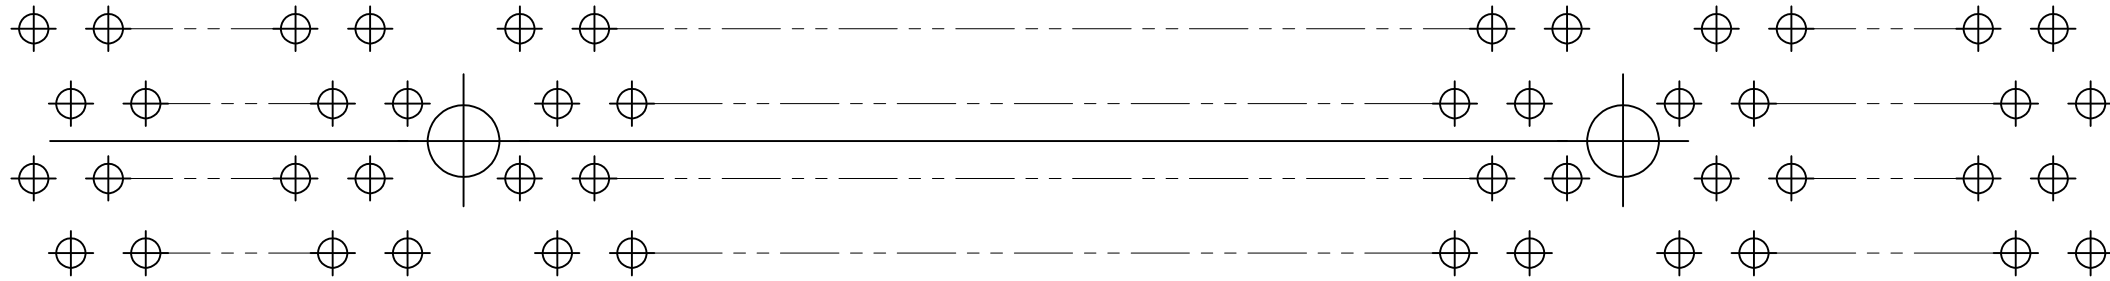


RECOMMENDED CONNECTOR MOUNTING HOLE PATTERN B
(CONNECTOR SIDE SHOWN)

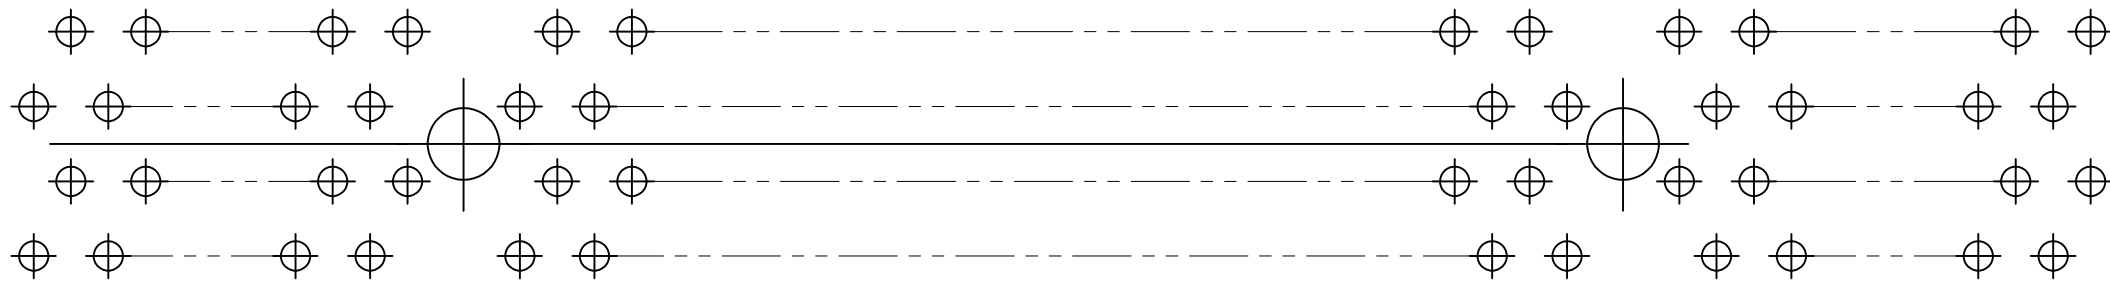

RECOMMENDED CONNECTOR MOUNTING HOLE PATTERN C
(CONNECTOR SIDE SHOWN)

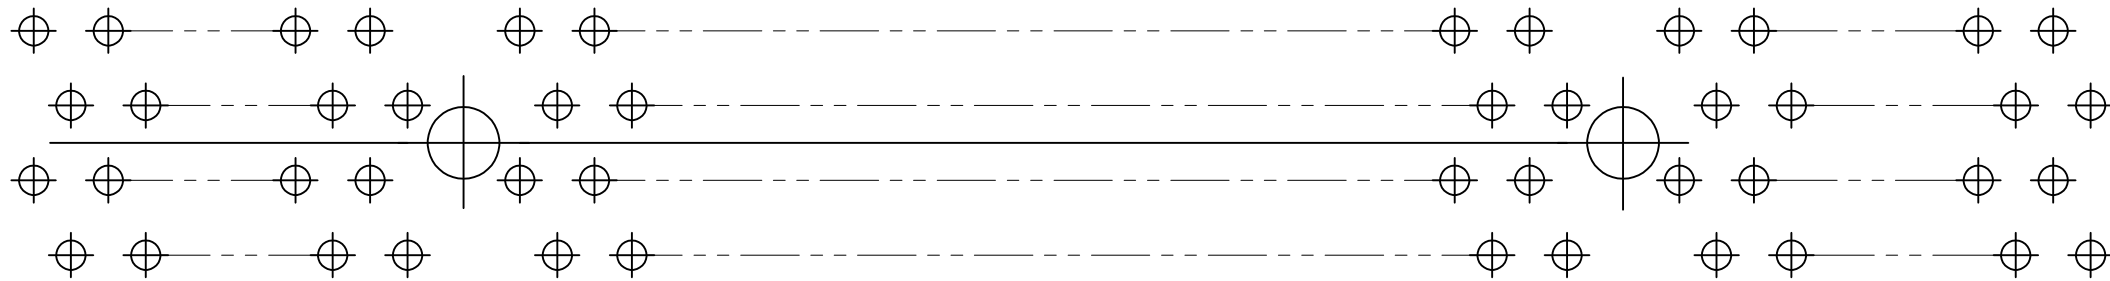

RECOMMENDED CONNECTOR MOUNTING HOLE PATTERN D
(CONNECTOR SIDE SHOWN)

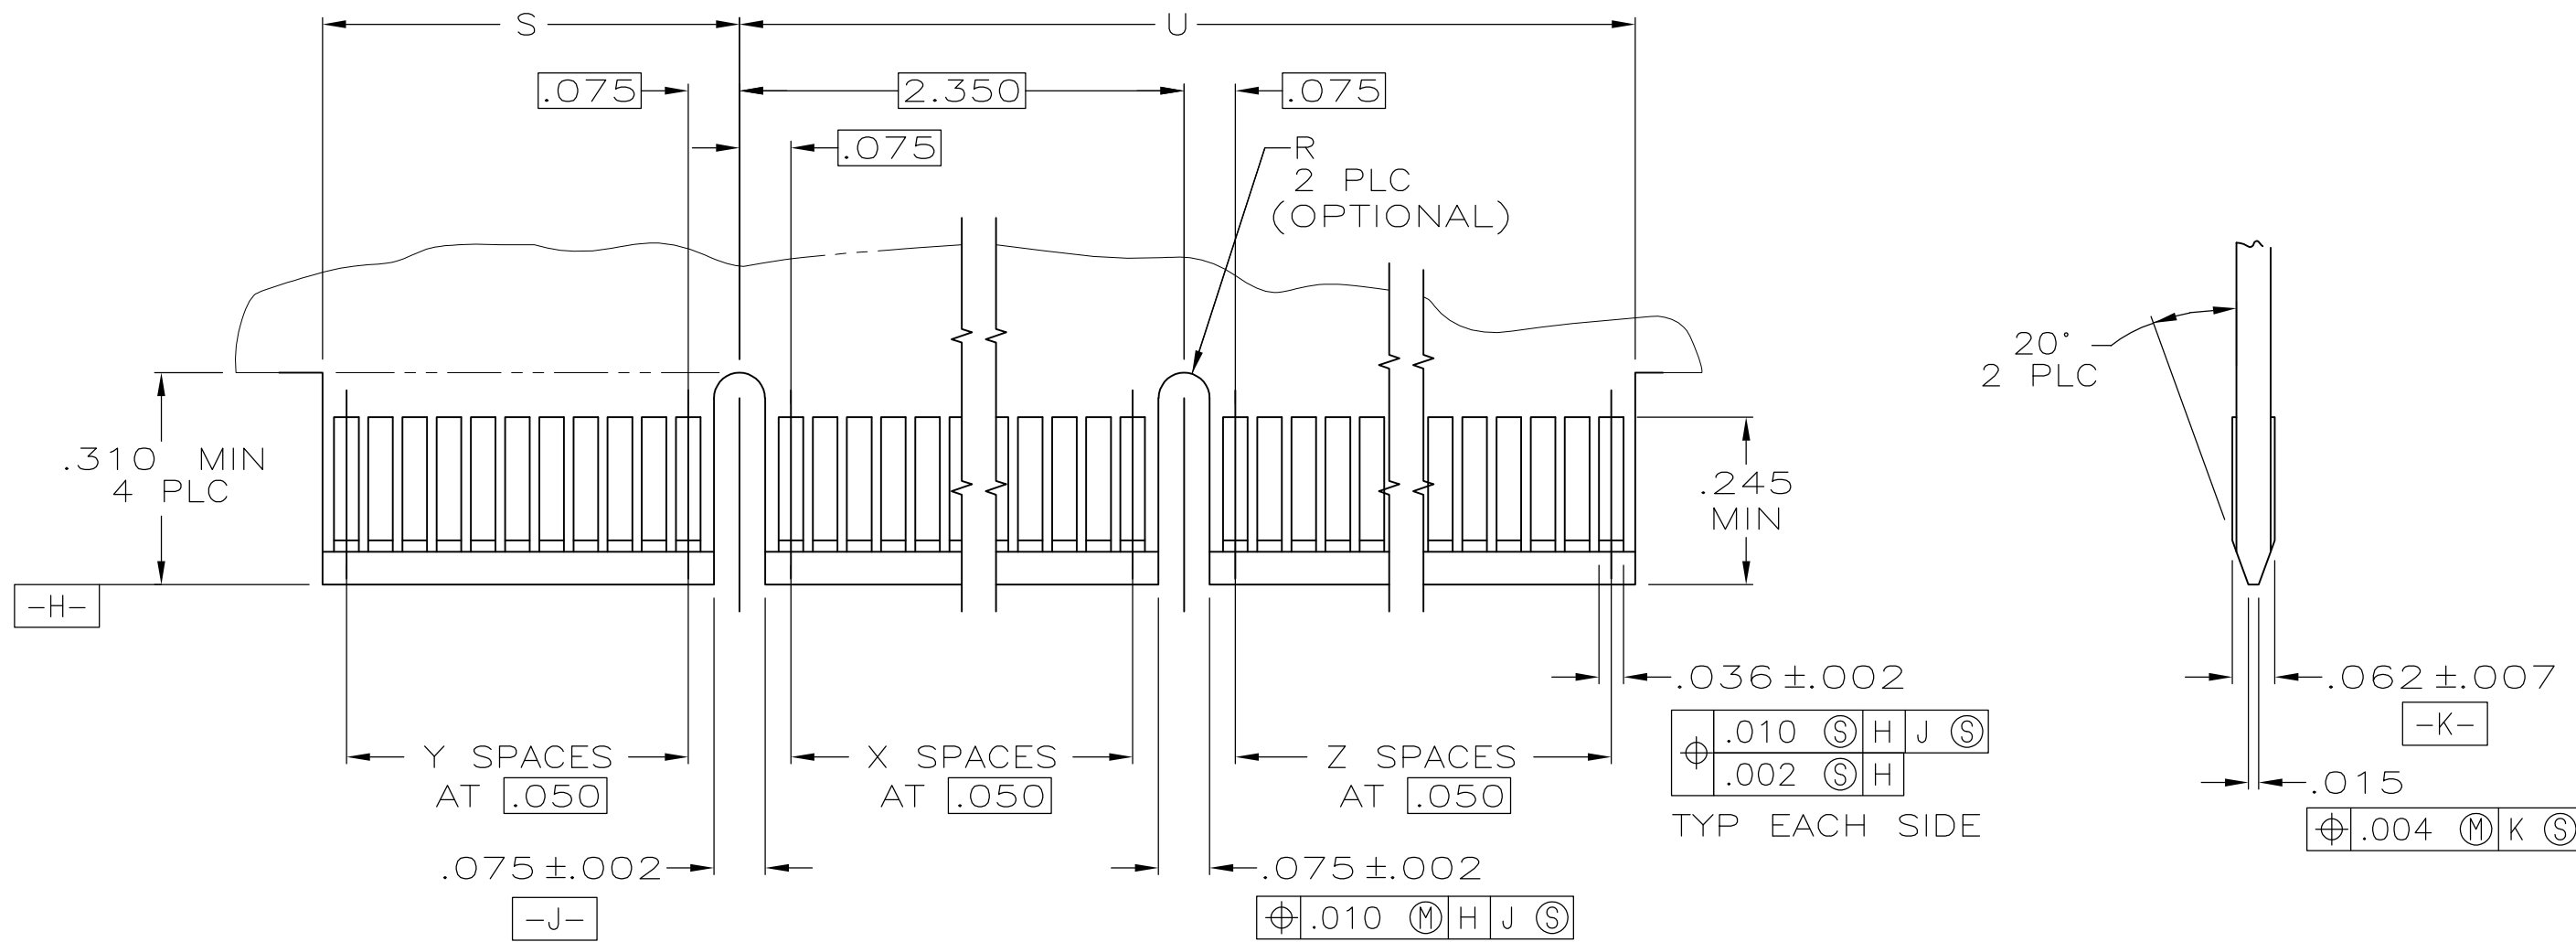

RECOMMENDED MATING BOARD EDGE CONFIGURATION

DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN mm [INCHES] TOLERANCES ON : 2 PLC DEC ± .01 3 PLC DEC ± .005 ANGLES ± 2"		DR 3/22/91 K.L.CLOUSER/UTA		AMP AMP Incorporated Harrisburg, PA 17105-3608		
MATERIAL HOUSING:  CONTACT: 		CHK 7-22-91 M. BOWERS		NAME CONNECTOR ASSEMBLY, DUAL POSITION, .050 SERIES, STANDARD EDGE		
		APPD 7-22-91 M. BOWERS				
		APPD 7-23-91 M. THUMMA				
		PRODUCT SPEC 108-14034				
FINISH CONTACT: 		APPLICATION SPEC 114-26012		SIZE 	CAGE CODE 00779	DRAWING NO 650231
		WEIGHT _		SCALE 4:1		SHEET 2 OF 2

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-650231-0](#)