

MICRO SWITCH
a Honeywell Division

FED. MFG. CODE 91929

SWITCH - BASIC



CATALOG LISTING

V3L-3296

CQ-X2787


CATALOG LISTING
V3L-3296
 M
 ISSUE 3
 REVISIONS
 A PR-1606
 MAM
 10 DEC 87
 B CQ-76298
 JAK
 11 NOV 93
 CHECK
 12 DEC 87
 GLH
 CHECK
 10 DEC 87
 MAM
 DRAWN
 DDM/CAD

REPLACES
 RELEASE NO. PR-16061
 CHECK
 12 DEC 87
 CHECK
 10 DEC 87

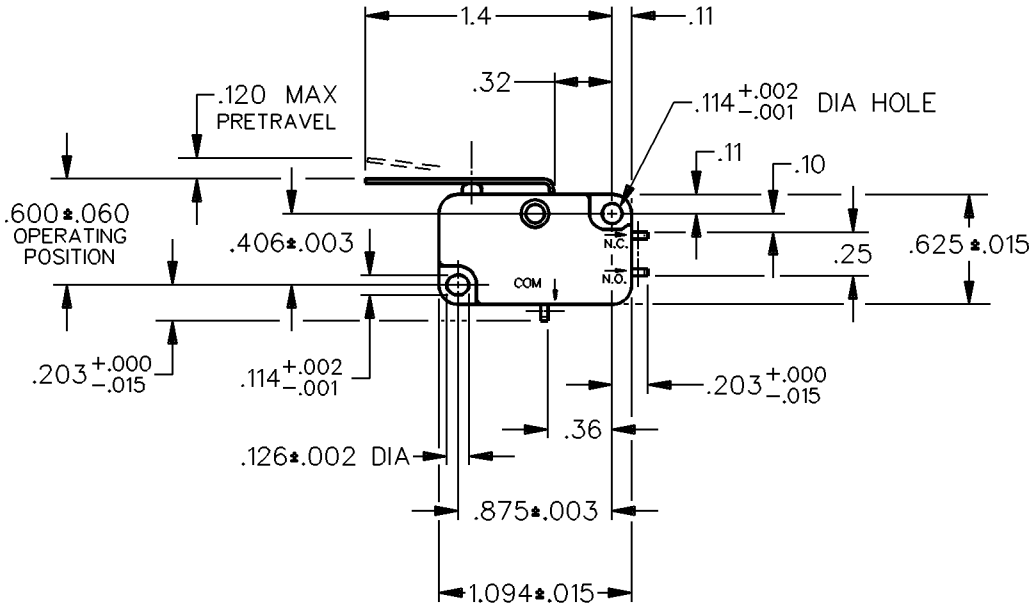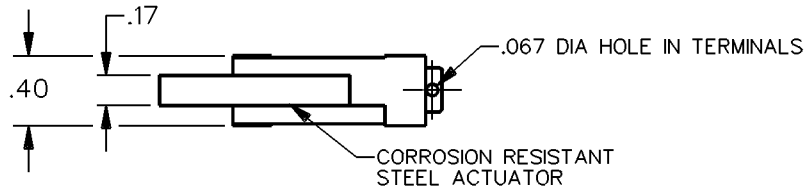

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS	ELECTRICAL DATA CONTACT ARRANGEMENT S P D T	SCALE	FULL	DO NOT SCALE PRINT
		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE		
OPERATING FORCE — — — 88 GRAM MAX	L83 15.1A 1/2HP 125, 250 VAC 1/2A 125 VDC, 1/4A 250 VDC 5A 125 VAC "L"	ONE PLACE	(.0)	±.030
RELEASE FORCE — — — 6 GRAM MIN		TWO PLACE	(.00)	±.015
DIFFERENTIAL TRAVEL — — — .032 MAX		THREE PLACE	(.000)	±.005
OVERTRAVEL — — — .090 MIN		ANGLES		±
RELEASE TRAVEL — — — .017 MIN		WEIGHT		



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Honeywell:](#)

[V3L-3296](#)