



4805 (3/11)

CONVERSION TABLE

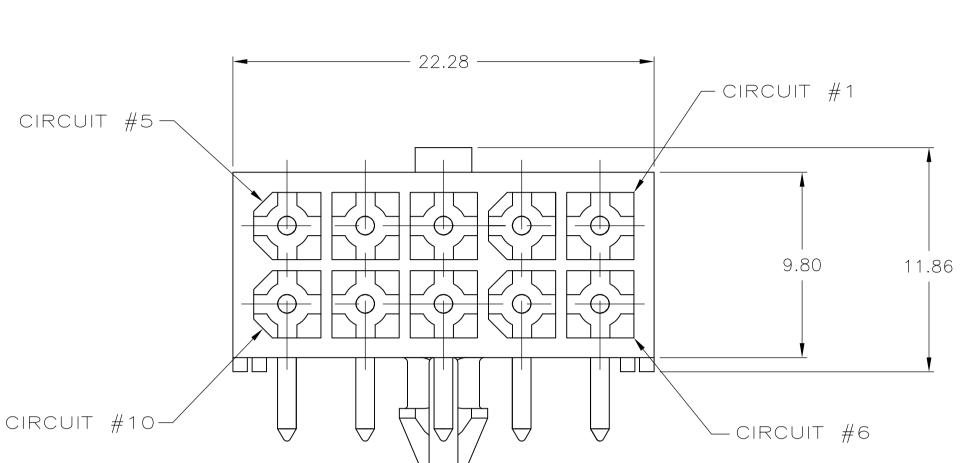



2. N 3 4 $\sqrt{5}$ 6 $\overline{7}$ 8

	2	1												
	LOC DIST REVISIONS													
		DATE	DWN	APVD										
	H REVISED PER ECR-15-010337	H REVISED PER ECR-15-010337 23JUL2015 RK SC												
1.	PINS TO COMPLY WITH AMP SOLDERABILITY													
	SPEC 109-11-3.													
2.	MATES WITH PLUG P/N 770580-1.													
$\sqrt{3}$	COORDINATE DIMENSION APPLIES FROM CENTER OF ACTUAL FEATURE.													
4	RECOMMENDED FOR EDGE MOUNTING.													
5	0.00381 MIN MATTE TIN LEAD OVER 0.00127 MIN NICKEL ENTIRE LENGTH OF PIN.													
6	0.00076 MIN GOLD PLATE IN THE LOCALIZED PLATE AREA, 0.00381 MIN MATTE TIN LEAD IN THE LOCALIZED PLATE AREA, BOTH OVER 0.00127 MIN NICKEL.													
<u>_7</u>	0.00381 MIN MATTE TIN OVER 0.00127 MIN NICKEL ENTIRE LENGTH OF PIN.													

0.00076 MIN GOLD PLATE IN THE LOCALIZED GOLD PLATE AREA, 0.00381 MIN MATTE TIN IN THE LOCALIZED TIN PLATE AREA, BOTH OVER 0.00127 MIN NICKEL.

		BRASS	8	N	YLON,	UL94V-	-0	WHIT	E	1-770	)97	1-1	
[		BRASS	RASS		NYLON, UL94V-0 WH			WHIT	Ē	1-770971-0			
		BRASS	ASS 6		NYLON, UL94V-0			WHIT	Ē	770971-2			
		BRASS	5	N	YLON,	UL94V-	-0	WHIT	Ē	7709	70971-1		
		MATERIAL	FINISH PIN		MATE	RIAL HOUSING		COLO	R	PAR	PART NO.		
CONTROLLED DOCUMENT. CONTROLLED DOCUMENT. CHK 24JUL03 CHK 24JUL03 C. JONES			TE Connectivity										
TOLERANCES UNLESS OTHERWISE SPECIFIEI   0 PLC   1 PLC   2 PLC   3 PLC   4 0.13		C. JON C. JON PRODUCT SPI	APVD 24JUL03 C. JONES PRODUCT SPEC APPLICATION SPEC			NAME HEADER ASSEMBLY, RIGHT ANGLE, WITH SHORT PEG, 10 CIRCUIT, MINI UNIVERSAL MATE-N-LOK(TM)							
	4 PLC $\pm$ – ANGLES $\pm$ –				CAGE CODE	DRAWING NO					RESTR	RICTED TO	
	FINISH SEE TABLE	WEIGHT	—	A1	00779	C = 770	0971	1				—	
CUSTOMER DRAWING							SCALE	5.1	SHEE	T OF	1 R	EV	

В

## **Mouser Electronics**

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TE Connectivity: <u>1-770971-0</u>