


## Features

- Low Forward Voltage Drop
- Fast Switching
- Very High Density (Five Diode Elements in a Sub-Miniature Package)
- **Lead Free/RoHS Compliant (Note 1)**
- **"Green" Device (Note 2)**
- **Qualified to AEC-Q101 Standards for High Reliability**


## Mechanical Data

- Case: DFN1616-6
- Case Material: Molded Plastic, "Green" Molding Compound. UL Flammability Classification Rating 94V-0
- Moisture Sensitivity: Level 1 per J-STD-020D
- Terminals: Solderable per MIL-STD-202, Method 208
- Lead Free Plating (NiPdAu Finish over Copper leadframe).
- Polarity: Pin 1 Dot and Center Pad notch, See diagram
- Marking Information: See Page 2
- Ordering Information: See Page 2
- Weight: 0.004 grams (approximate)

DFN1616-6



BOTTOM VIEW


 TOP VIEW  
Internal Schematic

## Maximum Ratings @ $T_A = 25^\circ\text{C}$ unless otherwise specified

| Characteristic                            | Symbol       | Value                  | Unit |   |
|---|--------------|------------------------|------|---|
| Non-Repetitive Peak Reverse Voltage       | $V_{RM}$     | 100                    | V    |   |
| Peak Repetitive Reverse Voltage           | $V_{RRM}$    | 75                     | V    |   |
| Working Peak Reverse Voltage              | $V_{RWM}$    |                        |      |   |
| DC Blocking Voltage                       | $V_R$        |                        |      |   |
| RMS Reverse Voltage                       | $V_{R(RMS)}$ | 53                     | V    |   |
| Forward Continuous Current                | $I_{FM}$     | 300                    | mA   |   |
| Average Rectified Output Current          | $I_O$        | 200                    | mA   |   |
| Non-Repetitive Peak Forward Surge Current | $I_{FSM}$    | @ $t = 1.0\mu\text{s}$ | 2.0  | A |
|   |              | @ $t = 1.0\text{s}$    | 1.0  |   |

## Thermal Characteristics

| Characteristic                                      | Symbol          | Value       | Unit               |
|---|-----------------|-------------|--------------------|
| Power Dissipation (Note 3)                          | $P_D$           | 500         | mW                 |
| Thermal Resistance Junction to Ambient Air (Note 3) | $R_{\theta JA}$ | 256         | $^\circ\text{C/W}$ |
| Operating and Storage Temperature Range             | $T_J, T_{STG}$  | -65 to +150 | $^\circ\text{C}$   |

## Electrical Characteristics @ $T_A = 25^\circ\text{C}$ unless otherwise specified

| Characteristic                     | Symbol      | Min | Max   | Unit          | Test Condition  |
|------------------------------------|-------------|-----|-------|---------------|---|
| Reverse Breakdown Voltage (Note 4) | $V_{(BR)R}$ | 75  | —     | V             | $I_R = 100\mu\text{A}$  |
| Forward Voltage                    | $V_F$       | —   | 0.715 | V             | $I_F = 1.0\text{mA}$  |
|                                    |             |     | 0.855 |               | $I_F = 10\text{mA}$   |
|                                    |             |     | 1.0   |               | $I_F = 50\text{mA}$   |
|                                    |             |     | 1.25  |               | $I_F = 150\text{mA}$  |
| Leakage Current (Note 4)           | $I_R$       | —   | 1.0   | $\mu\text{A}$ | $V_R = 75\text{V}$  |
|                                    |             |     | 50    |               | $V_R = 75\text{V}, T_J = 150^\circ\text{C}$                         |
|                                    |             |     | 30    |               | $V_R = 25\text{V}, T_J = 150^\circ\text{C}$                         |
|                                    |             |     | 25    |               | $V_R = 20\text{V}$  |
| Total Capacitance                  | $C_T$       | —   | 2.0   | pF            | $V_R = 0, f = 1.0\text{MHz}$  |
| Reverse Recovery Time              | $t_{rr}$    | —   | 4.0   | ns            | $I_F = I_R = 10\text{mA}, I_{rr} = 0.1 \times I_R, R_L = 100\Omega$ |

- Notes:
1. No Purposefully added Lead.
  2. Diodes Inc.'s "Green" policy can be found on our website at [http://www.diodes.com/products/lead\\_free/index.php](http://www.diodes.com/products/lead_free/index.php).
  3. Part mounted on FR-4 PC board with recommended pad layout, which can be found on our website at <http://www.diodes.com/datasheets/ap02001.pdf>. Only one switching diode powered on.
  4. Short duration pulse test used to minimize self-heating effect.

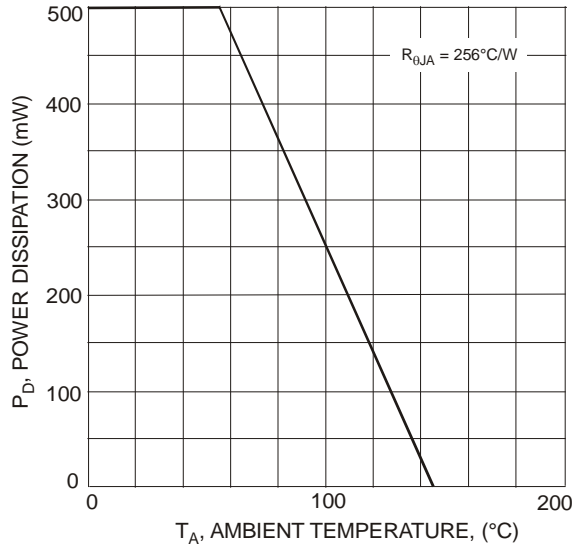


Fig. 1 Power Derating Curve

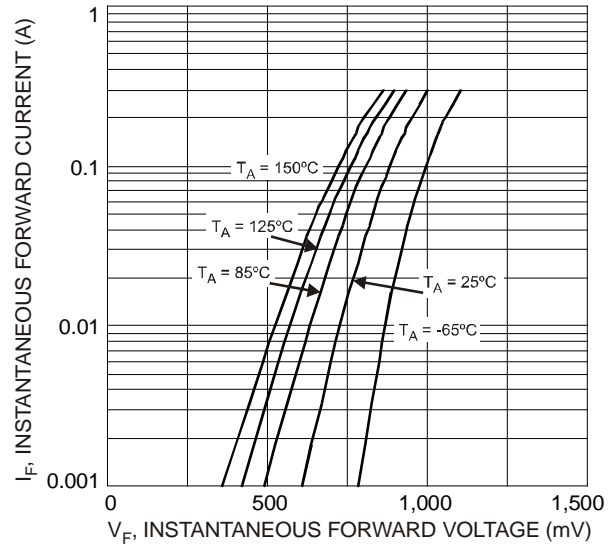


Fig. 2 Typical Forward Characteristics

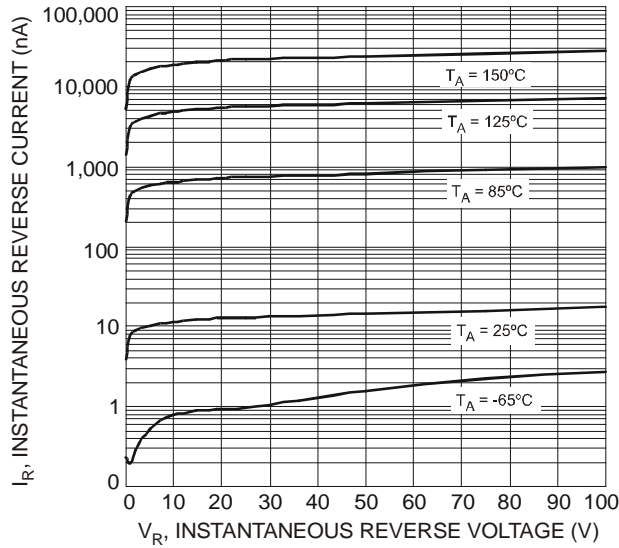


Fig. 3 Typical Reverse Characteristics

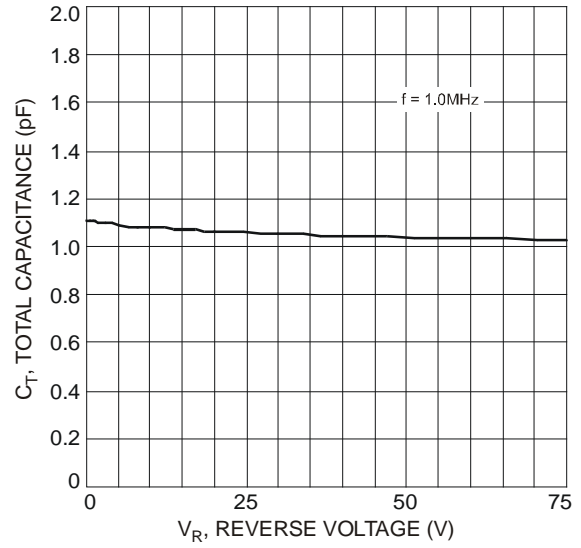



Fig. 4 Typical Capacitance vs. Reverse Voltage

**Ordering Information** (Note 5)

| Part Number   | Case      | Packaging        |
|---------------|-----------|------------------|
| MMBD4148PLM-7 | DFN1616-6 | 3000/Tape & Reel |

Notes: 5. For packaging details, go to our website at <http://www.diodes.com/datasheets/ap02007.pdf>.

**Marking Information**




AP6 = Product Type Marking Code  
 YM = Date Code Marking  
 Y = Year ex: V = 2008  
 M = Month ex: 9 = September


Date Code Key

| Year | 2008 | 2009 | 2010 | 2011 | 2012 | 2013 | 2014 | 2015 |
|------|------|------|------|------|------|------|------|------|
| Code | V    | W    | X    | Y    | Z    | A    | B    | C    |

| Month | Jan | Feb | Mar | Apr | May | Jun | Jul | Aug | Sep | Oct | Nov | Dec |
|-------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| Code  | 1   | 2   | 3   | 4   | 5   | 6   | 7   | 8   | 9   | O   | N   | D   |

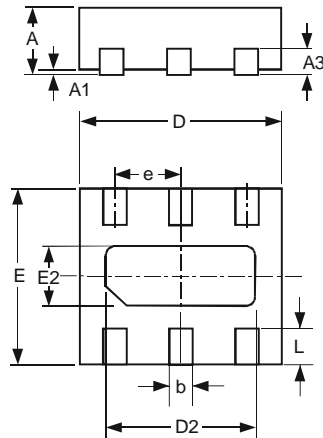**Package Outline Dimensions**


| DFN1616-6            |       |       |       |
|----------------------|-------|-------|-------|
| Dim                  | Min   | Max   | Typ   |
| A                    | 0.545 | 0.605 | 0.575 |
| A1                   | 0     | 0.05  | 0.02  |
| A3                   | —     | —     | 0.13  |
| b                    | 0.20  | 0.30  | 0.25  |
| D                    | 1.55  | 1.675 | 1.60  |
| D2                   | 1.10  | 1.30  | 1.20  |
| E                    | 1.55  | 1.675 | 1.60  |
| e                    | —     | —     | 0.50  |
| E2                   | 0.30  | 0.50  | 0.40  |
| L                    | 0.275 | 0.375 | 0.325 |
| All Dimensions in mm |       |       |       |

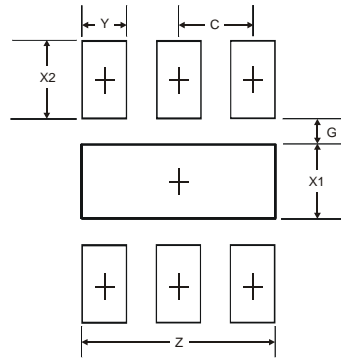**Suggested Pad Layout**


| Dimensions | Value (in mm) |
|------------|---------------|
| Z          | 1.3           |
| G          | 0.175         |
| X1         | 0.50          |
| X2         | 0.525         |
| Y          | 0.30          |
| C          | 0.50          |

**IMPORTANT NOTICE**

Diodes Incorporated and its subsidiaries reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to any product herein. Diodes Incorporated does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on our website, harmless against all damages.

**LIFE SUPPORT**

Diodes Incorporated products are not authorized for use as critical components in life support devices or systems without the expressed written approval of the President of Diodes Incorporated.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Diodes Incorporated:](#)

[MMBD4148PLM-7](#)