


2009

RELEASED FOR PUBLICATION

THIS DRAWING IS UNPUBLISHED.


ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS				
P	LTR	DESCRIPTION		DATE	DWN	APVD
E	B	A1	REVISED PER ECO-11-005150		28APR11	RK HMR

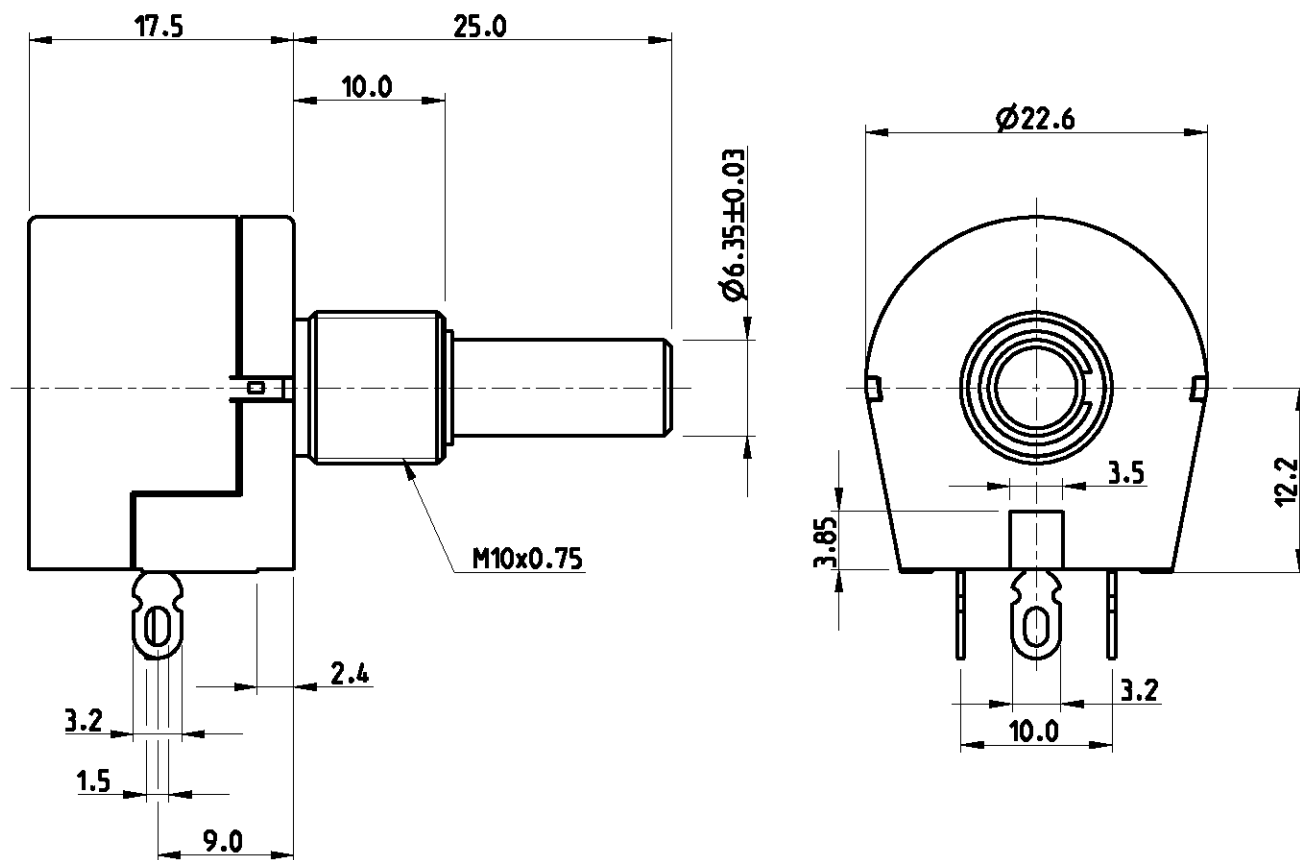


RoHS Compliant

FOR FURTHER INFORMATION SEE DATA SHEET FOR
SERIES TW - WIRE WOUND SPINDLE OPERATED POTENTIOMETER



SCALE 1:1

DIMENSIONS:		DWN	08-JAN-09	MATERIAL	-	FINISH	-
mm		SUBHASH.M	08-JAN-09	 TE Connectivity			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		CHK	08-JAN-09				
0 PLC ±0.2		ALLAN.P	08-JAN-09				
1 PLC ±0.1		APVD	08-JAN-09	WIRE WOUND SPINDLE OPERATED POTENTIOMETER SERIES TW			
2 PLC ±		STEPHEN.P	08-JAN-09				
3 PLC ±		PRODUCT SPEC	-				
4 PLC ±		APPLICATION SPEC	-	NAME	WIRE WOUND SPINDLE OPERATED POTENTIOMETER SERIES TW		
ANGLES ±5°		WEIGHT	-	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
				A 4	00779	C-1676979	-
CUSTOMER DRAWING				SCALE	2:1	SHEET 1 OF 1	REV A1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[TW1100KA](#)