


2mm Discrete LED Diffused

Dialight

521-9630, -9631, -9632

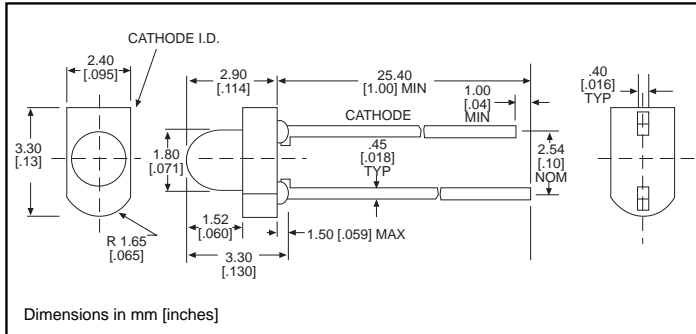

PART NO.

521-9630

521-9631

521-9632

COLOR

Red

Yellow

Green

3

ABSOLUTE MAXIMUM RATINGS (T_A=25°C)

	Red -9630	Yellow -9631	Green -9632
Power Dissipation (mW)	100	60	100
Forward Current (mA)	30	20	30
Derating (mA/°C) From 25°C	.4	.25	.4
Peak Current (mA) Pulse width = 10μs	120	80	120
Operating Temperature (°C)	-55/+100	-55/+100	-55/+100
Storage Temperature (°C)	-55/+100	-55/+100	-55/+100
Soldering Temperature	260°C, 5 seconds, 1.6 mm from case		

OPERATING CHARACTERISTICS (T_A=25°C)

		Red -9630	Yellow -9631	Green -9632
Luminous Intensity (mcd)	Min.	3.7	3.7	2.5
	Typical	12.6	12.6	8.7
Peak Wavelength (nm) λ _{Peak}	Typical	635	585	565
Viewing Angle (2θ _{1/2})	Typical	38°	38°	38°
Forward Voltage (V) I _F =20mA	Typical	2	2.1	2.1
	Max.	2.8	2.8	2.8
Reverse Voltage (V), I _R =100μA	Min.	5	5	5

θ_{1/2} is the off axis angle at which the luminous intensity is half the axial luminous intensity

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Dialight:

[571-0132-100F](#) [571-0122-100F](#) [571-0111-100F](#) [571-0122-104F](#) [571-0112F](#) [571-0122F](#) [571-0112-100](#) [571-0112-100F](#) [571-0123-100F](#) [571-0133-100F](#) [571-0102-100F](#) [571-0111-104F](#) [571-0132-102F](#) [571-0113-100F](#) [571-0111-102F](#) [571-0120-100F](#) [571-0133-102F](#) [571-0122-102F](#) [571-0132-104F](#)