


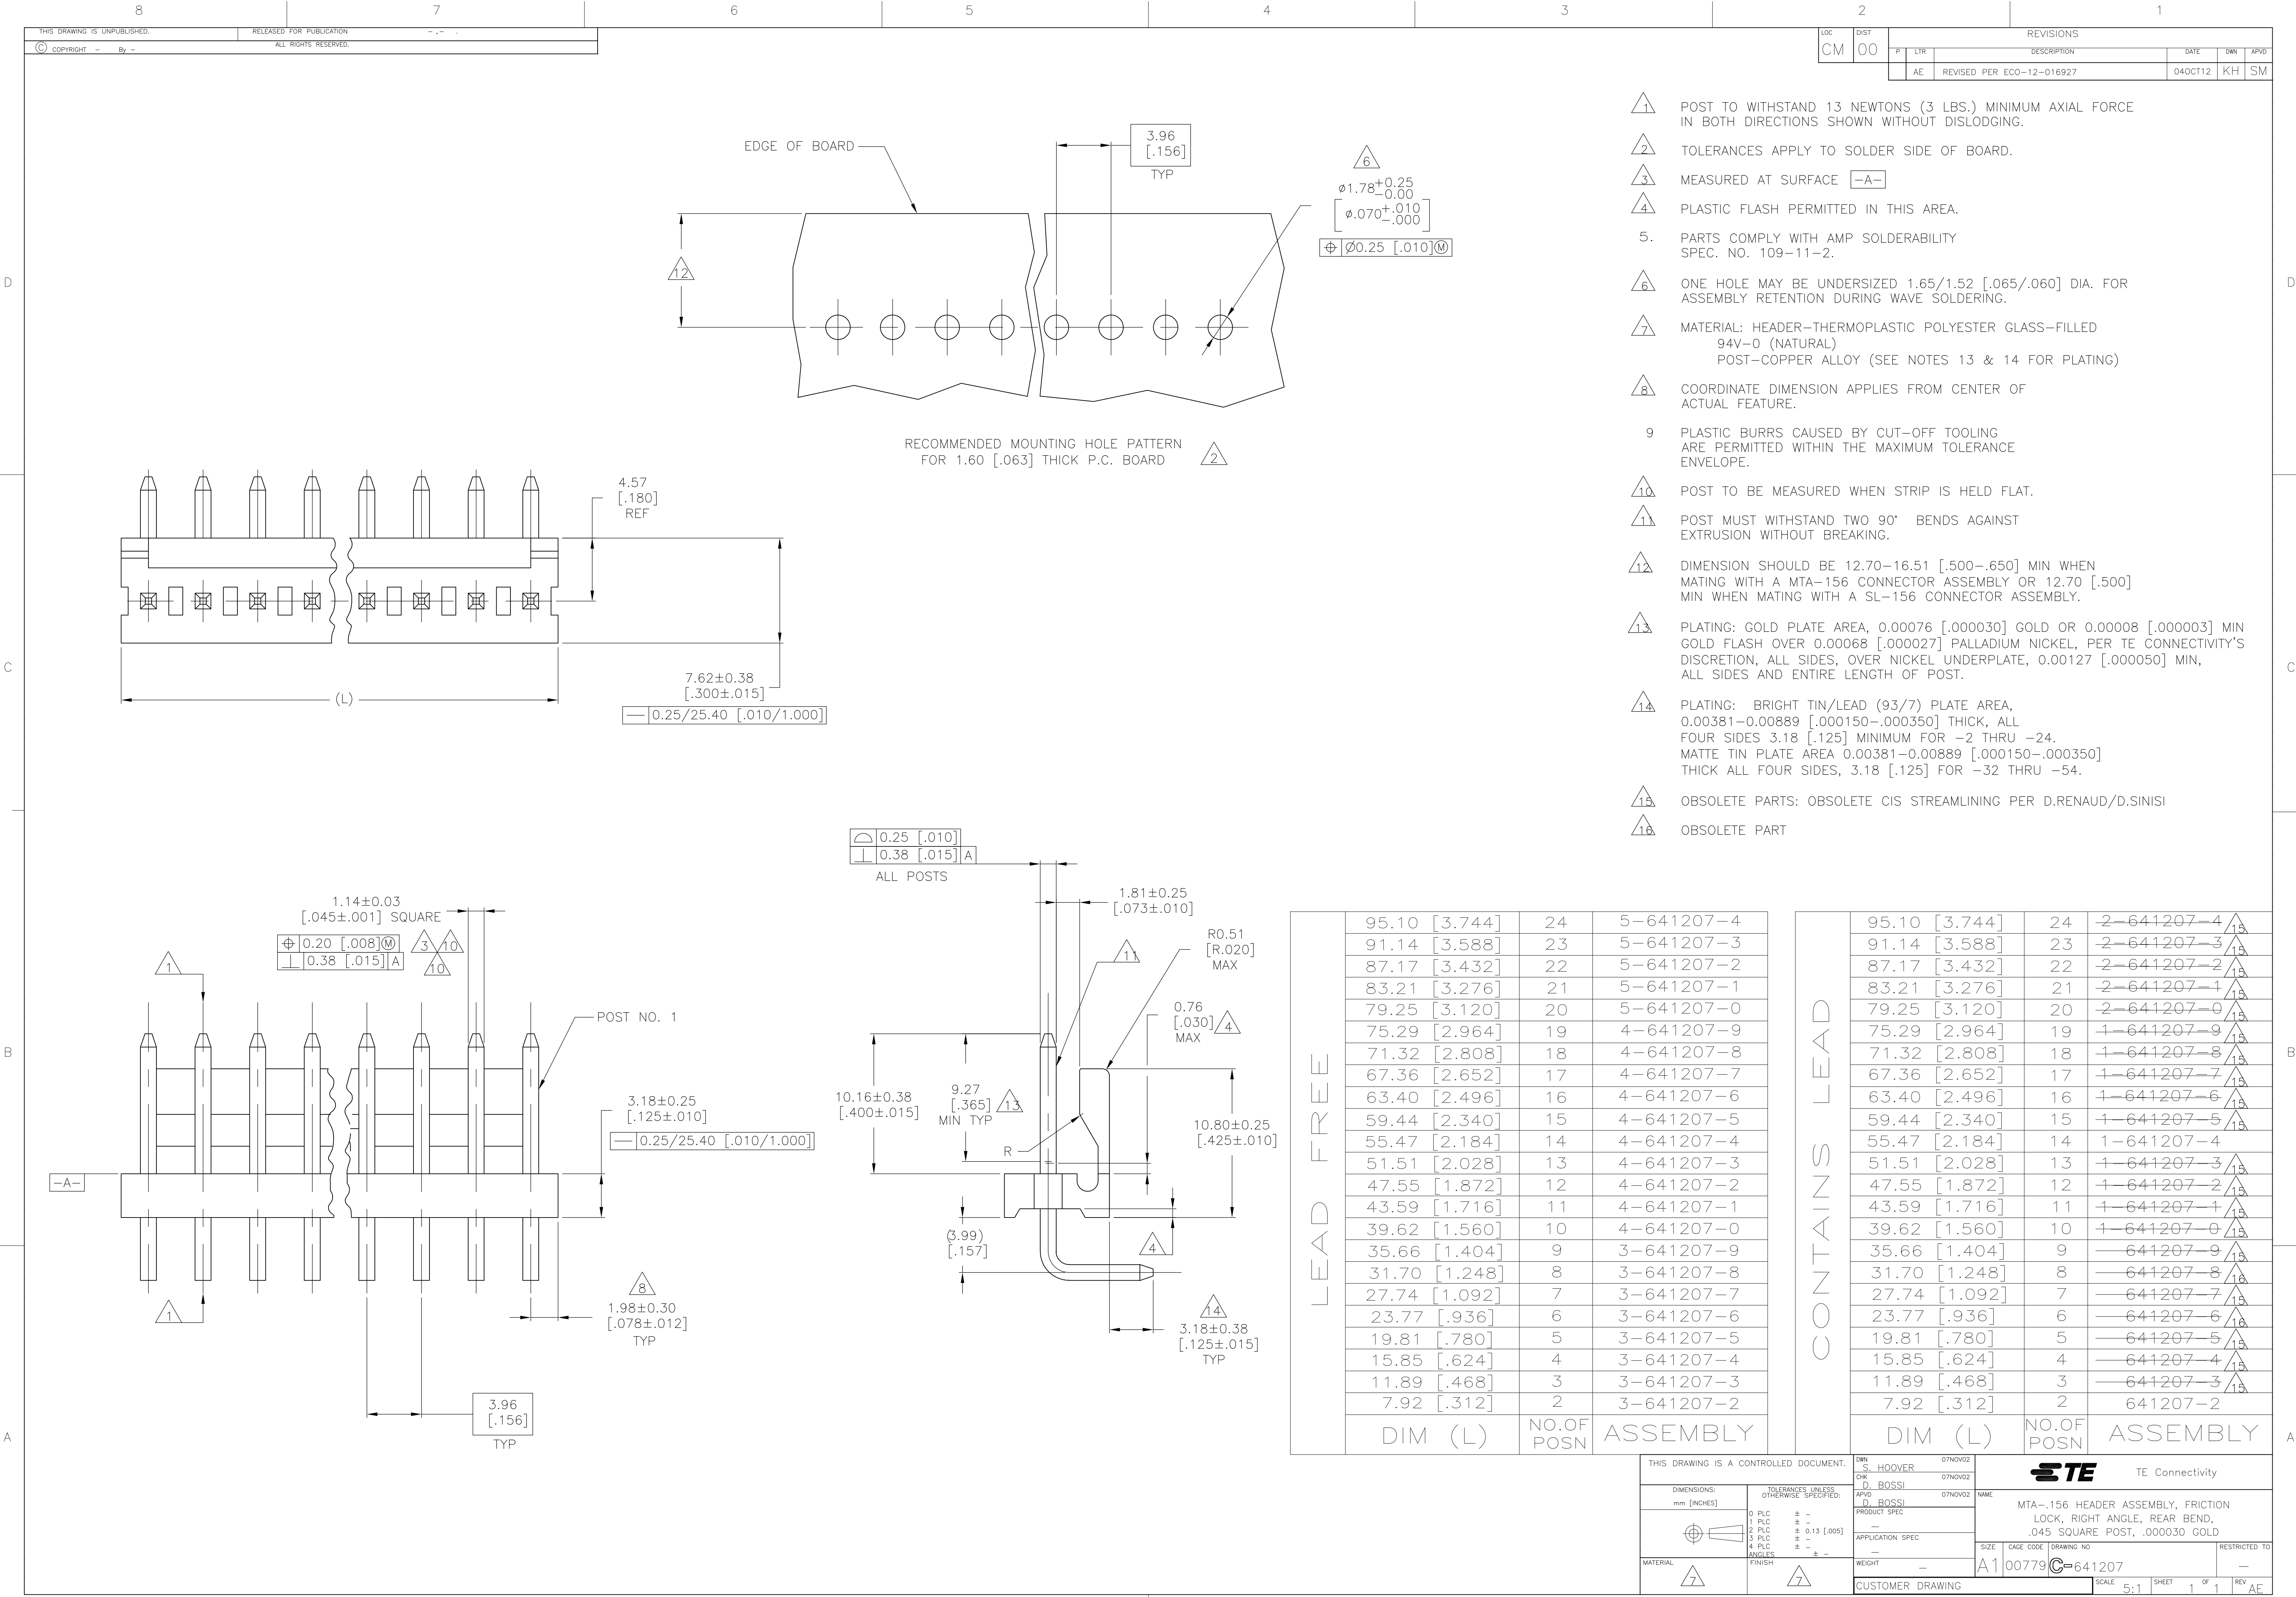

- 1 POST TO WITHSTAND 13 NEWTONS (3 LBS.) MINIMUM AXIAL FORCE IN BOTH DIRECTIONS SHOWN WITHOUT DISLODGING.
- 2 TOLERANCES APPLY TO SOLDER SIDE OF BOARD.
- 3 MEASURED AT SURFACE -A-
- 4 PLASTIC FLASH PERMITTED IN THIS AREA.
5. PARTS COMPLY WITH AMP SOLDERABILITY SPEC. NO. 109-11-2.
- 6 ONE HOLE MAY BE UNDERSIZED 1.65/1.52 [.065/.060] DIA. FOR ASSEMBLY RETENTION DURING WAVE SOLDERING.
- 7 MATERIAL: HEADER-THERMOPLASTIC POLYESTER GLASS-FILLED 94V-0 (NATURAL) POST-COPPER ALLOY (SEE NOTES 13 & 14 FOR PLATING)
- 8 COORDINATE DIMENSION APPLIES FROM CENTER OF ACTUAL FEATURE.
- 9 PLASTIC BURRS CAUSED BY CUT-OFF TOOLING ARE PERMITTED WITHIN THE MAXIMUM TOLERANCE ENVELOPE.
- 10 POST TO BE MEASURED WHEN STRIP IS HELD FLAT.
- 11 POST MUST WITHSTAND TWO 90° BENDS AGAINST EXTRUSION WITHOUT BREAKING.
- 12 DIMENSION SHOULD BE 12.70-16.51 [.500-.650] MIN WHEN MATING WITH A MTA-156 CONNECTOR ASSEMBLY OR 12.70 [.500] MIN WHEN MATING WITH A SL-156 CONNECTOR ASSEMBLY.
- 13 PLATING: GOLD PLATE AREA, 0.00076 [.000030] GOLD OR 0.00008 [.000003] MIN GOLD FLASH OVER 0.00068 [.000027] PALLADIUM NICKEL, PER TE CONNECTIVITY'S DISCRETION, ALL SIDES, OVER NICKEL UNDERPLATE, 0.00127 [.000050] MIN, ALL SIDES AND ENTIRE LENGTH OF POST.
- 14 PLATING: BRIGHT TIN/LEAD (93/7) PLATE AREA, 0.00381-0.00889 [.000150-.000350] THICK, ALL FOUR SIDES 3.18 [.125] MINIMUM FOR -2 THRU -24. MATTE TIN PLATE AREA 0.00381-0.00889 [.000150-.000350] THICK ALL FOUR SIDES, 3.18 [.125] FOR -32 THRU -54.
- 15 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI
- 16 OBSOLETE PART

LEAD FREE	95.10	[3.744]	24	5-641207-4
	91.14	[3.588]	23	5-641207-3
	87.17	[3.432]	22	5-641207-2
	83.21	[3.276]	21	5-641207-1
	79.25	[3.120]	20	5-641207-0
	75.29	[2.964]	19	4-641207-9
	71.32	[2.808]	18	4-641207-8
	67.36	[2.652]	17	4-641207-7
	63.40	[2.496]	16	4-641207-6
	59.44	[2.340]	15	4-641207-5
	55.47	[2.184]	14	4-641207-4
	51.51	[2.028]	13	4-641207-3
	47.55	[1.872]	12	4-641207-2
	43.59	[1.716]	11	4-641207-1
	39.62	[1.560]	10	4-641207-0
	35.66	[1.404]	9	3-641207-9
	31.70	[1.248]	8	3-641207-8
	27.74	[1.092]	7	3-641207-7
	23.77	[.936]	6	3-641207-6
	19.81	[.780]	5	3-641207-5
	15.85	[.624]	4	3-641207-4
	11.89	[.468]	3	3-641207-3
	7.92	[.312]	2	3-641207-2
	DIM (L)		NO.OF POSN	ASSEMBLY

SIZING	95.10	[3.744]	24	2-641207-4	15
	91.14	[3.588]	23	2-641207-3	15
	87.17	[3.432]	22	2-641207-2	15
	83.21	[3.276]	21	2-641207-1	15
	79.25	[3.120]	20	2-641207-0	15
	75.29	[2.964]	19	1-641207-9	15
	71.32	[2.808]	18	1-641207-8	15
	67.36	[2.652]	17	1-641207-7	15
	63.40	[2.496]	16	1-641207-6	15
	59.44	[2.340]	15	1-641207-5	15
	55.47	[2.184]	14	1-641207-4	15
	51.51	[2.028]	13	1-641207-3	15
	47.55	[1.872]	12	1-641207-2	15
	43.59	[1.716]	11	1-641207-1	15
	39.62	[1.560]	10	1-641207-0	15
	35.66	[1.404]	9	641207-9	15
	31.70	[1.248]	8	641207-8	16
	27.74	[1.092]	7	641207-7	15
	23.77	[.936]	6	641207-6	16
	19.81	[.780]	5	641207-5	15
	15.85	[.624]	4	641207-4	15
	11.89	[.468]	3	641207-3	15
	7.92	[.312]	2	641207-2	15
	DIM (L)		NO.OF POSN	ASSEMBLY	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S. HOOVER 07NOV02	TE Connectivity	
DIMENSIONS: mm [INCHES]		CHK D. BOSSI 07NOV02		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD D. BOSSI 07NOV02	NAME	
0 PLC ± -		PRODUCT SPEC		
1 PLC ± -		APPLICATION SPEC		
2 PLC ± 0.13 [.005]		SIZE CAGE CODE DRAWING NO		
3 PLC ± -		WEIGHT		
4 PLC ± -		RESTRICTED TO		
ANGLES ± -		CUSTOMER DRAWING		
FINISH		SCALE 5:1 SHEET 1 OF 1 REV AE		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[3-641207-3](#)