
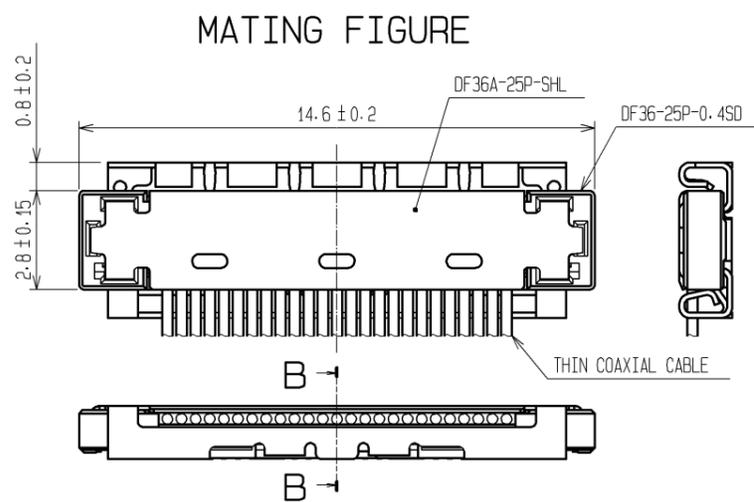
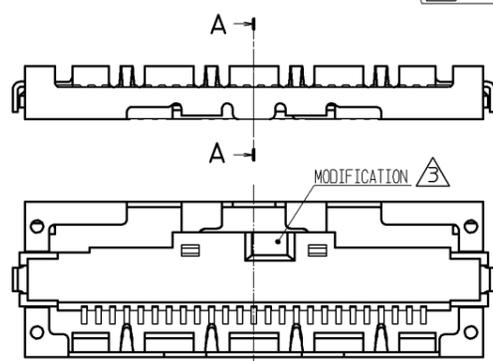


Sep.1.2020 Copyright 2020 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

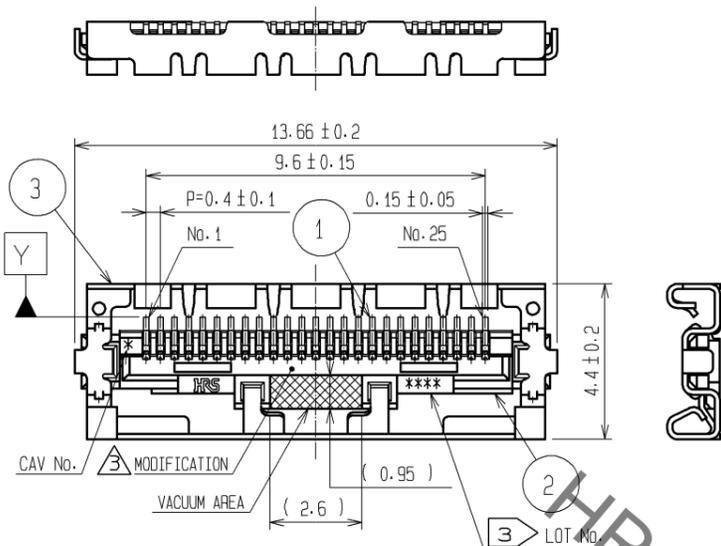


NOTES


- LEAD CO-PLANARITY SHALL BE 0.1mm MAX.
- STIFFENER IS REQUIRED FOR MOUNTING ONTO FPC IN ORDER TO AVOID STRESS BY FPC SLACKING TO MOUNTED CONNECTOR.
- LOT No. INFORMATION IS SHOWN IN THE TABLE.  
EXAMPLE:8GFD  
-YEAR:2008 MONTH:July DAY:15 LINE No. :4
- UNMATING SHALL BE DONE WITH THE SPECIFIC EXTRACTION TOOL.
- SOLDERING REWORK IS NOT POSSIBLE SINCE SOLDERING LEADS ARE COVERED BY METAL SHIELDING.

| YEAR |      | MONTH |      | DAY |      |     |      |     |      | LINE No. |      |
|------|------|-------|------|-----|------|-----|------|-----|------|----------|------|
| YEAR | CODE | MONTH | CODE | DAY | CODE | DAY | CODE | DAY | CODE | LINE No. | CODE |
| 10   | 0    | Jan   | A    | 1   | 1    | 11  | B    | 21  | M    | 1        | A    |
| 11   | 1    | Feb   | B    | 2   | 2    | 12  | C    | 22  | N    | 2        | B    |
| 12   | 2    | Mar   | C    | 3   | 3    | 13  | D    | 23  | P    | 3        | C    |
| 13   | 3    | Apr   | D    | 4   | 4    | 14  | E    | 24  | Q    | 4        | D    |
| 14   | 4    | May   | E    | 5   | 5    | 15  | F    | 25  | R    | 5        | E    |
| 15   | 5    | Jun   | F    | 6   | 6    | 16  | G    | 26  | S    | 6        | F    |
| 16   | 6    | Jul   | G    | 7   | 7    | 17  | H    | 27  | T    | 7        | G    |
| 17   | 7    | Aug   | H    | 8   | 8    | 18  | J    | 28  | U    | 8        | H    |
| 08   | 8    | Sep   | I    | 9   | 9    | 19  | K    | 29  | V    | 9        | I    |
| 09   | 9    | Oct   | J    | 10  | A    | 20  | L    | 30  | W    | 10       | J    |
|      |      | Nov   | K    |     |      | 31  | X    |     |      |          |      |
|      |      | Dec   | L    |     |      |     |      |     |      |          |      |

A-A(FREE)

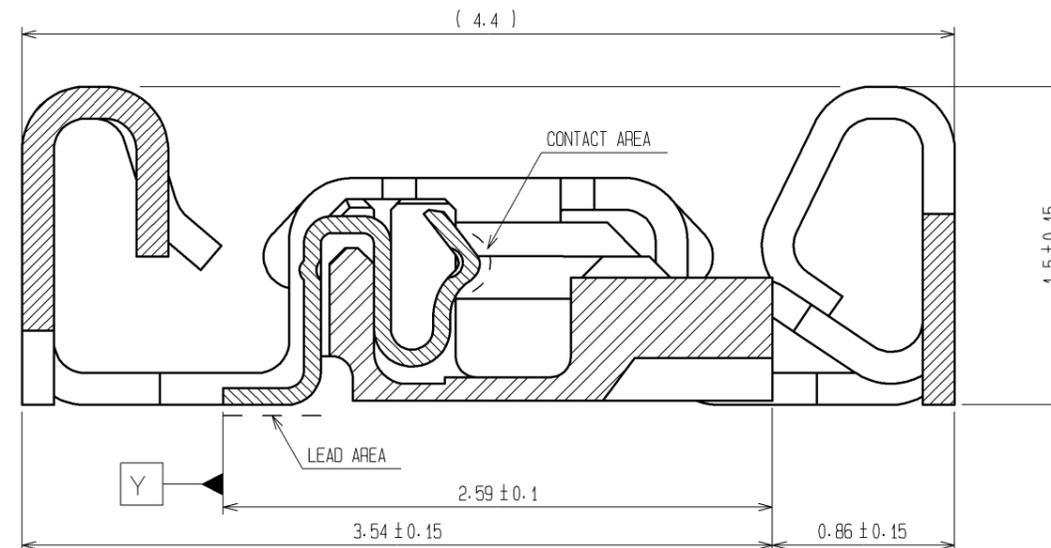

B-B(FREE)

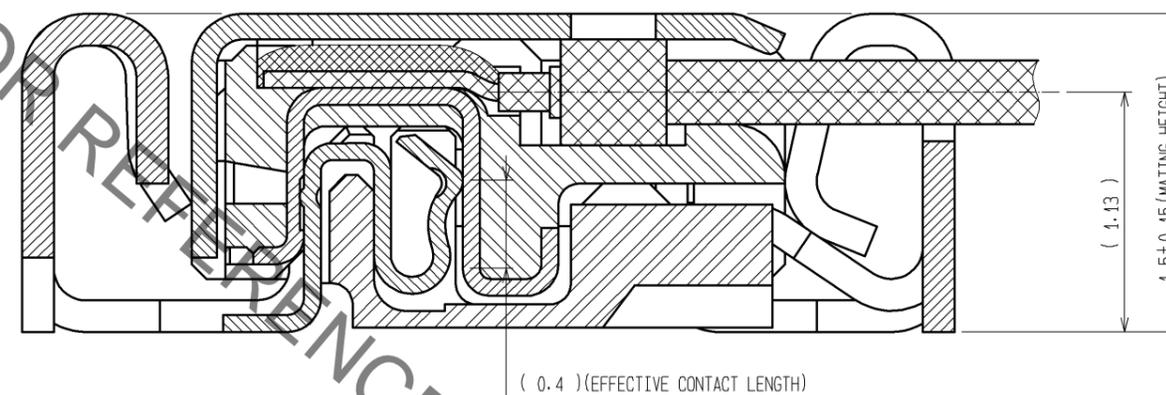

| NO. | MATERIAL        | FINISH | REMARKS   | NO. | MATERIAL        | FINISH | REMARKS   |
|-----|-----------------|--------|---|-----|-----------------|--------|---|
| 2   | LCP             |        | UL94V-0   | 6   | PS              |        | BLACK   |
| 1   | PHOSPHOR BRONZE |        | CONTACT AREA : Au PLATING 0.3µm min<br>LEAD AREA : Au PLATING 0.1µm min<br>UNDER PLATING : Ni PLATING 2µm min | 5   | POLYESTER       |        | CLEAR   |
|     |                 |        |   | 4   | PS              |        | CLEAR   |
|     |                 |        |   | 3   | PHOSPHOR BRONZE |        | WHOLE AREA : Sn PLATING 1µm min<br>UNDER PLATING : Cu PLATING 0.2µm min |


  

| UNITS | SCALE | COUNT | DESCRIPTION OF REVISIONS | DESIGNED     | CHECKED       | DATE     |
|-------|-------|-------|--------------------------|--------------|---------------|----------|
| mm    | 5 : 1 | 2     | DIS-H-003953             | HY. SHIOZAWA | TS. FUKUSHIMA | 09.06.17 |

| APPROVED   | DATE     | DRAWING NO.        |
|------------|----------|--------------------|
| TY. OMA    | 07.01.11 | EDC3-313271-01     |
| CHECED     | DATE     | PART NO.           |
| TS. SAKATA | 07.01.11 | DF36A-25S-0.4V(51) |
| DESIGNED   | DATE     | CODE NO.           |
| MN. KENJO  | 07.01.09 | CL662-4011-4-51    |
| DRAWN      | DATE     |                    |
| MN. KENJO  | 07.01.09 |                    |

Sep.1.2020 Copyright 2020 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

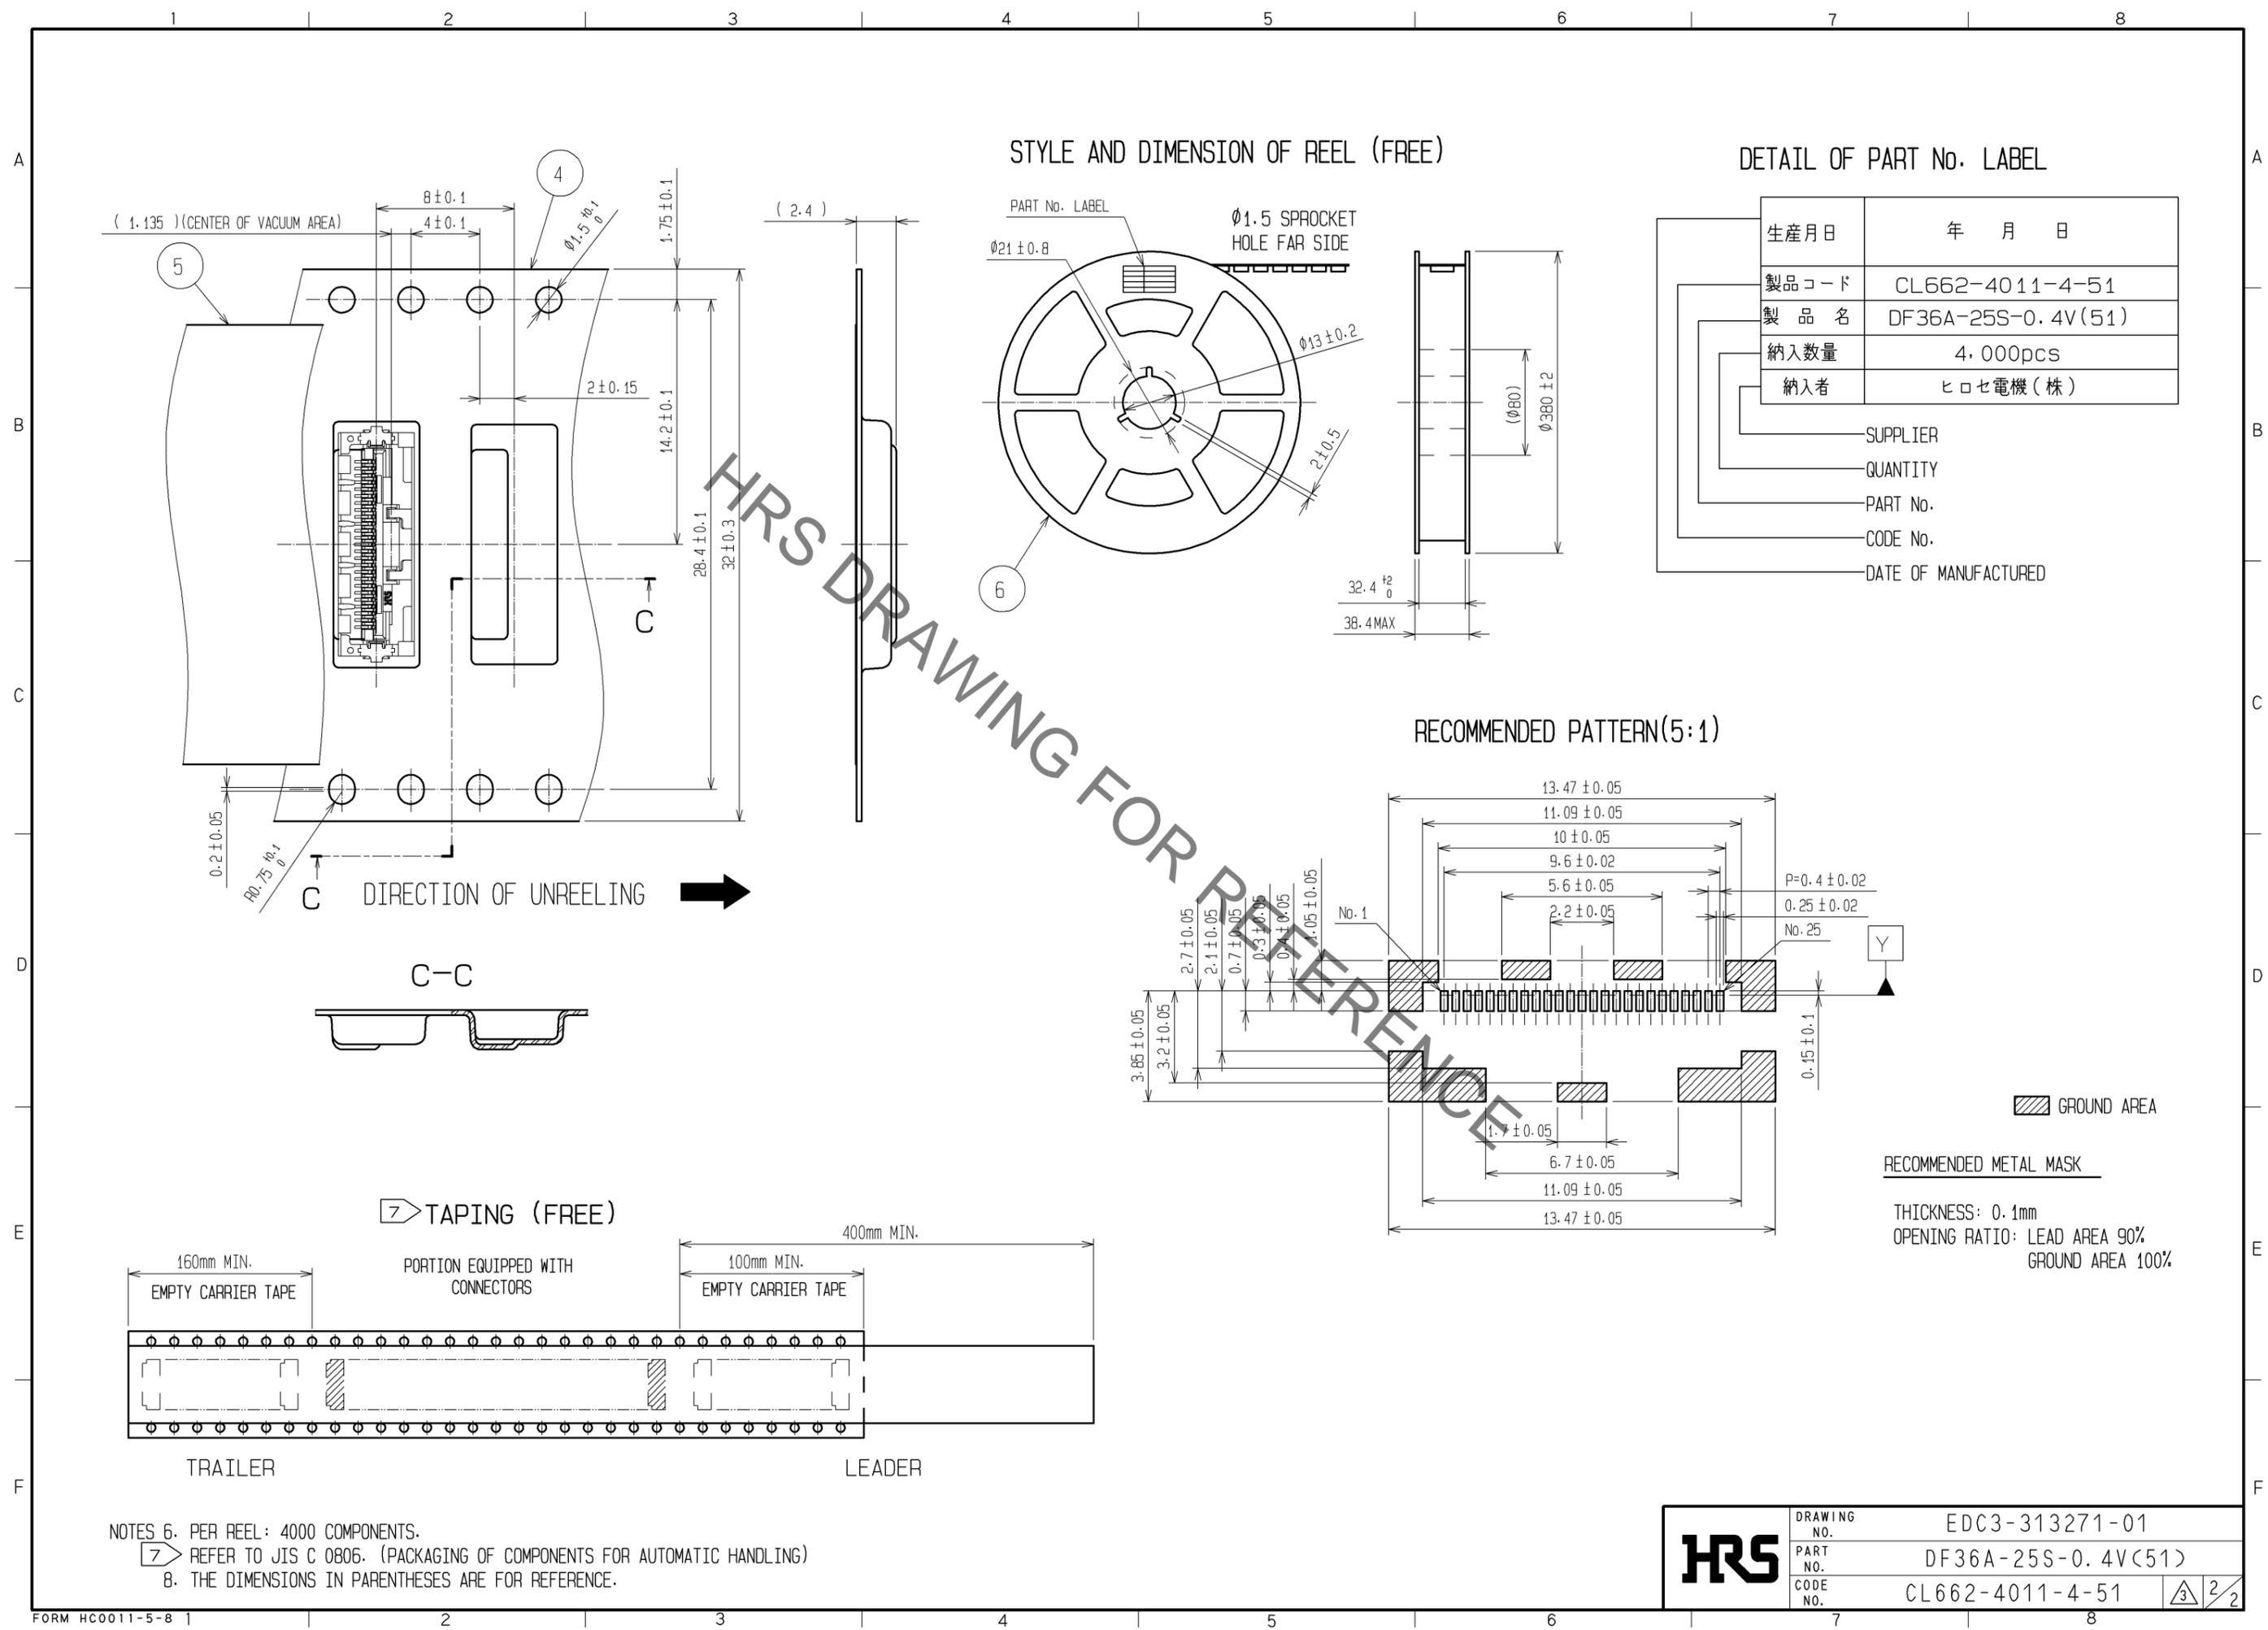


STYLE AND DIMENSION OF REEL (FREE)

DETAIL OF PART No. LABEL

|       |                    |
|-------|--------------------|
| 生産月日  | 年 月 日              |
| 製品コード | CL662-4011-4-51    |
| 製品名   | DF36A-25S-0.4V(51) |
| 納入数量  | 4,000pcs           |
| 納入者   | ヒロセ電機(株)           |


\_\_\_\_\_ SUPPLIER  
 \_\_\_\_\_ QUANTITY  
 \_\_\_\_\_ PART No.  
 \_\_\_\_\_ CODE No.  
 \_\_\_\_\_ DATE OF MANUFACTURED

RECOMMENDED PATTERN(5:1)

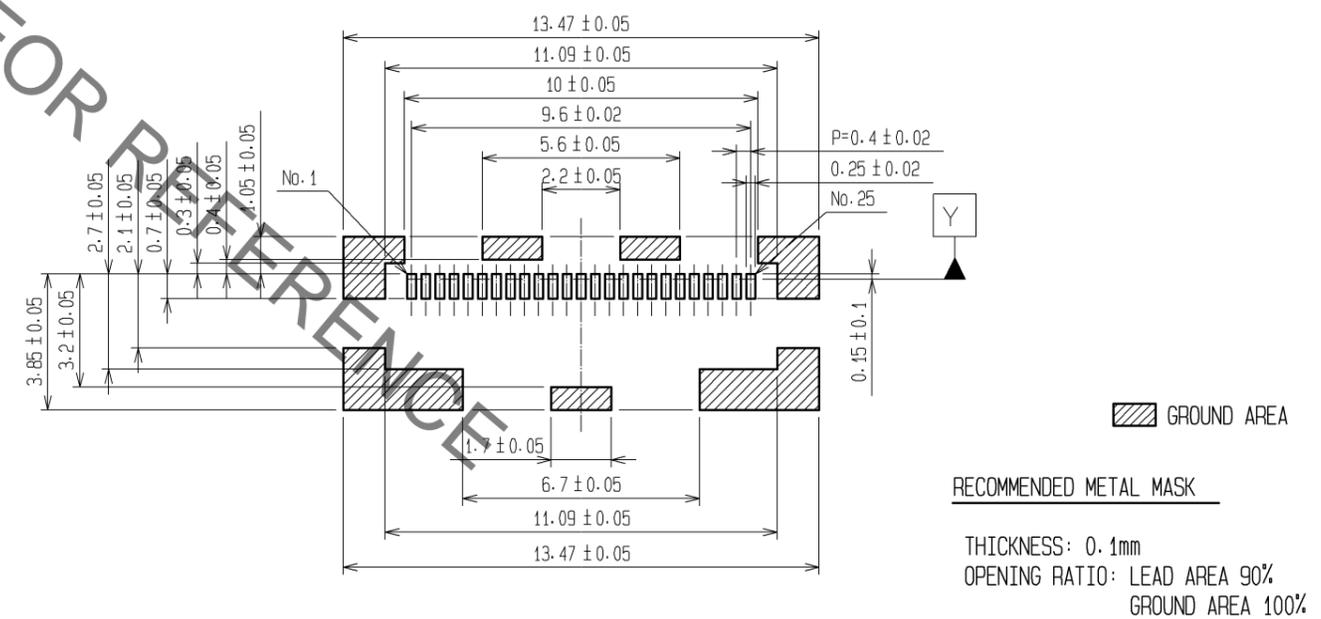

**RECOMMENDED METAL MASK**  
 THICKNESS: 0.1mm  
 OPENING RATIO: LEAD AREA 90%  
 GROUND AREA 100%

TAPING (FREE)

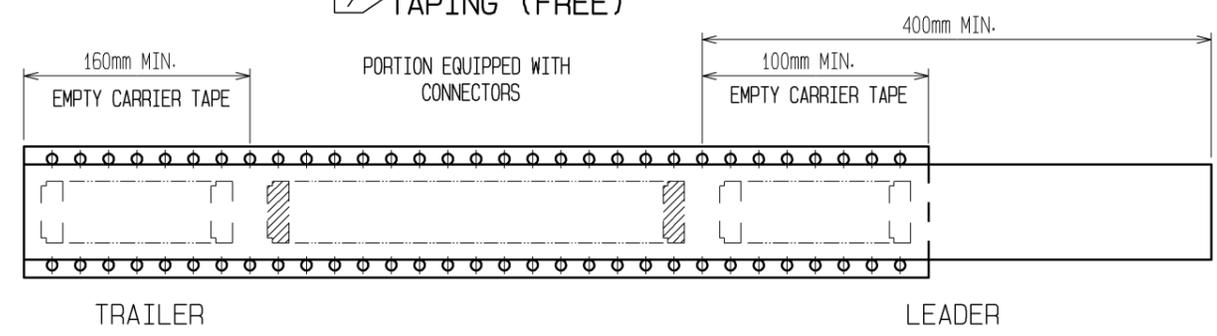

NOTES 6. PER REEL: 4000 COMPONENTS.  
 7. REFER TO JIS C 0806. (PACKAGING OF COMPONENTS FOR AUTOMATIC HANDLING)  
 8. THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

|            |             |                    |
|------------|-------------|--------------------|
| <b>HRS</b> | DRAWING NO. | EDC3-313271-01     |
|            | PART NO.    | DF36A-25S-0.4V(51) |
|            | CODE NO.    | CL662-4011-4-51    |
|            |             | 3/2                |