

**Mallory Sonalert Products, Inc.**

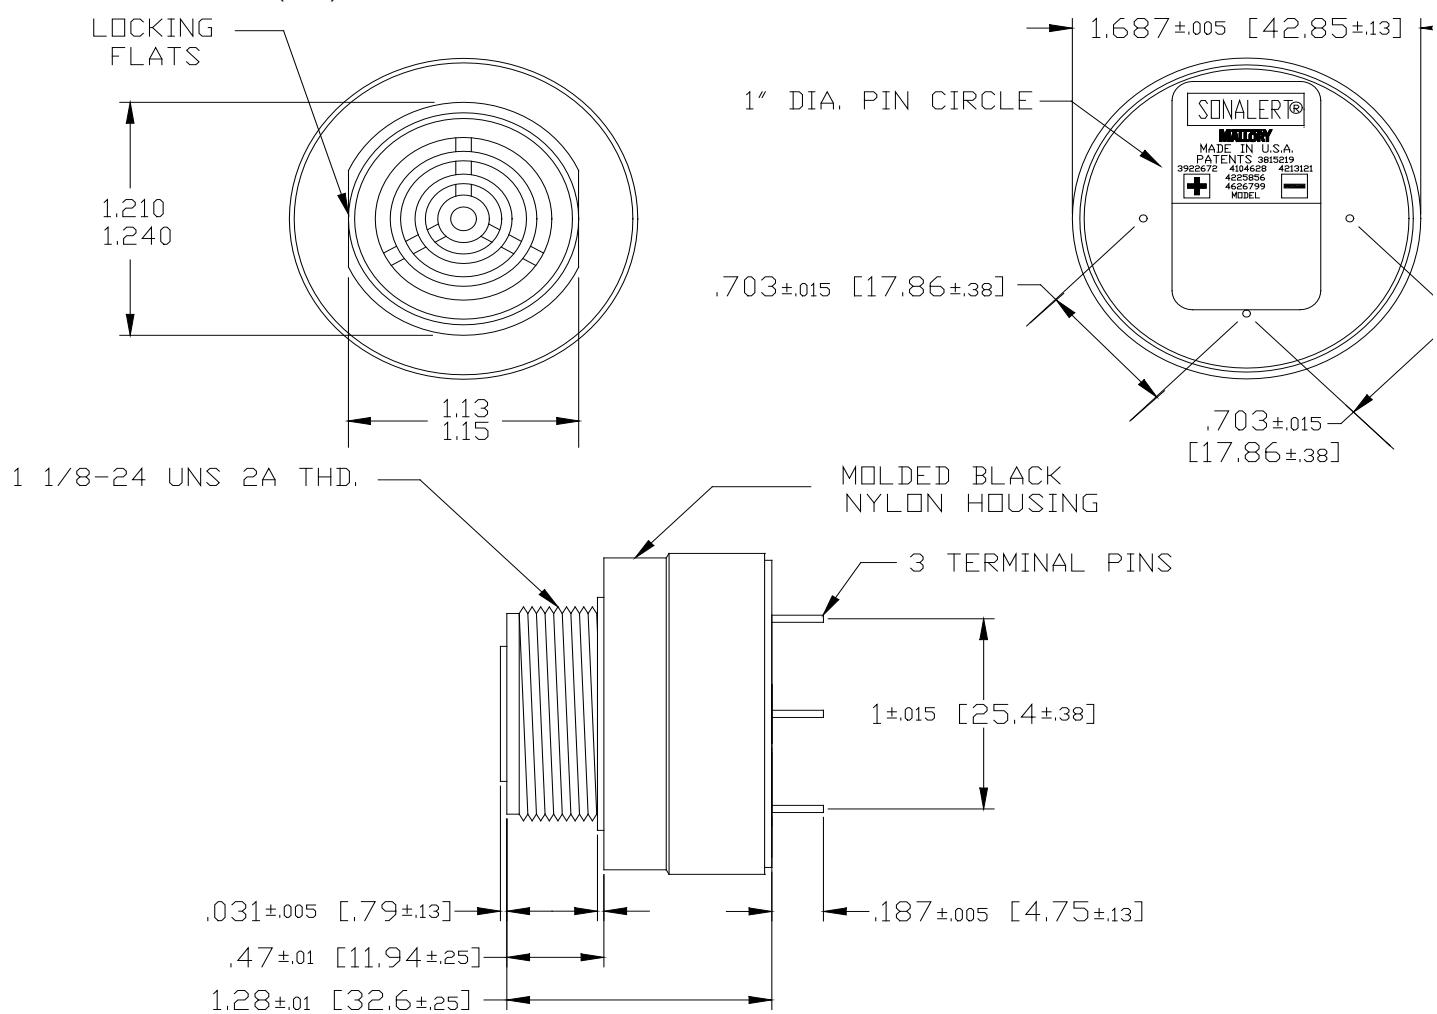
Part #:

SC616N-3**Sales Outline Drawing**

Revision:

D**Specifications:**

| | |
|-----------------------|------------------------------|
| Sound Level Category | Loud |
| Mode of Operation | Continuous |
| Voltage Rating | 6 to 16 VDC |
| Frequency | 2900 \pm 500 Hz |
| Loudness @ Min Vdc | 80 dB(A) @ 2 Feet and 6 Vdc |
| Loudness @ Max Vdc | 95 dB(A) @ 2 Feet and 16 Vdc |
| Current Draw | 6-22 mA |
| Housing Material | 6/6 Nylon, Color: Black |
| Storage Temperature | -40° to +85° C |
| Operating Temperature | -30° to +65° C |
| Mounting | PC Board |
| Weight (Typical) | 1.6 oz (45g) |
| Options | Please contact factory. |

Dimensions: Inches (mm)

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Mallory Sonalert:](#)

[SC616N-3](#)