

Alchip™-MVK-BP Series

- Bi-polar chip type for the circuit, of which polarity is frequently reversed
- Solvent resistant type (see PRECAUTIONS AND GUIDELINES)
- RoHS Compliant




SPECIFICATIONS

Items	Characteristics							
Category	Temperature Range							
Rated Voltage Range	-40 to +105℃							
Capacitance Tolerance	6.3 to 50V _{dc}							
Leakage Current	±20% (M) (at 20℃, 120Hz)							
Dissipation Factor (tanδ)	I=0.05CV or 10μA, whichever is greater. Where, I : Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V) (at 20℃ after 2 minutes)							
Low Temperature Characteristics (Max. Impedance Ratio)	Rated voltage (V _{dc})	6.3V	10V	16V	25V	35V	50V	(at 20℃, 120Hz)
	tanδ (Max.)	0.35	0.26	0.24	0.20	0.18	0.18	
Endurance	Rated voltage (V _{dc})	6.3V	10V	16V	25V	35V	50V	(at 120Hz)
	Z(-25℃)/Z(+20℃)	4	3	2	2	2	2	
	Z(-40℃)/Z(+20℃)	10	8	6	4	3	3	
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20℃ after the rated voltage is applied for 1,000 hours at 105℃, however the polarization shall be reversed every 250 hours.							
	Capacitance change	≤±30% of the initial value						
	D.F. (tanδ)	≤300% of the initial specified value						
	Leakage current	≤The initial specified value						


DIMENSIONS [mm]

- Terminal Code : A

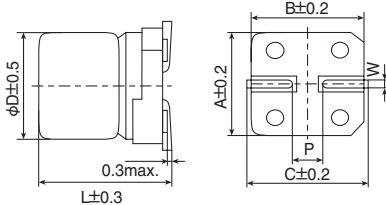

Size code	D	L	A	B	C	W	P
D60	4	5.7	4.3	4.3	5.1	0.5 to 0.8	1.0
E60	5	5.7	5.3	5.3	5.9	0.5 to 0.8	1.4
F60	6.3	5.7	6.6	6.6	7.2	0.5 to 0.8	1.9


PART NUMBERING SYSTEM

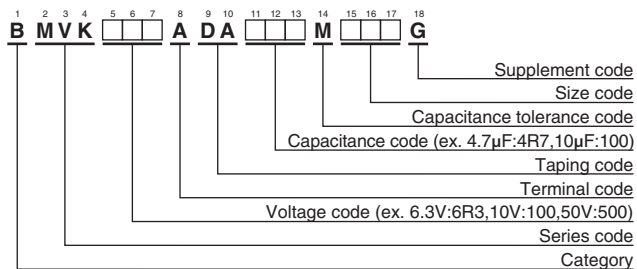

Please refer to "Product code guide (surface mount type)"

MARKING

EX) 35V4.7μF



STANDARD RATINGS

WV (V _{dc})	Cap (μF)	Size code	tanδ	Rated ripple current (mA _{rms} /105°C, 120Hz)	Part No.
6.3	10	D60	0.35	14	BMVK6R3ADA100MD60G
	22	E60	0.35	25	BMVK6R3ADA220ME60G
	47	F60	0.35	39	BMVK6R3ADA470MF60G
10	33	F60	0.26	35	BMVK100ADA330MF60G
	4.7	D60	0.24	12	BMVK160ADA4R7MD60G
	10	E60	0.24	20	BMVK160ADA100ME60G
16	22	F60	0.24	32	BMVK160ADA220MF60G
	3.3	D60	0.20	10	BMVK250ADA3R3MD60G
	2.2	D60	0.18	8.8	BMVK350ADA2R2ME60G
35	4.7	E60	0.18	15	BMVK350ADA4R7ME60G
	10	F60	0.18	23	BMVK350ADA100MF60G
50	1.0	D60	0.18	5.5	BMVK500ADA1R0MD60G
	2.2	E60	0.18	10	BMVK500ADA2R2ME60G
	3.3	E60	0.18	13	BMVK500ADA3R3ME60G
	4.7	F60	0.18	16	BMVK500ADA4R7MF60G

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[United Chemi-Con \(UCC\):](#)

[BMVK500ADA3R3ME60G](#) [BMVK800ARA330MKD5S](#) [BMVK800ARA330MKE0N](#) [BMVK800GDA150MHA0G](#)
[BMVK160ADA220MF60G](#) [BMVK800ARA330MKE0S](#) [BMVK250ADA3R3MD60G](#) [BMVK800GA150MHA0G](#)
[BMVK100ADA330MF60G](#)