


THIS DRAWING IS UNPUBLISHED.	RELEASED FOR PUBLICATION	- , - .
© COPYRIGHT - By - ALL RIGHTS RESERVED.		

SHRINK TUBING	MIL-I-23053	
RETAINING CLIP	BeCu ASTM-B-194 OR STAINLESS STEEL PER QQ-S-766	
SOCKET CONTACT	BERYLIUM COPPER PER ASTM B196	GOLD PLATE MIL-G-45204
HOUSING	GLASS REINFORCED VALOX & EPOXY	
GROMMET	FLUROROSILICONE	
DESCRIPTION	MATERIAL	FINISH

LOC	DIST	REVISIONS					
DF	AO	P	LTR	DESCRIPTION	DATE	DWN	APVD
			K	REV PER ECO-12-000064	23JAN12	PY	DE

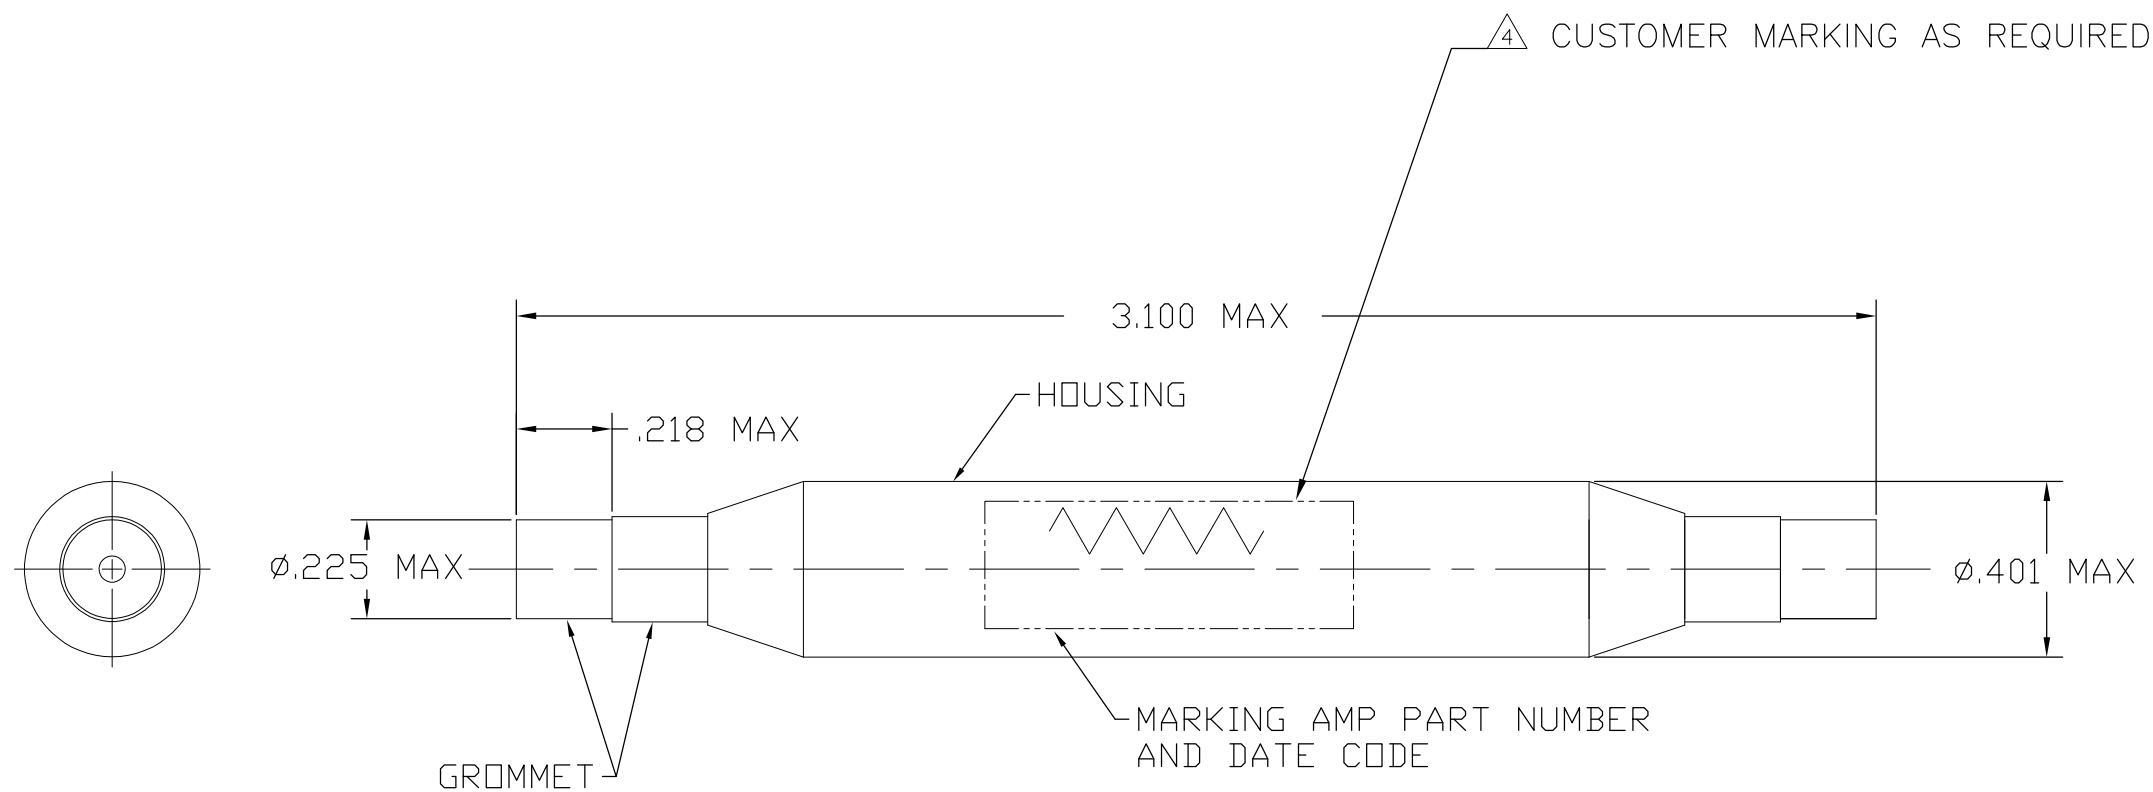

- ③ ENVIRONMENTS CREATED DURING OPERATION WHICH EXCEEDS THE WIRE SPLICING RATED PERFORMANCE IS THE RESPONSIBILITY OF THE USER. THE RESISTOR SPECIFICATIONS SHOULD BE CONSULTED.
- ② PIN CONTACT, SEALING PLUGS & INSERTION/EXTRACTION TOOL TO BE ORDERED SEPARATELY.
- A) PIN CONTACT: 2-592404-1
B) SEALING PLUG: 592104-1
C) TOOL 592105-1

- △ THIS ASSEMBLY MEETS OR EXCEEDS THE GENERAL REQUIREMENTS OF MIL-T-81714.

		—	RLR20C2202GR	±2°	1/2	22K	1-591917-4
		—	RLR32C1000GR	±2°	1	100	1-591917-3
		—	RLR07C1001GR	±2°	1/4	1K	1-591917-2
	OBSOLETE	—	—	±1°	1/2	100K	1-591917-1
	OBSOLETE	—	—	±1°	1/2	10K	1-591917-0
	OBSOLETE	—	—	±1°	1/4	2.2K	591917-9
	OBSOLETE	—	—	±1°	1/4	127	591917-8
	OBSOLETE	—	RLR32C1000GS	±2°	1	100	591917-7
	OBSOLETE	—		±1°	1/2	100	591917-6
		—	RLR32C1201GM	±2°	1	1.2K	591917-5
		—	RC20GF681J	±5°	1/2	680	591917-4
		—	RNC60J1002FS	±1°	1/8	10K	591917-3
		12810-1	RN65C1270F	±1°	1/2	127	591917-2
		—	RN65C1270F	±1°	1/2	127	591917-1
	COMMENTS	CUST MARKING 	RESISTOR SPEC	% TOLERANCE	WATTS	OHMS	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 08NDV2001 T. THOMPSON CHK 03-10-96 C. CHEHOVIN APVD 03-10-96 C. CHEHOVIN		 TE Connectivity	
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	
		0 PLC ± - 1 PLC ± - 2 PLC ± .01 3 PLC ± .005 4 PLC ± - ANGLES ± -		WIRE SPLICE, SINGLE SIZE 20	
MATERIAL		FINISH		SIZE GAGE CODE DRAWING NO RESTRICTED TO	
-		-		A2 00779 C-591917 -	
CUSTOMER DRAWING				SCALE 1: 1 SHEET 1 OF 1 REV K	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-591917-3](#)