
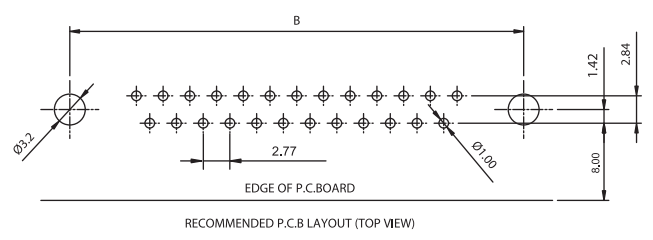

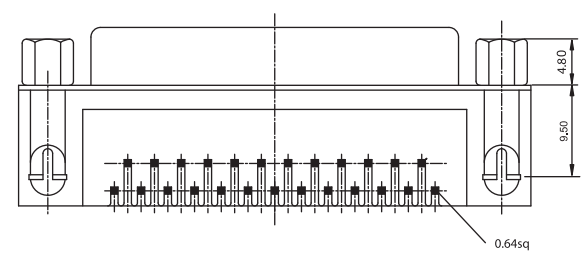


1 2 3 4 5

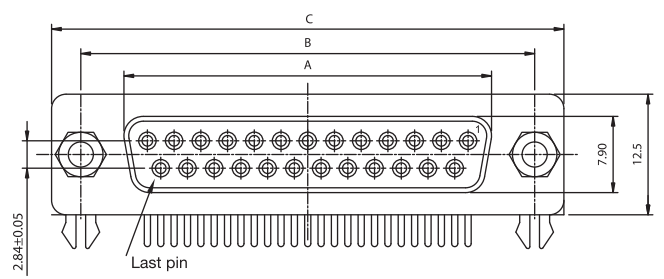

TECHNICAL CHARACTERISTICS

MATERIAL  
 INSULATOR: PBT  
 FLAMABILITY RATING: UL94-V0  
 COLOR: BLACK  
 CONTACT MATERIAL: COPPER ALLOY  
 CONTACT TYPE: STAMPED  
 CONTACT PLATING: GOLD  
 SHIELDING: STEEL NICKEL PLATED  
 QUALITY CLASS: 3 AS PER IEC60 603-13

ENVIRONMENTAL  
 OPERATING TEMPERATURE: -40 UP TO 85°C  
 COMPLIANCE: LEAD FREE AND ROHS

ELECTRICAL  
 CURRENT RATING: 3A  
 WORKING VOLTAGE: 125V AC  
 INSULATOR RESISTANCE: >5000 MOHM  
 DIELECTRIC WITHSTANDING VOLTAGE: 1000V AC/MN  
 CONTACT RESISTANCE: 30 mOHM MAX

SOLDERING: WAVE PROCESS ONLY

PACKAGING  
 TRAY

ACCESSORIES  
 UNC 4-40 RIVET / FIXED HEX-SCREW / BOARD LOCK

DIMENSION

PINS	A	B	C
9	16.9	25.0	30.8
15	25.2	33.3	39.2
25	38.6	47.1	53.1
37	55.4	63.5	69.4

A  
B  
C

RoHS Compliant			
G			
F	20-NOV-12	PLATING	GG
E	05-NOV-12	UL	GG
D	23-FEB-12	DRAWING	GG
C	07-DEC-09	WORKING VOLT.	JP
B	19-NOV-09	STANDARD	JP
A	21-SEP-09	PINNING	JP
REV	DATE	FILE	BY

PROJECTION:	
APPROVAL: RJ	

GENERAL TOLERANCE
X. = $\pm$ 0.5
.X = $\pm$ 0.3
.XX = $\pm$ 0.2

UNIT: MM
SCALE:
SHEET: 1/1
DRAW: PEARL

**WÜRTH ELEKTRONIK**

DESCRIPTION: D-SUB FEMALE ANGLED PCB CONNECTOR - 8.08MM WITH SCREWS	
WERI PART NO: 618 0xx 231 121	

SIZE  
**A4**

D

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Wurth Electronics:](#)

[618025231121](#) [618015231121](#) [618009231121](#)