

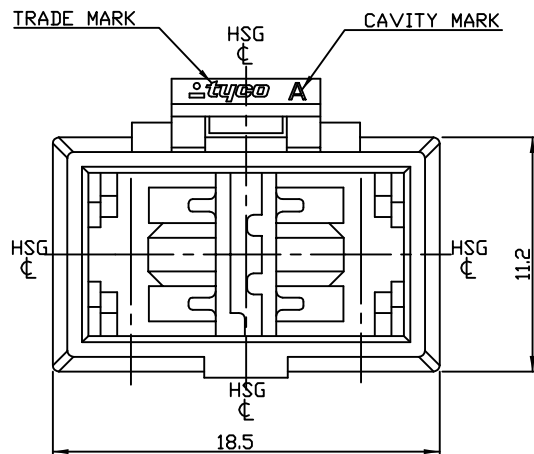
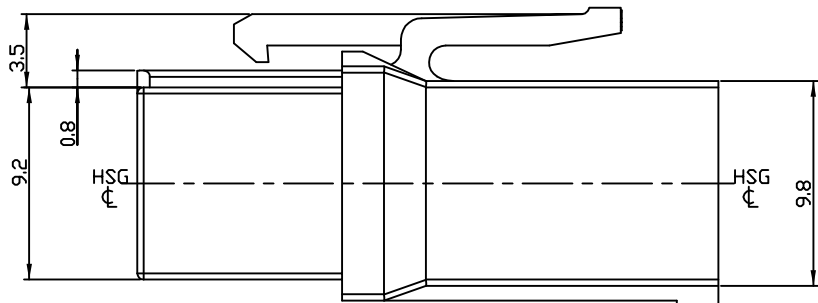
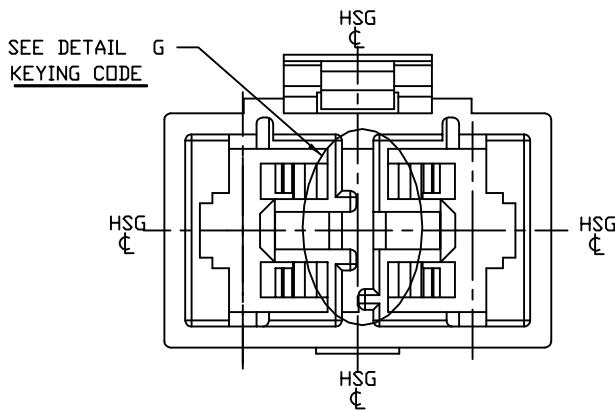
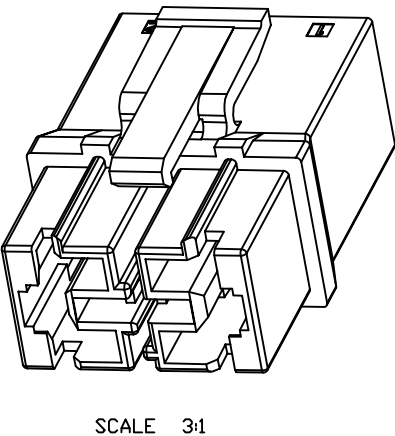
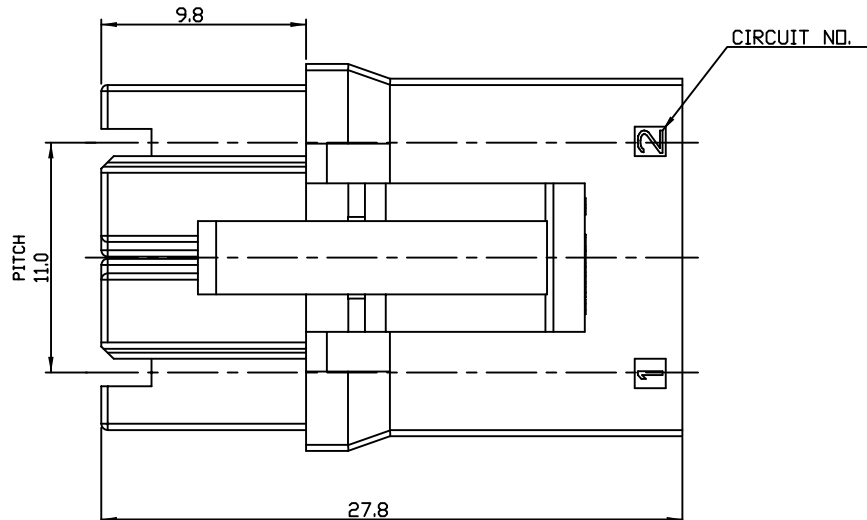


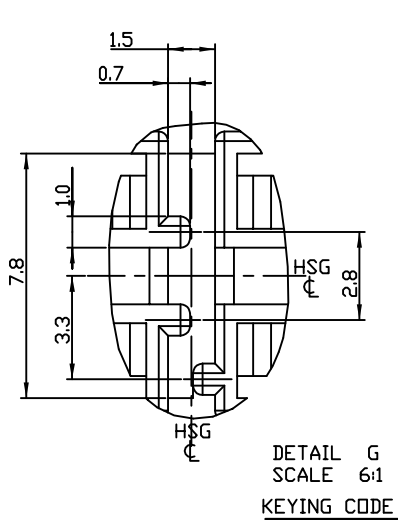

6 TABLE 1(SEE DATA1 G)

TYPE	A	B	C	D
KEYING LOCATION				

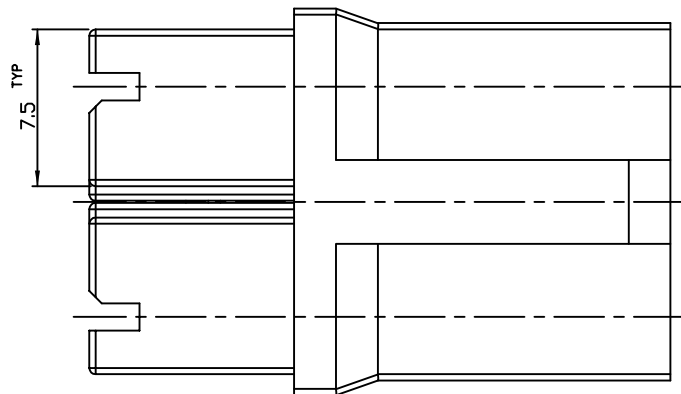

- NOTES
- 1.GENERAL TOLERANCES : ±0.2
- 2.MATERIAL : 6/6 NYLON,UL94V-0
- 3.MATERIAL : PC/PET, UL94V-0
- PARTS COMPLY WITH GWT 750
- 4.MATING HDR ASS'Y P/N : 1743330-□
- 5.APPLICABLE CONTACT P/N : 1743457-1
- 6.KEYING LOCATION : TABLE1,DETAIL G

1-1743419-6	D	3	BLUE
1-1743419-4	C		YELLOW
1-1743419-2	B		RED
1-1743419-1	A		NATURAL
OBSOLETE 1-1743419-6	D	2	BLUE
OBSOLETE 1-1743419-4	C		YELLOW
1743419-2	B		RED
1743419-1	A		NATURAL
P/N	TYPE	MATERIAL	COLOR

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN SC KIM	TE Connectivity	
DIMENSIONS: mm		CHK BW KANG	NAME	
TOLERANCES UNLESS OTHERWISE SPECIFIED.		APVD JK SONG	PRODUCT SPEC	
0 PLC ± -		108-61068		
1 PLC ± -		APPLICATION SPEC		
2 PLC ± -		SIZE CAGE CODE DRAWING NO		
3 PLC ± -		A2 00779 C= 1743419		
4 PLC ± -		RESTRICTED TO		
ANGLES ± -		WEIGHT		
FINISH		CUSTOMER DRAWING		
SEE NOTE 2 3		SCALE N/S SHEET 1 OF 1 REV B2		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1743419-1](#)