



REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	G	REV & REDRAW/0720-0603-95	10OCT95	MLE	NB
	G1	REVISED PER ECO-17-007400	04DEC2017	RS	DR

AMP WIRE RANGE	 E13288 Listed	 LR7189 Certified
16-14 AWG SOLID OR STRANDED	16-14 AWG SOLID OR STRANDED	16-14 AWG SOLID OR STRANDED

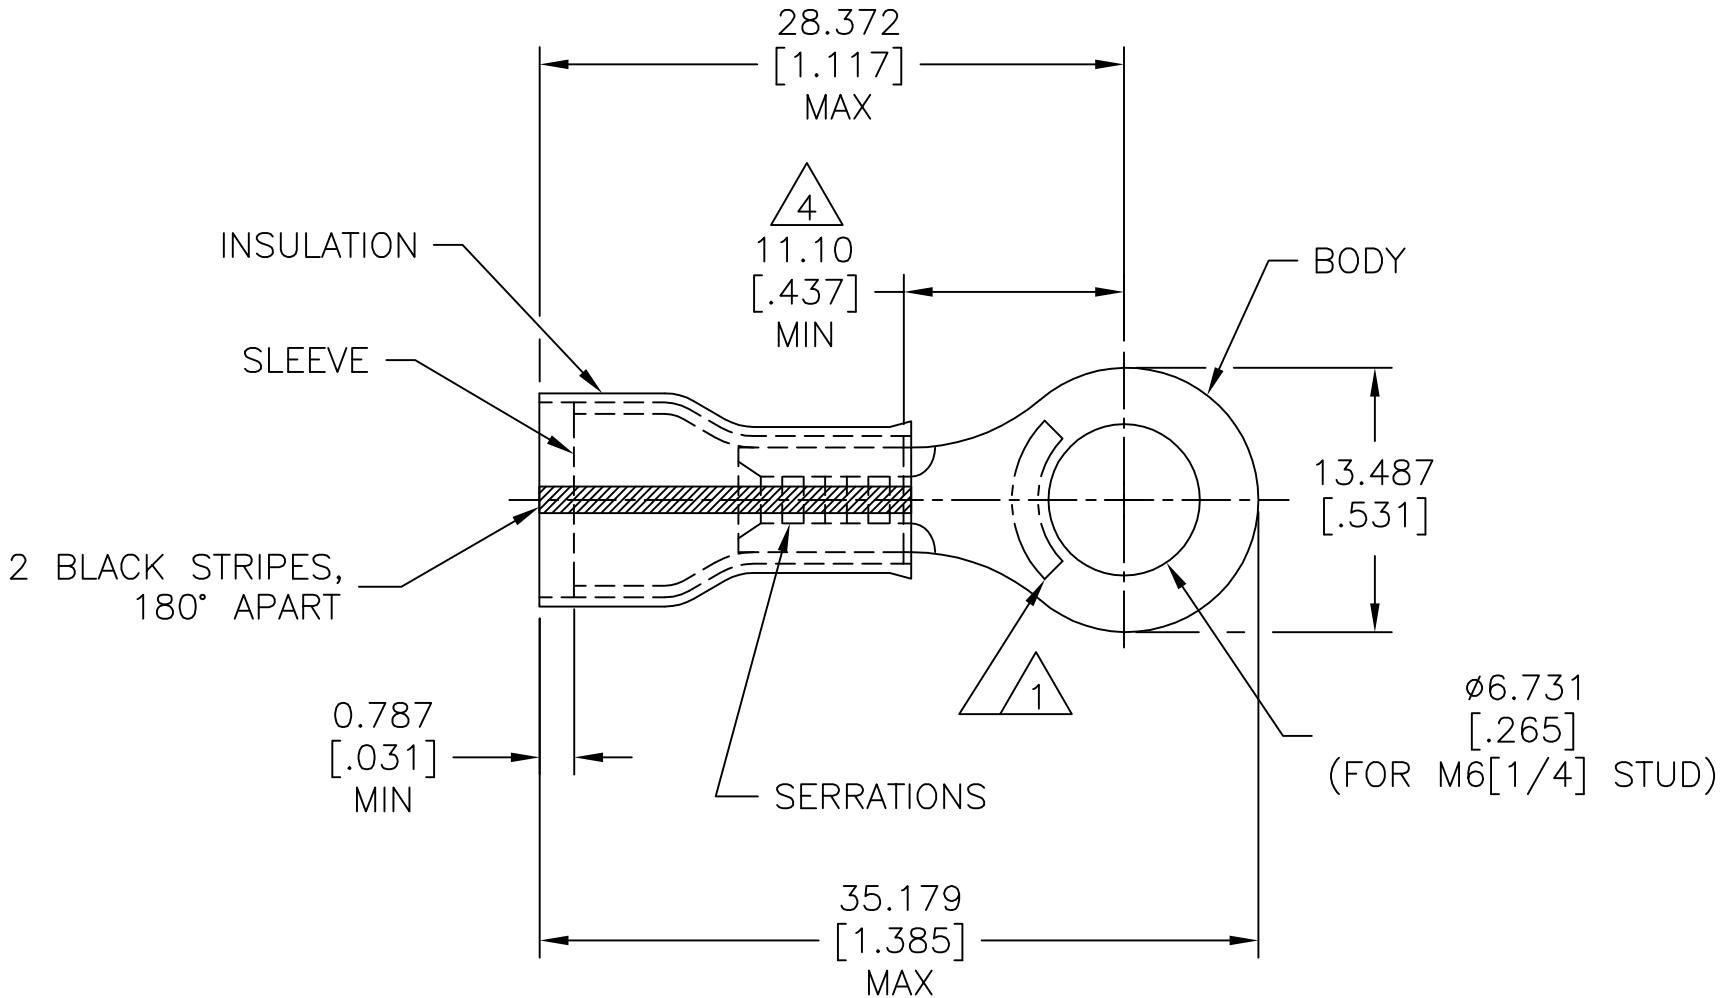

- 1 STAMP AMP 16-14 HD* APPROX AS SHOWN.
- 2 WIRE INSULATION, $\phi 4.318-7.620[\phi .170-.300]$
- 3 BODY MATERIAL THK, $1.219\pm 0.051[.048\pm .002]$
- 4 APPLIES FROM EDGE OF METAL WIRE BARREL TO CENTER OF STUD HOLE.

500	LOOSE PIECE	35362
QTY	PACKAGE TYPE	PART NO

AMP INCORPORATED CUSTOMER SERVICE SYSTEMS			THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN M ELLIS 17APR95 CHK C PRESNELL 17APR95 APVD N BIRCH 17APR95 PRODUCT SPEC UL 486 A-B APPLICATION SPEC 114-2157 WEIGHT — CUSTOMER DRAWING		 TE Connectivity NAME TERMINAL, RING TONGUE, PIDG™ WIRE SIZE, 16-14HD AWG SIZE A3 CAGE CODE 00779 DRAWING NO C=35362 RESTRICTED TO — SCALE 4:1 SHEET 1 OF 1 REV G1			
FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS	PRODUCT INFORMATION CENTER 1-800-522-6752	MAX RECOMMENDED OPERATING TEMPERATURE: 105°C [221°F] MAX	DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± — 1 PLC ± — 2 PLC ± — 3 PLC ± 0.127[.005] 4 PLC ± — ANGLES ± —					
		VOLTAGE RATING: 300 V MAX								
FOR APPLICATION TOOLING INFORMATION	TOOLING ASSISTANCE CENTER 1-800-722-1111	WIRE CROSS SECTIONAL AREA RANGE, 2.62-6.64mm²[5,180-13,100] SOLID OR STRANDED	MATERIAL BODY,SLV,COPPER PER ASTM B 152 INSULATION: PVC,	FINISH BODY & SLV,TIN PLATE PER ASTM B545 INSULATION: COLOR-YELLOW						
FOR ORDER ENTRY	1-800-526-5142									

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[35362](#)