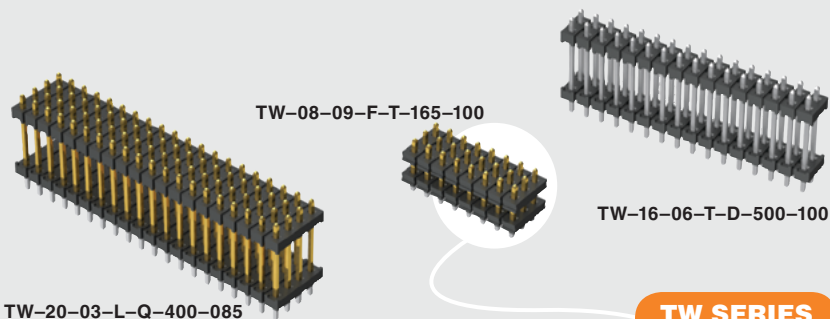


**TW SERIES**

THROUGH-HOLE BOARD STACKERS

- Choice of one through six rows

TW
NO. PINS PER ROW
LEAD STYLE
PLATING OPTION
ROW OPTION
STACKER HEIGHT
TAIL SPEC

02 thru 50

Specify LEAD STYLE from chart below.

–F
= Gold flash on post, Matte Tin on tail

–L
= 10 μ" (0.25 μm) Gold on post, Matte Tin on tail

–T
= Matte Tin

–S
= Single Row

–D
= Double Row

–T
= Triple Row

–Q
= Four Row

–5
= Five Row

–6
= Six Row

–“XXX”
= Stacker Height in inches (0.13 mm) .005 increments
Example: –250 = (6.35 mm) .250"

–“XXX”
= Tail Length in inches (0.13 mm) .005 increments
Example: –150 = (3.81 mm) .150"

–“XXX”
= Polarized Position (Specify position to be removed)

04
(2.00) .0787 TYP
01
–S, –D*, –Q
300
No. of rows X (2.00) .0787
295
–T, –5, –6

POST
TAIL
(0.51) .020 SQ
(1.27) .050 MIN
(0.00) .000 MIN
(2.00) .0787
STACKER HEIGHT See Chart
OAL
–S, –D*, –Q
–T, –5, –6

LEAD STYLE	OAL
–01	(8.20) .323
–02	(9.60) .377
–03	(13.60) .535
–04	(14.10) .555
–05	(15.10) .594
–06	(17.10) .673
–07	(19.10) .751
* –08	(21.10) .830
* –09	(11.60) .456
–10	(15.60) .614
–11	(10.08) .397
* –12	(28.19) 1.110

* Style –08 & –12 = S & D only

ROW OPTION	STACKER HEIGHT
–S, –D*, & –Q	(3.05) .120 MIN
–T, –5, –6	(4.06) .160 MIN

* –D with stacker height greater than (4.06 mm) .160" will not have standoffs.

*All parts within this catalog are built to Samtec's specifications.
Customer specific requirements must be approved by Samtec and identified in a Samtec customer-specific drawing to apply.*

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Samtec:](#)

[TW-10-03-T-S-250-143](#)