

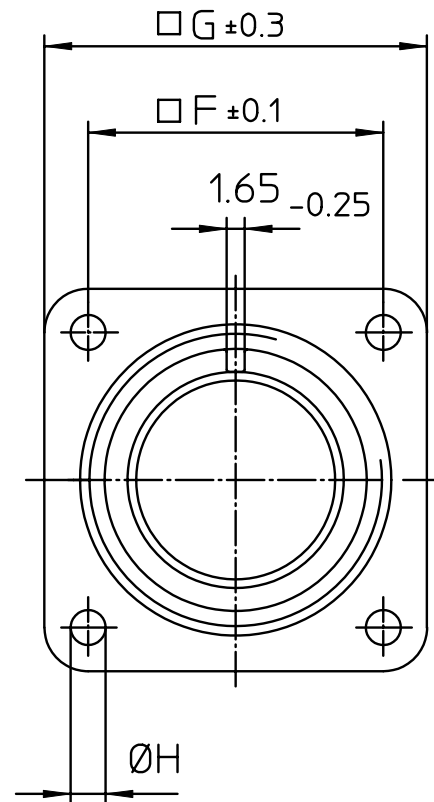


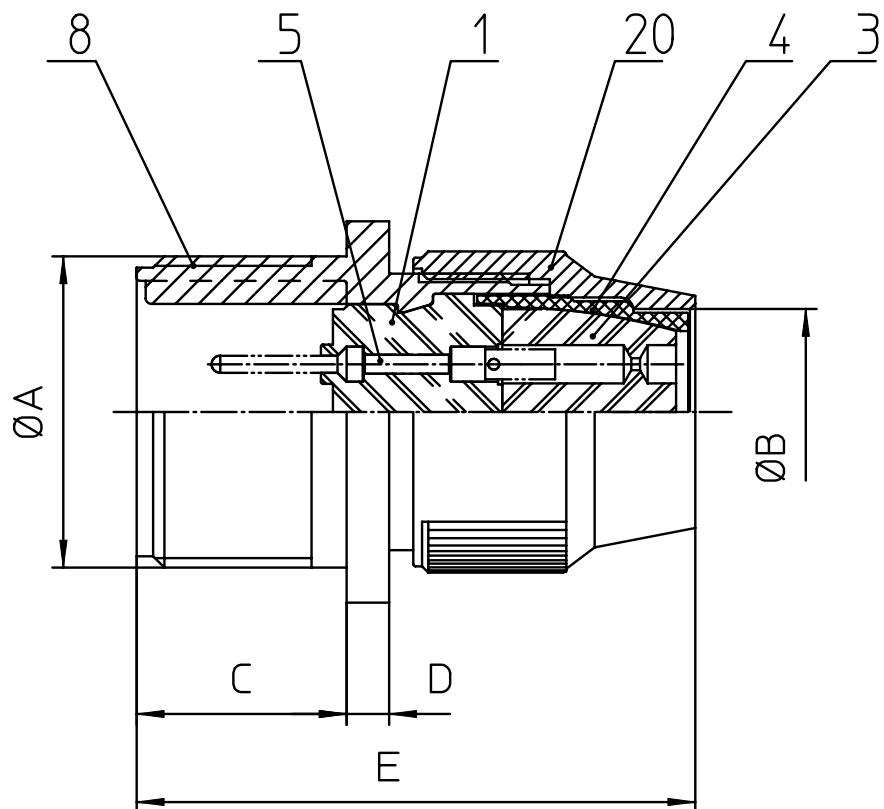

| NO. | MASSE / DIMENSION |
|-----|-------------------|
| A   | 2-18NS-2A         |
| B   | 38.5              |
| C   | 22.2              |
| D   | 3.2               |
| E   | 53                |
| F   | 44.5              |
| G   | 57                |
| H   | 4.4               |

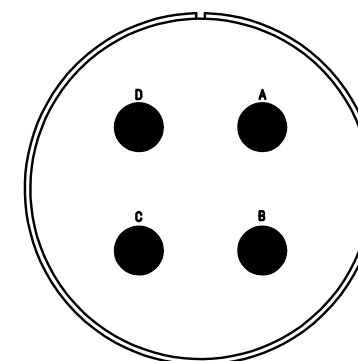

| NO. | BESCHREIBUNG / DESCRIPTION          |
|-----|-------------------------------------|
| 1   | ISOLIERKÖRPER STIFT / INSULATOR PIN |
| 3   | DICHTKÖRPER / GROMMET               |
| 4   | ENDRING / ENDRING                   |
| 5   | KONTAKTSTIFT/ CONTACT PIN           |
| 8   | DOSENGEHÄUSE / SHELL                |
| 20  | KURZES ENDGEHÄUSE/SHORT ENDBELL     |

Note: Due to an automatic nomenclature system, numbers generated may not be sequential.

Specification and Dimensions subject to change  
Drawings illustrate normal insulator positioning

#### Material Specification:

|                     |                                                  |
|---------------------|--------------------------------------------------|
| Shell Material:     | Aluminium alloy                                  |
| Shell Plating:      | Olive drab chromate coating over cadmium plating |
| Insulator Material: | Neoprene                                         |
| Contact Material:   | Copper alloy                                     |
| Contact Plating:    | Hard silver                                      |

all dimensions are in mm  
Dimensions without tolerance indications are general tolerances in acc. with DIN7168m

drawing for  
CUSTOMER



description  
**CA3100R32-17P-F80**  
Wall mounting receptacle  
Shortened light-weight endbell without cable clamp  
AWG Crimp / Pin / Layout: 32-17

© All rights reserved. Reproduction or issue to third in any form  
whenever is only permitted with written authorization of ITT Cannon



page  
1/1  
revision  
1001 16. Jul 20