




D

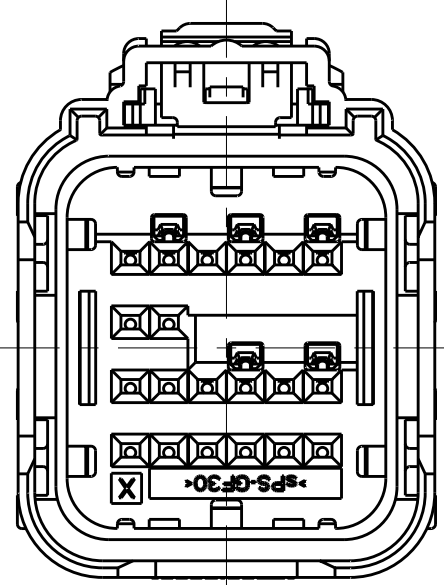




OPTION "B"

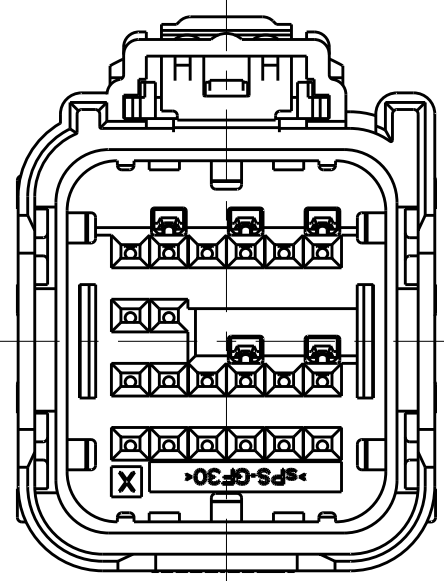

OPTION "D"

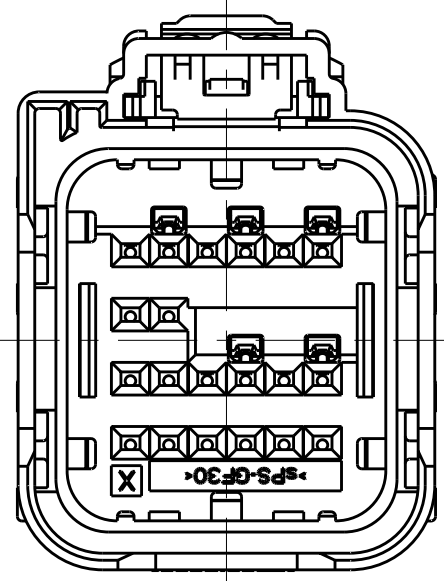


OPTION "F"

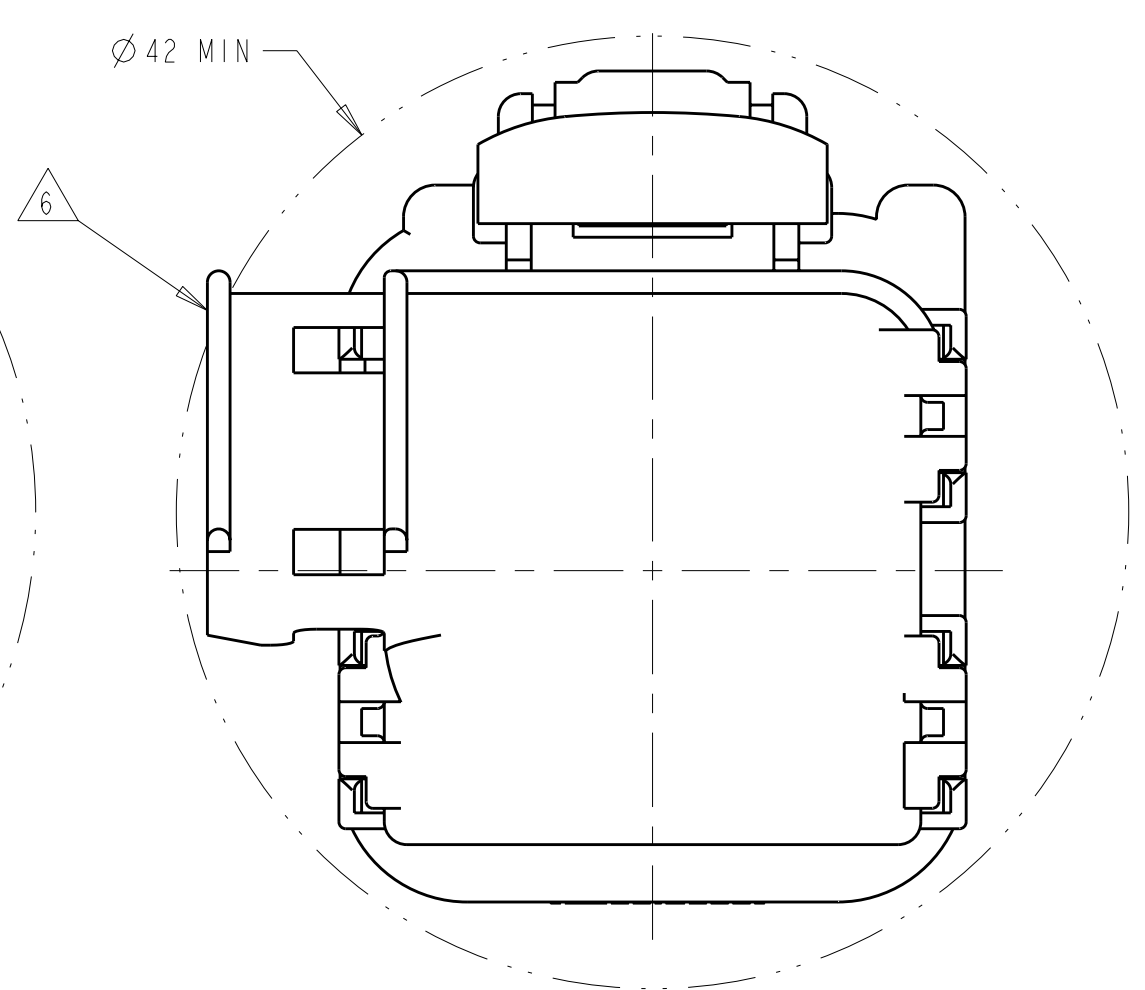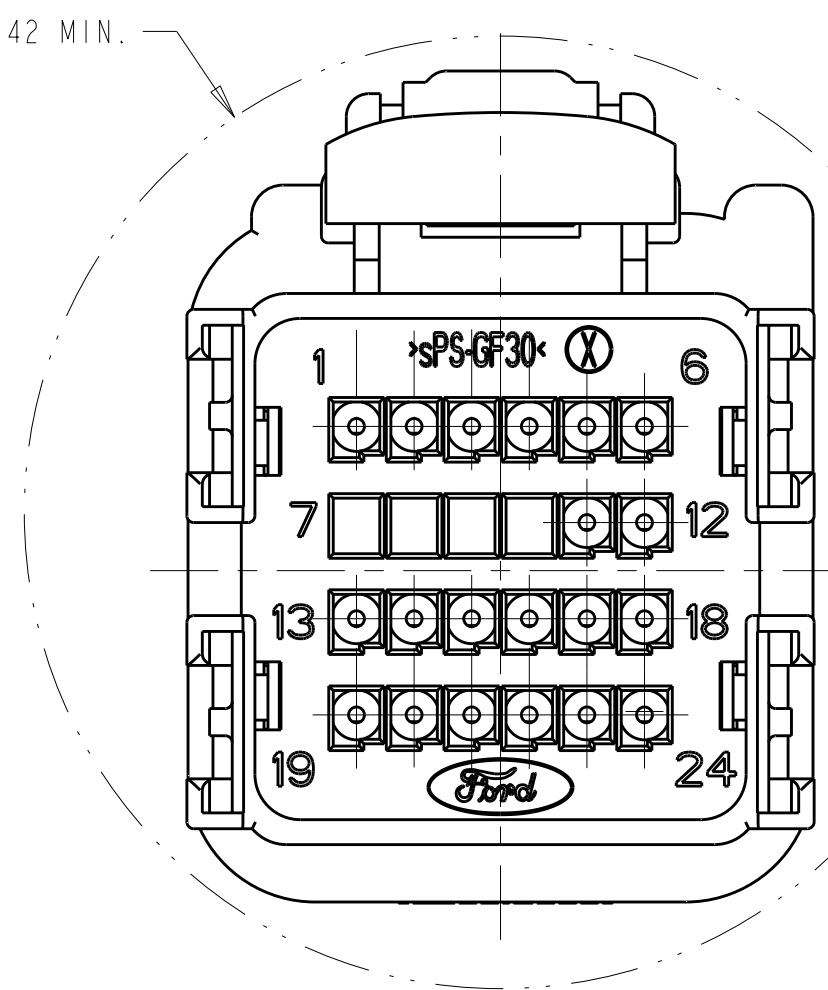


MINIMUM FEED THROUGH CONDITION
WITH 1mm CLEARANCE ALL AROUND
SHOWN WITH OPTION WIRESHIELD

C

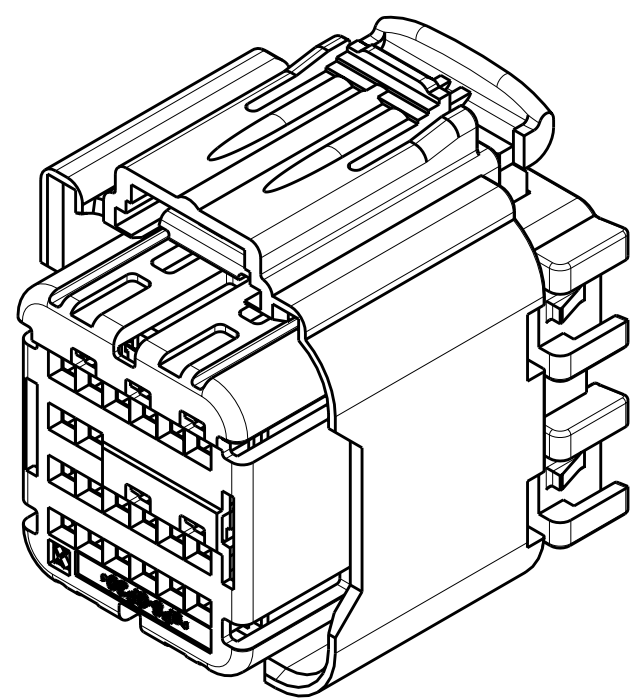

SCALE 2:1

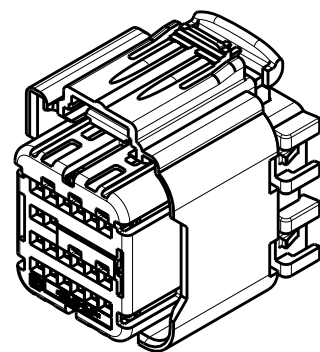

KEYING OPTION "A" SHOWN

AMP 4805 REV 31MAR2000

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[3-1924672-6](#)