





Dimensions: mm (in.)

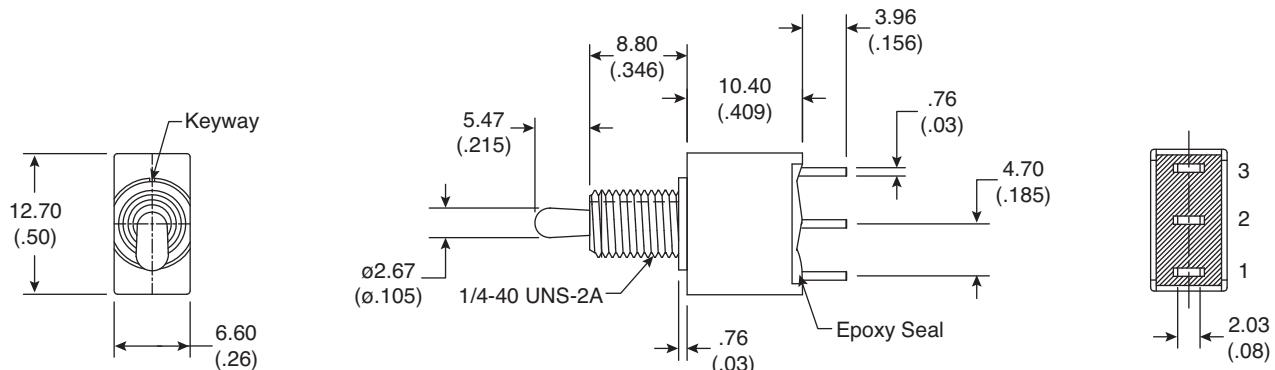


POS.1	POS.2
	
ON	ON
2-3	2-1
	

Switch Function

Without locking ring



Without standard locking ring

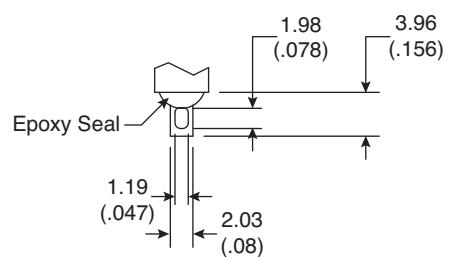

Epoxy Seal

Panel MountingSolder Lug**Electrical Specifications:**

- Contact resistance: 10mΩ max. initial @ 2-4VDC 100mA
- Insulation resistance: 1,000MΩ min.
- Dielectric strength: 1,000 V RMS@sea level
- Rating: 2A / 250VAC; 5A / 120VAC or 28VDC

Mechanical Specifications:

- Mechanical life: 30,000 make-and-break cycles
- Operating temperature: -30°C to 85°C

Note:

- RoHS Compliant by Exemption

Soldering Process:

- Manual Soldering: Use soldering iron of 30 watts, controlled at 350°C approximately 5 sec. while applying solder.
- Wave Soldering: Recommended Soldering Temperature: 260±5°C Duration of Solder Immersion: 5±1 sec. (PCB is 1.6mm in thickness)

Sealed Miniature Toggle Switch
108-1AS1T2184-EVX

Mountain
Switch

Available from Mouser Electronics

www.mouser.com

1-800-346-6873

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Mountain Switch:](#)

[108-1AS1T2184-EVX](#)